

Computer- & Network accessories 2009

DIRECT



Active network components



Passive network components



HDMI products



Bluetooth products



USB & Firewire products



Notebook accessories



Interface cards



Datacom / KVM



Cables / Adapters

About



Foundation and draught

In 2001 the 2direct GmbH was founded and operates as an international trading company since then. To control the flow of goods from the Far East, the shareholders formed 2direct Asia Limited with headquarters in Taipei, Taiwan in 2006. The establishment of additional offices in Europe and Asia are planned to ensure that these markets are local with high efficiency and direct proximity to the customer support. Core business is the manufacture and distribution of computer and network products. Since 2direct GmbH was founded the company was able to expand sales and earnings strongly.




Products and quality

2direct Ltd is convincing with a big portfolio on computer and network products and is the result of the combination of important key technologies, continuous innovation, to prize-winning Designs and an excellent price-performance-ratio. In this area ours is embedded throughout Europe protected own brand „LogiLink“, under which we Retail-and Distribution markets serve. Before the shipment and the import all products are subject of a strict quality assurance in the producer country around highest possible demands will.



Distribution and logistics

Customer satisfaction is our measure of success. With good availability, attractive pricing, high product availability, loyal shedule deliveries, a professional warranty as well as meeting demand marketing support for distribution the 2direct GmbH his product portfolio in Europe and exclusively in B2B enterprises. From our European warehouse in Lüdenscheid the fast and accurate shipping with specially selected logistic companies takes place. By order manufacturing we steer create when required the goods river of Asia directly to the customer and with it shorter routes of transport as well as savings of the relation additional costs for the customer.

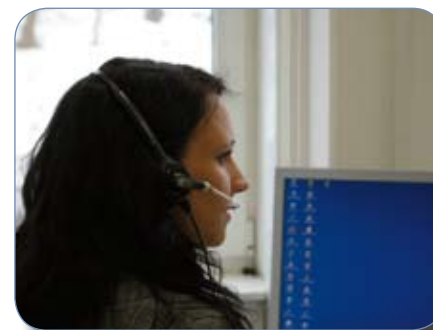

After sales and support

With the delivery of good to customers, our work is not done. In our extensive web site we always keep current Drivers and manuals in several languages for you, even if the product is not available any more. With a hotline for end customers we relieve you and guarantee that you can follow your core business. If there is a complaint case come, we guarantee a prompt and professional settlement to exchange with you and your customers.

Table of contents

Active network components

Wireless LAN	Page 4 - 9
Fast Ethernet	Page 10 - 12
Gigabit	Page 11 - 12
IP Camera	Page 13 - 14
Printserver	Page 15 - 16
Powerline	Page 17
TP-Link	Page 18 - 19

Passive network components

CAT5e / CAT6 Surface Modular	Page 20
CAT5e / CAT6 Patch Panel	Page 21 - 21
Plugs etc.	Page 22 - 23
Patch Cables	Page 24
Raw Cables	Page 25 - 26
Tools / Tester	Page 27

HDMI products

HDMI Switches / Splitter / Extender	Page 28
HDMI Cable & Adapter	Page 28 + 67

Bluetooth products

Bluetooth Adapter & Headsets	Page 29
------------------------------------	---------

USB & FireWire products

Cardreader	Page 30 - 31
Hubs & Multimediapanel	Page 31 - 32
Adapter	Page 32 - 34
Input devices	Page 35 - 37
Headsets & Accessories	Page 37 - 38
7" Digital Photo Frames	Page 39
HDD Cases & Quickports	Page 40 - 41
Accessories	Page 42 - 43

Notebook accessories

DVBT / Locks / AC Adapters etc.	Page 44 - 47
Notebook Bags	Page 48 - 49

Interface cards

PCI Cards	Page 50 - 52
PCI Express Cards	Page 52 - 53
PC Cards	Page 54
Express Cards	Page 55

Datacom / KVM

KVM	Page 56 - 57
Splitter	Page 57 - 58
DVI / HDMI	Page 59
15" & 17" Consoles	Page 60
ATEN	Page 62 - 66

Cables / Adapters

HDMI / Display Port	Page 67 - 68
VGA	Page 69
USB 2.0 / USB 3.0	Page 70
IEEE1394	Page 71
S-ATA / e-SATA	Page 72
Power Cables	Page 71-73

Wireless LAN 54MBit USB 2.0 Adapter

LogiLink



Wireless LAN 54MBit USB 2.0 Adapter
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Interface: USB 2.0 (USB 1.1 compatible)
 Chipset: Realtek
 Plug & Play

Part.no. WL0006

Wireless LAN 54MBit USB 2.0 Turbo Adapter

LogiLink



Wireless LAN 54MBit USB 2.0 Adapter
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Detachable and slewable antenna
 Frequency range: 2400-2483.5 MHz
 Interface: USB 2.0 (USB 1.1 compatible)
 Chipset: Ralink
 Plug & Play

Part.no. WL0025

Wireless LAN 54MBit PCI Card

LogiLink



Wireless LAN 54MBit PCI Card
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Detachable and slewable antenna
 Frequency range: 2400-2483.5 MHz
 Chipset: Realtek
 Plug & Play

Part.no. WL0002

Wireless LAN 54MBit PCI Card

LogiLink



Wireless LAN 54MBit PCI Card
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Slewable antenna
 Frequency range: 2400-2483.5 MHz
 Chipset: Realtek
 Plug & Play

Part.no. WL0039

Wireless LAN 54MBit PC Card

LogiLink



Wireless LAN 54MBit PC Card
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Realtek
 Plug & Play

Part.no. WL0003

Wireless LAN Booster

LogiLink



Amplifier for wireless LAN signal
 Reversible stages of 100mW, 200mW or 500mW
 Supports Wireless LAN standards 802.11b/g
 Input: 1x SMA connector as input
 Output: 1x SMA connector as output
 Under the current rules in germany the transmission power of wireless LAN devices may not exceed 100mW. The operation of an antenna amplifier therefore is possible, however the user must adhere to the limits of the transmission power in germany.

Part.no. WL0033

Wireless LAN 54MBit Access Point

LogiLink



Wireless LAN 54MBit Access Point
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54,22,11, 5.5, 2.0, 1.0 Mbps
 Detachable and slewable antenna
 Ports: 1x RJ45 (LAN)
 Frequency range: 2400-2483.5 MHz
 Link activity, collision, speed
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Supports: WDS and Bridge mode
 DHCP server, MAC access control

Part.no. WL0027

Wireless LAN 54MBit Broadband Router

LogiLink



Wireless LAN Broadband Router with 4-Port Switch
 IEEE 802.11b and IEEE 802.11g
 Wireless LAN: 54, 22, 11, 5.5, 2, 1 Mbps
 Detachable and slewable antenna
 Ports: 1xRJ45 WAN, 4xRJ45 LAN
 Frequency range: 2400-2483.5 MHz
 Chipset: Realtek
 WEP, WPA, WPA2, WPA-PSK (1+2)
 PPOE, PPTP, DHCP, MAC, WDS
 Integrated Firewall

Part.no. WL0038

Wireless LAN Indoor Omni-directional Antenna, 5dbi

LogiLink



Antenna to gain the wireless signal
 Radiation: Omni-directional
 Frequency: 2.4 GHz-2.5 GHz
 Connector: SMA connector
 Impedance: 50 Ohm nominal
 VSWR: 1.92 maximal
 Power Consumption: 1 watt
 IEEE 802.11 a/b/g/n compatible

Part.no. WL0035

Wireless LAN Indoor Omni-directional Antenna, 7dbi

LogiLink



Antenna to gain the wireless signal
 Radiation: Omni-directional
 Frequency: 2.4 GHz-2.5 GHz
 Connector: SMA connector
 Impedance: 50 Ohm nominal
 VSWR: 1.92 maximal
 Power Consumption: 1 watt
 IEEE 802.11 a/b/g/n compatible

Part.no. WL0036

Wireless LAN Indoor Omni-directional Antenna, 9dbi

LogiLink



Antenna to gain the wireless signal
 Radiation: Omni-directional
 Frequency: 2.4 GHz-2.5 GHz
 Connector: SMA connector
 Impedance: 50 Ohm nominal
 VSWR: 1.92 maximal
 Power Consumption: 1 watt
 IEEE 802.11 a/b/g/n compatible

Part.no. WL0037





Wireless LAN 150MBit USB 2.0 Adapter

LogiLink.



Wireless LAN 11 N USB2.0 Adapter
 IEEE 802.11n, 802.11g, 802.11b
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Data rates up to 150 Mbps
 Chipset: Ralink RT3070 Single Chip
 Connector: USB 2.0 (USB 1.1 compatible)
 Super Slim Design, 8.8(H) x 19(W) x 56(D) mm

Part.no. WL0049

Wireless LAN 150MBit USB 2.0 Adapter

LogiLink.



Wireless LAN 11 N USB2.0 Adapter
 IEEE 802.11n, 802.11g, 802.11b
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Data rates up to 150 Mbps
 Chipset: Ralink RT3070 Single Chip
 Connector: USB 2.0 (USB 1.1 compatible)
 Super Slim Design

Part.no. WL0064

Wireless LAN 150MBit USB 2.0 Adapter

LogiLink



Wireless LAN 11N USB 2.0 Adapter
 IEEE802.11n, 802.11b, 802.11g
 Wireless LAN: 150, 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 SMA connector, slewable antenna
 Connector: USB 2.0 (USB 1.1 compatible)
 Data rates up to 150 Mbps
 Chipset: Ralink RT3070
 Software Access Point Function

Part.no. WL0054

Wireless LAN 300MBit USB 2.0 Adapter 1T2R

LogiLink



Wireless LAN 300MBit USB 2.0 Adapter
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Connector: USB 2.0 (USB 1.1 compatible)
 Plug & Play

Part.no. WL0040

Wireless LAN 300MBit USB 2.0 Adapter 2T2R

LogiLink




Wireless LAN 300MBit USB 2.0 Adapter
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Connector: USB 2.0 (USB 1.1 compatible)
 Plug & Play

Part.no. WL0030

Wireless LAN 300MBit PCI Card 1T2R

LogiLink

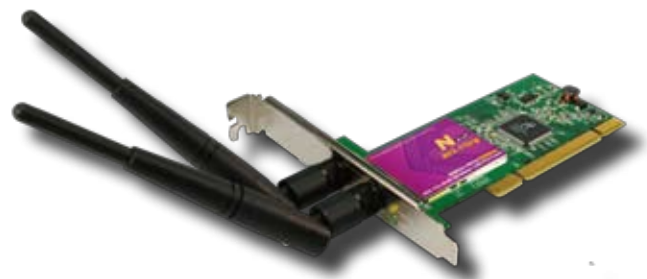

Wireless LAN 300MBit PCI Card
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Connector: PCI 2.1 or 2.2
 Plug & Play

Part.no. WL0042

Wireless LAN 300MBit PCI Card 2T3R

LogiLink



Wireless LAN 300MBit PCI Card
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Plug & Play

Part.no. WL0031

Wireless LAN 300MBit PCI Express Card 2T3R

LogiLink



Wireless LAN 300MBit PCI Express Card
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Plug & Play

Part.no. WL0044

Wireless LAN 300MBit PC Card 2T3R

LogiLink



Wireless LAN 300MBit PC Card
 PC Card Slot: 32 Bit Version
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Plug & Play

Part.no. WL0029

Wireless LAN 300MBit Express Card 2T3R

LogiLink



Wireless LAN 300MBit Express Card
 IEEE 802.11n, 802.11g, 802.11b
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5, 2, 1 Mbps
 WEP, WPA, WPA2, WPA-PSK (1+2)
 Frequency range: 2400-2483.5 MHz
 Chipset: Ralink
 Plug & Play

Part.no. WL0043

Wireless LAN 150MBit Broadband Router

LogiLink



Wireless LAN Broadband Router with 4-Port Switch
 LAN: 802.3u
 Wireless LAN: 802.11n, 802.11g, 802.11b
 Ports: 1xRJ45 WAN, 4xRJ45 LAN
 Frequency range: 2.4GHz
 Supports: WMM, WPS, DHCP, Port Forwarding
 Wireless security: WEP, WPA-PSK, WPA2-PSK
 PPPoE, Static IP, PPTP, VPN Pass Through
 Access Point Function AP, Bridge, WDS, UR

Part.no. WL0052

Wireless LAN 300MBit Broadband Router 2T3R

LogiLink



Wireless LAN Broadband Router with 4-Port Switch
 IEEE 802.11n, 802.11g, 802.11b, 802.3u
 Compliance with 802.11n Draft 2.0 specification
 Wireless LAN: 300, 54, 22, 11, 5.5, 2, 1 Mbps
 Ports: 1xRJ45 WAN, 4xRJ45 LAN
 Frequency range: 2400-2483.5 MHz
 Supports: advanced MIMO technology
 Wireless security: WEP, WPA, WPA2, WPA-PSK (1+2)
 PPPoE, PPTP, DHCP, MAC
 Chipset: Ralink + Realtek

Part.no. WL0028A

Wireless LAN 300MBit Access Point 2T2R

LogiLink



Wireless LAN 300MBit Access Point
 IEEE 802.11n, 802.11b, 802.11g
 Wireless LAN 300, 54, 22, 11, 5.5, 2.0, 1.0 Mbps
 Ports: 1x RJ45 (LAN)
 Frequency range: 2400-2483.5 MHz
 LED for link activity, collision, speed
 Encryption: WEP, WPA, WPA2
 Supports: WDS, AP Client, point-to-point
 DHCP server, MAC access control, WPS

Part.no. WL0053

Wireless LAN 150MBit Projector Server 2T2R

LogiLink



CPU: Sigma Designs SMP8635
 Memory: 16MB Flash, 128MB DDR RAM
 LAN Port: 10/100M UTP Port x 1
 WLAN: 2T2R 80211n Mini PCI supports WPS 1
 USB: 2x USB 2.0, Audio Output
 Video Output: VGAx1, HDMIx1
 Resolution: VGA: 1920x1440, HDMI: 1080P
 Video Format Support: MPEG1/2/4, H.264
 Max. User: 16, Login Code Protection
 Remote control, Firmware upgradeable

Part.no. WL0063

Fast Ethernet Desktop Switch, 5-Port

LogiLink



Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Ports: 5x RJ45 + 1x Uplink port
LED for power, busy and collision
Store and Forward Architecture
Auto MDI / MDI-X Function

Part.no. NS0001B

Fast Ethernet Desktop Switch, 8-Port

LogiLink



Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Ports: 8x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto MDI / MDI-X Function

Part.no. NS0002B

Fast Ethernet Desktop Switch, 16-Port

LogiLink



Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Ports: 16x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto MDI / MDI-X Function

Part.no. NS0024

Fast Ethernet 19" Switch, 16-Port

LogiLink



Fast Ethernet 19" Switch
IEEE 802.3 and IEEE 802.3u
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Ports: 16x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto MDI / MDI-X, incl. Panel

Part.no. NS0029

Fast Ethernet 19" Switch, 24-Port

LogiLink



Fast Ethernet 19" Switch
IEEE 802.3 and IEEE 802.3u
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Ports: 24x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto MDI / MDI-X Function
19" Panel inclusive

Part.no. NS0025



Gigabit Desktop Switch, 5-Port

LogiLink



Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab compatible
Transfer rate: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Ports: 5x RJ45 ports
LED for power, busy and collision
Auto Speed Detection
Store and Forward Architecture
Auto MDI / MDI-X Function

Part.no. NS0030

Gigabit Desktop Switch, 8-Port

LogiLink



Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab compatible
Transfer rate: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Ports: 8x RJ45 ports
LED for power, busy and collision
Auto Speed Detection
Store and Forward Architecture
Auto MDI / MDI-X Function

Part.no. NS0031

Gigabit 19" Switch, 16-Port

LogiLink



Gigabit Switch for placement in 19 inch rack
IEEE802.3, 802.3u and 802.3ab compatible
Transfer rate: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Ports: 16x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto Midi Midi-X, incl. Panel

Part.no. NS0032

Gigabit 19" Switch, 24-Port

LogiLink




Gigabit Switch for placement in 19 inch rack
IEEE802.3, 802.3u and 802.3ab compatible
Transfer rate: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Ports: 24x RJ45
LED for power, busy and collision
Store and Forward Architecture
Auto Midi Midi-X, incl. Panel

Part.no. NS0033

Fast Ethernet PCI Card

LogiLink

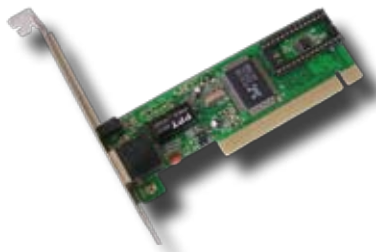


Fast Ethernet PCI Card
IEEE802.3, 802.3u, 802.3x
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Auto Speed Detection
32 Bit PCI Rev.2.2
Ports: 1x RJ45
Chipset: Realtek
LED for link, activity, error

Part.no. PC0039

Fast Ethernet PCI Card

LogiLink

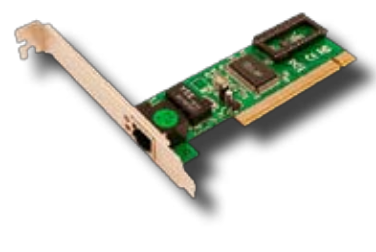

Fast Ethernet PCI Card
IEEE802.3, 802.3u, 802.3x
Transfer rate: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Auto Speed Detection
32 Bit PCI Rev.2.2
Ports: 1x RJ45
LED for link, activity, error

Part.no. PC0044



Fast Ethernet USB 2.0 to RJ45 Adapter

LogiLink



Fast Ethernet USB 2.0 to RJ45 Adapter
 Connector 1: USB A male
 Connector 2: RJ 45 female
 Ethernet: IEEE802.3, IEEE802.3u
 Transfer rate: 10/100 MBit
 Compliance with USB 2.0 standard specification
 Max. Data Rate: 480 Mbps
 LED for USB and network activity
 Auto Speed Detection

Part.no. UA0025C

Gigabit PCI Card

LogiLink



Gigabit PCI Card
 IEEE802.3, 802.3u, 802.3ab, 802.3x
 Transfer rate: 10/100/1000 MBit
 In Full Duplex Mode up to 20/200/2000 MBit
 Auto Speed Detection
 Connector: 1x RJ45
 32 Bit PCI Rev.2.2
 FIFO(8K/64K) buffers

Part.no. PC0012

Gigabit PCI Express Card

LogiLink



Gigabit PCI Express Card
 IEEE802.3, 802.3u, 802.3ab, 802.3x
 Transfer rate: 10/100/1000 MBit
 In Full Duplex Mode up to 20/200/2000 MBit
 Auto Speed Detection
 Connector: 1x RJ45
 FIFO(8K/64K) buffers
 LED for link, activity, error

Part.no. PC0029A

Gigabit PC Card

LogiLink



Gigabit PC Card
 IEEE802.3, 802.3u, 802.3ab, 802.3x
 Transfer rate: 10/100/1000 MBit
 In Full Duplex Mode up to 20/200/2000 MBit
 Auto Speed Detection
 Connector: 1x RJ45
 FIFO(8K/64K) buffers
 LED for link, activity, error

Part.no. PC0011

Gigabit Express Card

LogiLink



Gigabit Express Card
 IEEE 802.3,802.3ab,802.3u,802.1q
 Transfer rate: 10/100/1000 MBit
 In Full Duplex Mode up to 20/200/2000 MBit
 Auto Speed Detection
 Connector: 1x RJ45
 Express Card 34 mm standard
 Compatible to 1-Lane PCI-Express

Part.no. PC0035

DSL Broadband Router, 4-port Switch

LogiLink



Broadband Router with 4-Port Switch
 Supports: IEEE 802.3, IEEE 802.3u
 Transfer rate: 10/100 Mbit
 Connectors: 1x RJ45 (WAN), 4x RJ45 (LAN)
 Switch supports full-duplex, MDI, MDIX
 DHCP server, virtual server, DMZ host
 Static routing table, PPPoE, DHCP, ICMP, NAT
 Firmware upgrade, remote and web management
 Integrated Firewall with IP filter

Part.no. NR0004

Fast Ethernet Dual Mode Pan & Tilt IP Camera / MPEG4 + Motion JPEG

LogiLink



IP Camera for internet and network
LAN: 10/100 MBit, 1x UTP, SD Cardslot
Memory: 4MB Flash, 32MB SD RAM
Sensor: Micron MI-1320 1.3M Pixels CMOS
Compression: MPEG4, Motion-JPEG
Pan-, Tilt-, Zoom function
Chipset: Prolific PL-1029
Motion Detection, Manual Focus Lens, DDNS, UPnP
Send images by email or ftp
Software: Admin & Viewer up to 16 cameras

Part.no. WC0006



Wireless LAN 802.11n Dual Mode Pan & Tilt IP Camera / MPEG4 + Motion JPEG

LogiLink



Wireless LAN IP Camera for internet and network
LAN: 10/100 MBit, 1x UTP, SD Cardslot
Memory: 4MB Flash, 32MB SD RAM
Sensor: Micron MI-1320 1.3M pixels CMOS
Compression: MPEG4, Motion-JPEG
Pan-, Tilt-, Zoom function
Chipset: Prolific PL-1029, RL 802.11n
Motion Detection, Manual Focus Lens, DDNS, UPnP
Send images by email or ftp
Software: Admin & Viewer up to 16 cameras

Part.no. WC0007



Fast Ethernet IP Camera with Night Vision

LogiLink



Video access over internet and network
Sensor: CMOS
Connector: 10/100 MBit, 1x UTP
Audio: Onboard microphone
Resolution: 640x480, 320x240, 160x120
Frame rate: Max. 12fps(VGA), 25fps(CIF)
Intern Night Vision IR LED
Video: M-JPEG, Audio: ADPCM 8kbps
LED for power and network connection
Bracket inclusive

Part.no. WC0005



Fast Ethernet IP Camera, 640x480

LogiLink



Video access over internet and network
 Lens: Manual Focus, F=1.8
 LAN: 10/100 MBit, 1x UTP
 Chipset: Realtek RTL8650B + Topro
 2 MB Flash and 16 MB SD RAM
 Sensor: Micron MI-360, CMOS
 Access by browser with Active-X
 Color control, exposure, white balance
 Max. resolution: 640x480
 Frame rate: 30 frames per second (fps)

Part.no. WC0001B

Wireless LAN IP Camera, 640x480

LogiLink



Video access over internet and network
 Wireless LAN: 802.11g 54 MBit
 LAN: 10/100 MBit, 1x UTP
 Chipset: Realtek RTL8650B + Topro
 2 MB Flash and 16 MB SD RAM
 Sensor: Micron MI-360 CMOS
 Access with Active-X support
 Color control, exposure, white balance
 Max. resolution: 640x480
 Frame rate: 30 frames per second (fps)

Part.no. WC0002B

Fast Ethernet Pan & Tilt IP Camera

LogiLink



Video access over internet and network
 Lens: Manual Focus, F=1.8
 LAN: 10/100 MBit, 1x UTP
 Chipset: Realtek RTL8650B + Topro
 2 MB Flash and 16 MB SD RAM
 Sensor: Micron MI-360, CMOS
 Access by browser with Active-X
 Color control, exposure, white balance
 Max. resolution: 640x480
 Frame rate: 30 frames per second (fps)

Part.no. WC0003A

Wireless LAN Pan & Tilt IP Camera

LogiLink



Video access over internet and network
 Wireless LAN: 802.11g 54 MBit
 LAN: 10/100 MBit, 1x UTP
 Chipset: Realtek + Topro
 2 MB Flash and 16 MB SD RAM
 Sensor: Micron MI-360 CMOS
 Access with Active-X support
 Color control, exposure, white balance
 Max. resolution: 640x480
 Frame rate: 30 frames per second (fps)

Part.no. WC0004A

Fast Ethernet Printserver, 1x Parallel

LogiLink



Fast Ethernet Printserver Parallel
LAN connector: 10/100 MBit, RJ45
Printer: Centronics 36-Pin Male
Compliance with IEEE1284 standard
Supports: Auto-MDI/MDI-X
512 kb Flash and 2 MB SD RAM
Configuration via integrated menu
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0001

Wireless LAN Printserver, 1x Parallel

LogiLink



Wireless LAN Printserver Parallel
LAN connector: 10/100 MBit, RJ45
Wireless LAN: 812.11 b/g up to 54 Mbps
Printer: Centronics 36-Pin Male
Compliance with IEEE1284 standard
Supports: Auto-MDI/MDI-X
512 kb Flash and 2 MB SD RAM
Configuration via integrated menu
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0003

Fast Ethernet Printserver, 1x USB 2.0

LogiLink



Fast Ethernet Printserver USB 2.0
LAN connector: 10/100 MBit, RJ45
Connector: USB A connector
USB 2.0 specification standard
Supports: Auto-MDI/MDI-X
512 kb Flash and 2 MB SD RAM
Configuration via integrated menu
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0002

Wireless LAN Printserver, 1x USB 2.0

LogiLink



Wireless LAN Printserver USB 2.0
LAN connector: 10/100 MBit, RJ45
Wireless LAN: 812.11 b/g up to 54 Mbps
Connector: USB A connector
USB 2.0 specification standard
Supports: Auto-MDI/MDI-X
512 kb Flash and 2 MB SD RAM
Configuration via integrated menu
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0004A

Fast Ethernet MFP Server, 1x USB 2.0

LogiLink



Fast Ethernet multifunction Printserver for
Printer, Scanner, Fax, FTP
LAN connector: 10/100 MBit, RJ45
Connector: USB A connector
Auto-MDI/MDI-X
1 MB Flash and 8 MB SD RAM
Configuration via integrated menu
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0007

Wireless LAN MFP Server, 1x USB 2.0

LogiLink



Wireless LAN multifunction Printserver for
Printer, Scanner, Fax, FTP
LAN connector: 10/100 MBit, RJ45
Wireless LAN: 812.11 b/g up to 54 Mbps
Connector: USB A connector
Auto-MDI/MDI-X
1 MB Flash and 8 MB SD RAM
Supports: MAC addressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0005A

Fast Ethernet Printserver, 1x Parallel & 2x USB 2.0

LogiLink



Fast Ethernet Printserver 1x Parallel & 2x USB 2.0
 LAN connector: 10/100 MBit, RJ45
 Parallel connector: 1x DSUB 25-pin female
 USB connector: 2x USB A female
 Supports: Auto-MDI/MDI-X
 2 MB Flash and 16 MB SD RAM
 Configuration via integrated menu
 Supports: MAC addressing, LPR, RAW
 Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0006

Wireless LAN Printserver, 1x Parallel & 2x USB 2.0

LogiLink



Printserver 1x Parallel & 2x USB 2.0
 LAN connector: 10/100 MBit, RJ45
 Parallel connector: 1x DSUB 25-pin female
 USB connector: 2x USB A female
 Supports: Auto-MDI/MDI-X
 2 MB Flash and 16 MB SD RAM
 Configuration via integrated menu
 Supports: MAC addressing, LPR, RAW
 Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0008

Fast Ethernet Printserver with NAS Storage Server

LogiLink



Print server for the operation of printer or alternatively NAS Storage Server
 LAN connector: 10/100 MBit, RJ45
 USB 2.0 Connector: 2x USB A female
 Windows, FTP, HTTP and Apple File Sharing
 Auto-MDI/MDI-X
 4 MB Flash and 32 MB SD RAM
 Configuration via integrated menu
 Supports: MAC addressing, LPR, RAW
 Apple Talk, NetWare, SNMB, NetBeui

Part.no. PS0009

Wireless LAN Printserver with NAS Storage Server

LogiLink



Print server for the operation of printer or alternatively NAS Storage Server
 Wireless LAN: 812.11 b/g bis 54 Mbps
 LAN connector: 10/100 MBit, RJ45
 USB 2.0 Connector: 2x USB A female
 Windows, FTP, HTTP and Apple File Sharing
 Auto-MDI/MDI-X
 4 MB Flash and 32 MB SD RAM
 Configuration via integrated menu
 Supports: MAC addressing, LPR, RAW etc.

Part.no. PS0010



Homeplug Ethernet Adapter, 85MBit, Duo-Set

LogiLink



Network connection over power network
Power supply: each 220 volt, 50Hz
LAN connector: each 1x RJ45 LAN
Max. data transfer rate: 85 Mbps
Suitable for internet access or network
No cable installation and drilling necessary
Max. distance: 150 m
Transmission through rooms and floors
Secure 56 bit encryption

Part.no. PL0001

Homeplug Ethernet Adapter, 200 MBit, Duo-Set

LogiLink



Network connection over power network
Power supply: each 220 volt, 50Hz
LAN connector: each 1x RJ45 LAN
Max. data transfer rate: 200 Mbps
Suitable for internet access or network
No cable installation and drilling necessary
Max. distance: 150 m
Transmission through rooms and floors
Secure 56 bit encryption

Part.no. PL0002

Homeplug Ethernet Adapter, 85MBit

LogiLink



Exchangeable power plug for use in UK included. Further variants on request.

Network connection over power network
Power supply: 220 volt, 50Hz
LAN connector: each 1x RJ45 LAN
Max. data transfer rate: 85 Mbps
Suitable for internet access or network
No cable installation and drilling necessary
Max. distance: 150 m
Transmission through rooms and floors
Secure 56 bit encryption
Exchangeable power plug for use in UK

Part.no. PL0003

Homeplug Ethernet Adapter, 200MBit

LogiLink



Network connection over power network
Power supply: 220 volt, 50Hz
LAN connector: each 1x RJ45 LAN
Max. data transfer rate: 200 Mbps
Suitable for internet access or network
No cable installation and drilling necessary
Max. distance: 150 m
Transmission through rooms and floors
Secure 56 bit encryption

Part.no. PL0004

2direct No.	TP-Link No.	Description
300M Wireless N Router (3-Antenna 11n)		
WL0057	TL-WR941ND	Wireless N Router, Atheros, 3T3R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b, Built-in 4-port Switch
300M Wireless N Adapter (3-Antenna 11n)		
WL0058	TL-WN910N	Advanced wireless N Cardbus Adapter, Atheros, 2T3R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
WL0059	TL-WN951N	Wireless N PCI Adapter, Atheros, 3T3R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
WL0066	TL-WN961N	Advanced wireless N MiniPCI Adapter, Atheros, 3T3R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
300M Wireless N Router (2-Antenna)		
WL0050	TL-WR841N	Wireless N Router, Atheros, 2T2R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b, Built-in 4-port Switch
300M Wireless N Adapter (2-Antenna)		
WL0060	TL-WN811N	Wireless N Cardbus Adapter, Atheros, 2T2R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
WL0061	TL-WN821N	Wireless N USB Adapter, Atheros, 2T2R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
WL0062	TL-WN851N	Wireless N PCI Adapter, Atheros, 2T2R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
WL0065	TL-WN861N	Wireless N MiniPCI Adapter, Atheros, 2T2R, 2.4GHz, 802.11n Draft 2.0, 802.11g/b
108M Wireless Router (Super GTM & eXtended Range™)		
WL0012	TL-WR641G	108M Wireless Router with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
WL0013	TL-WR642G	108M Wireless Router with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
108M Wireless Access Point (Super GTM & eXtended Range™)		
WL0048	TL-WA601G	108M Wireless Access Point with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b,
108M Wireless Adapter (Super GTM & eXtended Range™)		
WL0014	TL-WN610G	108M Wireless CardBus Adapter with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b
WL0015	TL-WN620G	108M Wireless USB Adapter with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b
WL0016	TL-WN651G	108M Wireless PCI Adapter with eXtended Range™ and Super GTM, Atheros, 2.4GHz, 802.11g/b, detachable antenna
WL0032	TL-WN660G	108M Wireless mini PCI Adapter with eXtended Range™ and Super GTM, Atheros, 2.4GHz,
54M Wireless Router (eXtended Range™)		
WL0007	TL-WR541G	54M Wireless Router with eXtended Range™, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
WL0008	TL-WR542G	54M Wireless Router with eXtended Range™, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
WL0045	TL-WR543G	54M Wireless AP Client Router with eXtended Range™, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
54M Wireless Access Point (eXtended Range™)		
WL0024	TL-WA501G	54M Wireless Access Point with eXtended Range™, Atheros, 2.4GHz, 802.11g/b
54M Wireless Adapter (eXtended Range™)		
WL0009	TL-WN510G	54M Wireless CardBus Adapter with eXtended Range™, Atheros, 2.4GHz, 802.11g/b
WL0010	TL-WN551G	
WL0067	TL-WN560G	54M Wireless mini PCI Adapter with eXtended Range™, Atheros, 2.4GHz, 802.11g/b
54M Wireless Router		
WL0068	TL-WR340GD	54M Wireless Router, Atheros, 2.4GHz, 802.11g/b, Built-in 4-port Switch
54M Wireless Adapter		
WL0069	TL-WN310G	54M Wireless CardBus Adapter, Atheros chipset, 2.4GHz, 802.11g/b
WL0041	TL-WN353G	54M Wireless PCI Adapter, Realtek chipset, 2.4GHz, 802.11g/b, fixed antenna
WL0070	TL-WN353GD	54M Wireless PCI Adapter, Realtek chipset, 2.4GHz, 802.11g/b, detachable antenna
WL0011	TL-WN321G	54M Wireless USB Adapter, Ralink chipset, 2.4GHz, 802.11g/b
WL0071	TL-WN322G	54M Wireless USB Adapter, Zydax chipset, Simulated AP mode
High-Gain Wireless Adapter		
WL0072	TL-WN422G	54M High-Gain Wireless USB Adapter, Atheros chipset, 2.4GHz, 802.11g/b
Wireless Antenna		
WL0017	TL-ANT2405C	2.4GHz 5dBi Indoor Omni-directional antenna
WL0018	TL-ANT2406A	2.4GHz 6dBi Indoor Desktop Yagi-directional antenna
WL0019	TL-ANT2409A	2.4GHz 9dBi Outdoor Yagi-directional antenna
WL0073	TL-ANT2409B	2.4GHz 9dBi Outdoor Yagi-directional antenna, Cable length=1m, N-type connector
WL0034	TL-ANT2414A	2.4GHz 14dBi Outdoor Yagi-directional antenna
WL0074	TL-ANT2414B	2.4GHz 14dBi Outdoor Yagi-directional antenna, Cable length=1m, N-type connector
WL0046	TL-ANT24EC3S	Antenna Extension Cable, 2.4GHz, 3 meters cable length, Reverse SMA Male to Female connector
WL0047	TL-ANT24EC5S	Antenna Extension Cable, 2.4GHz, Outdoor, Cable length=5m, Reverse SMA Male to Female connector
WL0075	TL-ANT24EC6N	Low-loss Antenna Extension Cable, 2.4GHz, 6 meters cable length, N-type Male to Female connector
WL0076	TL-ANT24EC12N	Low-loss Antenna Extension Cable, 2.4GHz, 12 meters cable length, N-type Male to Female connector
WL0077	TL-ANT24PT	Pigtail Cable, 2.4GHz, 250mm Cable length, N-type Male to Reverse SMA Male connector
WL0078	TL-ANT24SP	Surge Protector, 2.4GHz, N-type Male to Female connector



2direct No.	TP-Link No.	Description
Powerline		
PL0005	TL-PA101	85Mbps Powerline Ethernet Adapter, Plug (EU/UK/AU), Homeplug Turbo
PL0006	TL-PA201	200Mbps Powerline Ethernet Adapter, Plug (EU/UK/AU), Homeplug AV
ADSL2+ Router		
NR0005	TD-8840B	4 ethernet ports ADSL2+ router with bridge and NAT router, ADSL/ADSL2/ADSL2+, Annex B
NR0006	TD-8841	4 ethernet ports and 1 USB port ADSL2+ router with bridge and NAT router, ADSL/ADSL2/ADSL2+, Annex A
NR0009	TD-W8910GB	54M Wireless ADSL2+ router, Atheros + Broadcom chipset, ADSL/ADSL2/ADSL2+, Annex B
NR0007	TD-W8910G	54M Wireless ADSL2+ router, eXtended RangeTM, Atheros + Broadcom, ADSL/ADSL2/ADSL2+, Annex A
NR0008	TD-W8920G	108M Wireless ADSL2+ router, eXtended RangeTM, Atheros + Broadcom, ADSL/ADSL2/ADSL2+, Annex A
NR0010	TD-W8920GB	108M Wireless ADSL2+ router, eXtended RangeTM, Atheros + Broadcom, ADSL/ADSL2/ADSL2+, Annex B
SOHO Broadband Router		
NR0001	TL-R402M	1 WAN port + 4 LAN ports, Cable/DSL Router for Home, Dial-on-demand, Firewall, DHCP, DMZ host, VPN pass-through
NR0002	TL-R460	1 WAN port + 4 LAN ports, Cable/DSL Router for Home and Small Office, Dial-on-demand, Advanced firewall, Parental control
NR0003	TL-R860	1 WAN port + 8 LAN ports, Cable/DSL Router for Small Office, Dial-on-demand, Advanced firewall
Print Server		
PS0012	TL-PS110P	Single parallel port fast ethernet print server
PS0013	TL-PS110U	Single USB2.0 port fast ethernet print server
PS0014	TL-PS210U	Single USB2.0 port MFP print server
PS0015	TL-WPS510U	Wireless Print Server, single USB2.0
Managed Pure-Gigabit Switch		
NS0041	TL-SG3109	9-port Pure-Gigabit Managed Switch, 8 10/100/1000M RJ45 ports, 1 SFP
Managed Gigabit-Uplink Switch		
NS0042	TL-SL3428	24+4G Gigabit-Uplink Managed Switch, 24 10/100M RJ45 ports, 2 10/100/1000M RJ45 ports, 2 SFP
NS0043	TL-SL3452	48+4G Gigabit-Uplink Managed Switch, 48 10/100M RJ45 ports, 2 10/100/1000M RJ45 ports, 2 SFP
Web Smart Pure-Gigabit Switch		
NS0026	TL-SG2109WEB	9-port Pure-Gigabit Web Smart Switch, 8 10/100/1000M RJ45 ports, 1 SFP
NS0027	TL-SG2216WEB	16-port Pure-Gigabit Web Smart Switch, 16 10/100/1000M RJ45 ports, 2 SFP
NS0028	TL-SG2224WEB	24-port Pure-Gigabit Web Smart Switch, 24 10/100/1000M RJ45 ports, 2 SFP
Web Smart Gigabit-Uplink Switch		
NS0045	TL-SL2210WEB	8+2G Gigabit-Uplink Web Smart Switch, 8 10/100M RJ45 ports, 1 10/100/1000M RJ45 ports, 1 SFP
NS0046	TL-SL2218WEB	16+2G Gigabit-Uplink Web Smart Switch, 16 10/100M RJ45 ports, 1 10/100/1000M RJ45 ports, 1 SFP
NS0047	TL-SL2428WEB	24+4G Gigabit-Uplink Web Smart Switch, 24 10/100M RJ45 ports, 2 10/100/1000M RJ45 ports, 2 SFP
NS0048	TL-SL2452WEB	48+4G Gigabit-Uplink Web Smart Switch, 48 10/100M RJ45 ports, 2 10/100/1000M RJ45 ports, 2 SFP
Unmanaged Pure-Gigabit Switch		
NS0004	TL-SG1005D	5-port Gigabit Switch, 5 10/100/1000M RJ45 ports, plastic case
NS0005	TL-SG1008D	8-port Gigabit Switch, 8 10/100/1000M RJ45 ports, plastic case
NS0022	TL-SG1016	16-port Gigabit Switch, 16 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
NS0023	TL-SG1024	24-port Gigabit Switch, 24 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
NS0049	TL-SG1048	48-port Gigabit Switch, 48 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
Unmanaged Gigabit-Uplink Switch		
NS0038	TL-SL1109	8+1G Gigabit Switch, 8 10/100M RJ45 ports, 1 Fixed 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
NS0039	TL-SL1117	16+1G Gigabit Switch, 16 10/100M RJ45 ports, 1 Fixed 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
NS0040	TL-SL1226	24+2G Gigabit Switch, 24 10/100M RJ45 ports, 2 Fixed 10/100/1000M RJ45 ports, 1U 19-inch rack-mountable steel case
Unmanaged 10/100M Switch		
NS0006	TL-SF1005D	5-port 10/100M mini Desktop Switch, 5 10/100M RJ45 ports, Plastic case
NS0007	TL-SF1008D	8-port 10/100M mini Desktop Switch, 8 10/100M RJ45 ports, Plastic case
NS0008	TL-SF1016D	16-port 10/100M Desktop Switch, 16 10/100M RJ45 ports, Plastic case
NS0034	TL-SF1016	16-port 10/100M Switch, 16 10/100M RJ45 ports, 1U 13-inch rack-mountable steel case
NS0009	TL-SF1024	24-port 10/100M Switch, 24 10/100M RJ45 ports, 1U 19-inch rack-mountable steel case
NS0035	TL-SF1048	48-port 10/100M Switch, 48 10/100M RJ45 ports, 1U 19-inch rack-mountable steel case
SFP Fiber Module (MiniGBIC)		
NS0036	TL-SM311LM	Gigabit SFP module, Multi-mode, MiniGBIC, LC interface, Up to 550/275m distance
NS0037	TL-SM311LS	Gigabit SFP module, Single-mode, MiniGBIC, LC interface, Up to 10km distance
Network Interface Card		
PC0045	TG-5269	32bit Gigabit CardBus Network Interface Card, RealTek RTL8169SC chipset, 10/100/1000Mbps
PC0019	TG-3269	32bit Gigabit PCI Network Interface Card, RealTek RTL8169SC chipset, 10/100/1000Mbps
PC0021	TF-3239DL	10/100M PCI Network Interface Card, Realtek RTL8139D chip
PC0022	TF-5239	10/100M 32bit CardBus Network Interface Card, RJ45 port

TP-LINK
The Reliable Choice



CAT5e Surface Modular Outlet, RAL 9010



Modular Wallplate, CAT5e
 On wall and in wall ready
 Compliance with CAT5e standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0028

CAT5e Surface Modular Outlet, RAL 9003



Modular Wallplate, CAT5e
 On wall and in wall ready
 Compliance with CAT5e standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0035

CAT5e Flush Mount Box, RAL 9010



Modular Wallplate, CAT5e
 In wall ready
 Compliance with CAT5e standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0028U

CAT6 Surface Modular Outlet, RAL 9010



Modular Wallplate, CAT6
 On wall and in wall ready
 Compliance with CAT6 standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0006

CAT6 Surface Modular Outlet, RAL 9003



Modular Wallplate, CAT6
 On wall and in wall ready
 Compliance with CAT6 standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0039

CAT6 Flush Mount Box, RAL 9010



Modular Wallplate, CAT6
 In wall ready
 Compliance with CAT6 standard
 Shielding from enclosed metal die cast housing
 2x RJ45 8P8C sockets, fully shielded
 Integrated strain relief
 2 port 40° angled outlet
 Color coded according to EIA/TIA 568 A&B
 Includes label field

Part.no. NP0006U

CAT5e Patch Panel 8-Port shielded, RAL 7035



CAT5e Patch Panel, 8-Port, shielded
 Desktop version
 Compliance with CAT5e standard
 8x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color gray RAL 7035

Part.no. NP0038

CAT5e Patch Panel 10" 12-Port shielded, RAL 7035



CAT5e Patch Panel 12-Port, shielded
 For placement in 10 inch rack
 Compliance with CAT5e standard
 12x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color gray RAL 7035

Part.no. NP0037

CAT5e Patch Panel 19" 24-Port shielded, RAL 7035



CAT5e Patch Panel, 24-Port, shielded
 For placement in 19 inch rack
 Compliance with CAT5e standard
 24x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color gray RAL 7035

Part.no. NP0036

CAT5e Patch Panel 19" 24-Port unshielded, RAL 9005



CAT5e Patch Panel, 24-Port, unshielded
 For placement in 19 inch rack
 Compliance with CAT5e standard
 24x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color black RAL 9005
 Pin: 6µ gold-plated

Part.no. NP0027

CAT5e Patch Panel 19" 24-Port unshielded, RAL 9005



CAT5e Patch Panel, 24-Port, unshielded
 For placement in 19 inch rack
 Compliance with CAT5e standard
 24x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color black RAL 9005
 Pin: 50µ gold-plated

Part.no. NP0005

CAT6 Patch Panel 8-Port shielded, RAL 9005



CAT6 Patch Panel, 8-Port, shielded
 Desktop version
 Compliance with CAT6 standard
 8x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color black RAL 9005

Part.no. NP0016

CAT6 Patch Panel 19" 24-Port shielded, RAL 7035



CAT6 Patch Panel, 24-Port, shielded
 For placement in 19 inch rack
 Compliance with CAT6 standard
 24x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color gray RAL 7035

Part.no. NP0040

CAT6 Patch Panel 19" 24-Port unshielded, RAL 9005



CAT6 Patch Panel, 24-Port, unshielded
 For placement in 19 inch rack
 Compliance with CAT6 standard
 24x RJ45 sockets
 Cable installation via LSA stripes
 Color coded according to EIA/TIA 568 A&B
 Integrated strain relief
 Ground cable installation settlement
 Color black RAL 9005

Part.no. NP0004

CAT5e LSA Connection box, metal housing



Connection box for use with CAT5 cables
 Module for extending raw cables
 Cable installation via LSA stripes
 Solder-, screw- and strip- free connectors
 Fitting up to AWG 26-22
 Screening: Screened
 Separate strain relief
 Integrated strain relief
 Housing: Metal
 Includes: Mounting kit

Part.no. NP0014

CAT5e LSA Connection box, metalized housing



Connection box for use with CAT5 cables
 Module for extending raw cables
 Cable installation via LSA stripes
 Solder-, screw- and strip- free connectors
 Fitting up to AWG 26-22
 Screening: Screened
 Separate strain relief
 Integrated strain relief
 Housing: Metalized plastic
 Includes: Mounting kit

Part.no. NP0014A


CAT6 LSA Connection box, metal housing



Connection box for use with CAT6 cables
 Module for extending raw cables
 Cable installation via LSA stripes
 Solder-, screw- and strip- free connectors
 Fitting up to AWG 26-22
 Screening: Screened
 Separate strain relief
 Integrated strain relief
 Housing: Metal
 Includes: Mounting kit

Part.no. NP0012

CAT6 LSA Connection box, metalized housing



Connection box for use with CAT6 cables
 Module for extending raw cables
 Cable installation via LSA stripes
 Solder-, screw- and strip- free connectors
 Fitting up to AWG 26-22
 Screening: Screened
 Separate strain relief
 Integrated strain relief
 Housing: Metalized plastic
 Includes: Mounting kit

Part.no. NP0012A

CAT5e Modular Coupling, 1:1



Modular coupling for network cables
Adapter also suitable for ISDN cables
2x RJ45 shielded sockets
Allocation: 1:1
Compliance with CAT5e standard
Metal housing

Part.no. NP0031

CAT5e Modular Coupling, 1:1



Modular coupling for network cables
Adapter also suitable for ISDN cables
2x RJ45 shielded sockets
Allocation: 1:1
Compliance with CAT5e standard
Metalized housing

Part.no. NP0029

CAT5e Modular Coupling, Crossover



Modular coupling for network cables
Adapter also suitable for ISDN cables
2x RJ45 shielded sockets
Allocation 1-3;2-6;3-1; 4-4;5-5;6-2;7-7;8-8
Compliance with CAT5e standard
Metalized housing

Part.no. NP0030

CAT6 Modular Coupling, 1:1



Modular coupling for network cables
Adapter also suitable for ISDN cables
2x RJ45 shielded sockets
Allocation: 1:1
Compliance with CAT6 standard
Metal housing

Part.no. NP0034

CAT5e Modular Plug, shielded



CAT5e modular plug
Suitable for 8P8C round cables
Shielded plug
Gold-plated contacts

Part.no. MP0003

CAT5e Modular Plug, shielded with threading relief



CAT5e modular plug
Suitable for 8P8C round cables
Shielded plug
Gold-plated contacts
Incl. threading relief

Part.no. MP0004

CAT5e Modular Plug, unshielded



CAT5e modular plug
Suitable for 8P8C round cables
Unshielded plug
Gold-plated contacts

Part.no. MP0002

Bend Relief for Modular Plugs



Bend relief for 8P8C modular plugs
Suitable with shielded and unshielded plugs
MP0005 = Color gray
MP0006 = Color black
MP0007 = Color green
MP0008 = Color blue
MP0009 = Color yellow
MP0010 = Color red

Part.no. MP0005 - MP0010



Packed CAT5e & CAT6 Patch cable

CAT5e Patch cable, UTP, gray, 0.25 m	Part.no.	CP0231
CAT5e Patch cable, UTP, gray, 0.50 m	Part.no.	CP0120
CAT5e Patch cable, UTP, gray, 1 m	Part.no.	CP0003
CAT5e Patch cable, UTP, gray, 2 m	Part.no.	CP0004
CAT5e Patch cable, UTP, gray, 3 m	Part.no.	CP0005
CAT5e Patch cable, UTP, gray, 5 m	Part.no.	CP0006
CAT5e Patch cable, UTP, gray, 10 m	Part.no.	CP0007
CAT5e Patch cable, UTP, gray, 15 m	Part.no.	CP0090
CAT5e Patch cable, UTP, gray, 20 m	Part.no.	CP0091
CAT5e Patch cable, UTP, gray, 30 m	Part.no.	CP0092

CAT5e Patch cable, FTP, gray, 0.25 m	Part.no.	CP0229
CAT5e Patch cable, FTP, gray, 0.50 m	Part.no.	CP0078
CAT5e Patch cable, FTP, gray, 1 m	Part.no.	CP0008
CAT5e Patch cable, FTP, gray, 2 m	Part.no.	CP0009
CAT5e Patch cable, FTP, gray, 3 m	Part.no.	CP0010
CAT5e Patch cable, FTP, gray, 5 m	Part.no.	CP0011
CAT5e Patch cable, FTP, gray, 10 m	Part.no.	CP0012
CAT5e Patch cable, FTP, gray, 15 m	Part.no.	CP0102
CAT5e Patch cable, FTP, gray, 20 m	Part.no.	CP0103
CAT5e Patch cable, FTP, gray, 30 m	Part.no.	CP0104
CAT5e Patch cable, FTP, gray, 50 m	Part.no.	CP0105
CAT5e Patch cable, FTP, gray, 100 m	Part.no.	CP0124

CAT5e Patch cable, SFTP, gray, 0.25 m	Part.no.	CP0230
CAT5e Patch cable, SFTP, gray, 0.50 m	Part.no.	CP0083
CAT5e Patch cable, SFTP, gray, 1 m	Part.no.	CP0013
CAT5e Patch cable, SFTP, gray, 2 m	Part.no.	CP0014
CAT5e Patch cable, SFTP, gray, 3 m	Part.no.	CP0015
CAT5e Patch cable, SFTP, gray, 5 m	Part.no.	CP0016
CAT5e Patch cable, SFTP, gray, 10 m	Part.no.	CP0017
CAT5e Patch cable, SFTP, gray, 15 m	Part.no.	CP0106
CAT5e Patch cable, SFTP, gray, 20 m	Part.no.	CP0107
CAT5e Patch cable, SFTP, gray, 30 m	Part.no.	CP0108
CAT5e Patch cable, SFTP, gray, 50 m	Part.no.	CP0109

CAT6 Patch cable, UTP, gray, 0.50 m	Part.no.	CP0224
CAT6 Patch cable, UTP, gray, 1 m	Part.no.	CP0225
CAT6 Patch cable, UTP, gray, 2 m	Part.no.	CP0226
CAT6 Patch cable, UTP, gray, 3 m	Part.no.	CP0239
CAT6 Patch cable, UTP, gray, 5 m	Part.no.	CP0227
CAT6 Patch cable, UTP, gray, 10 m	Part.no.	CP0240
CAT6 Patch cable, UTP, gray, 15 m	Part.no.	CP0241
CAT6 Patch cable, UTP, gray, 20 m	Part.no.	CP0242
CAT6 Patch cable, UTP, gray, 30 m	Part.no.	CP0243

CAT6 Patch cable, PIMF, gray, 0.50 m	Part.no.	CP0093
CAT6 Patch cable, PIMF, gray, 1 m	Part.no.	CP0094
CAT6 Patch cable, PIMF, gray, 2 m	Part.no.	CP0095
CAT6 Patch cable, PIMF, gray, 3 m	Part.no.	CP0096
CAT6 Patch cable, PIMF, gray, 5 m	Part.no.	CP0097
CAT6 Patch cable, PIMF, gray, 10 m	Part.no.	CP0098
CAT6 Patch cable, PIMF, gray, 15 m	Part.no.	CP0099
CAT6 Patch cable, PIMF, gray, 20 m	Part.no.	CP0100
CAT6 Patch cable, PIMF, gray, 30 m	Part.no.	CP0101


CAT5e UTP
Unshielded patch cable
4 x 2 AWG24/7, Twisted Pair,
100 Ohm 2x RJ 45 shielded
connectors, gold-plated
contacts, boot with kink pro-
tection and strain relief

CAT5e FTP
Foil shielded patch cable
4 x 2 AWG26/7, Twisted Pair,
100 Ohm 2x RJ 45 shielded
connectors, gold-plated
contacts, boot with kink pro-
tection and strain relief

CAT5e SFTP
Foil and braid shielded patch
cable
4 x 2 AWG26/7, Twisted Pair,
100 Ohm 2x RJ 45 shielded
connectors, gold-plated
contacts, boot with kink pro-
tection and strain relief

CAT6 UTP
Unshielded patch cable
4 x 2 AWG24/7, Twisted Pair,
100 Ohm 2x RJ 45 connec-
tors, gold-plated contacts,
boot with kink protection and
strain relief


CAT6 PIMF
PIMF (Pairs in metal foil)
patch cable
4 x 2 AWG26/7, Twisted Pair,
100 Ohm 2x RJ 45 shielded
connectors, gold-plated
contacts, boot with kink pro-
tection and strain relief

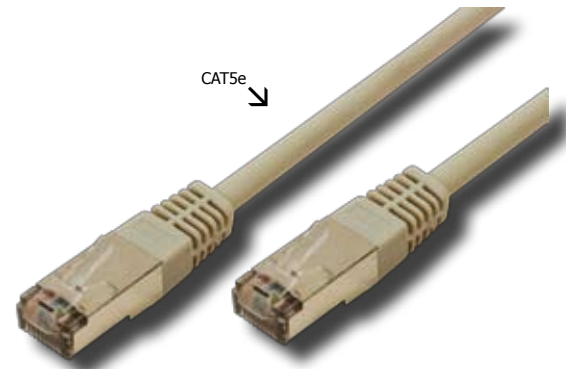


Shielded connectors with gold-plated contacts



Boots with kink protection and strain relief

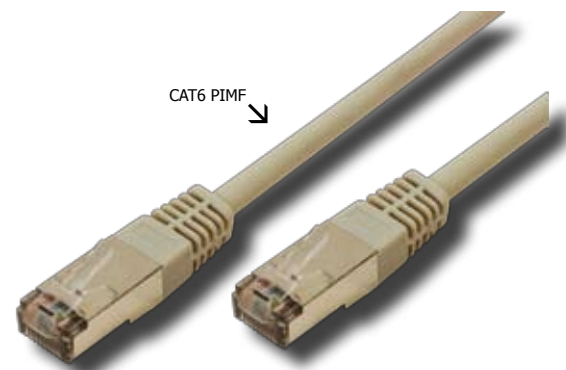

CAT5e & CAT6 Raw cable

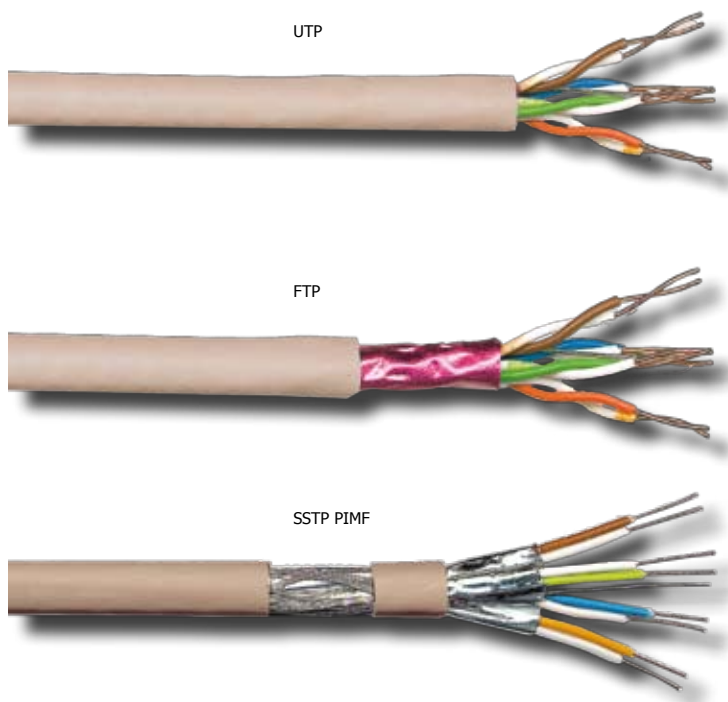

CAT5e UTP Raw cable
 Unshielded
 4 x 2 AWG24/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT5e Raw cable, UTP, 100 m	Part.no. CPV0019
CAT5e Raw cable, UTP, 305 m	Part.no. CPV0020

CAT5e FTP Raw cable
 Foil shielded
 4 x 2 AWG24/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT5e Raw cable, FTP, 50 m	Part.no. CPV0029
CAT5e Raw cable, FTP, 100 m	Part.no. CPV001
CAT5e Raw cable, FTP, 305 m	Part.no. CPV003

CAT5e SFTP Raw cable
 Foil and braid shielded
 4 x 2 AWG24/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT5e Raw cable, SFTP, 50 m	Part.no. CPV0030
CAT5e Raw cable, SFTP, 100 m	Part.no. CPV007
CAT5e Raw cable, SFTP, 305 m	Part.no. CPV009

CAT6 UTP Raw cable
 Unshielded
 4 x 2 AWG26/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801


CAT6 Raw cable, UTP, 100 m	Part.no. CPV0023
CAT6 Raw cable, UTP, 305 m	Part.no. CPV0024

CAT6 SFTP Raw cable
 LSOH
 Foil and braid shielded
 PIMF4 x 2 AWG23/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT6 Raw cable,SSTP, 100 m, LSOH	Part.no. CPV0025
CAT6 Raw cable,SSTP, 305 m, LSOH	Part.no. CPV0026

Patch cable, Cat 5e & Cat 6

LogiLink

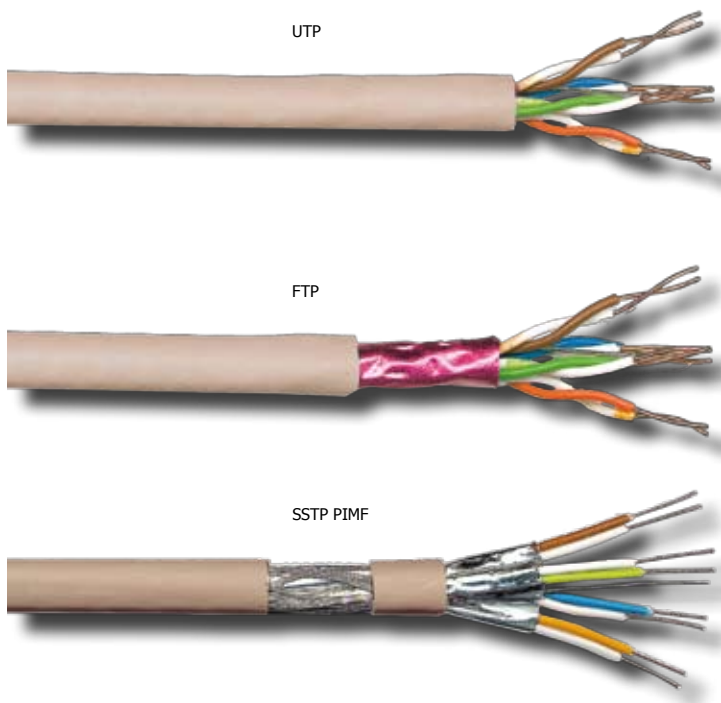

CAT5e Patch cable, UTP, 100 m
 CAT5e Patch cable, UTP, 305 m

Part.no. CPV0014
 Part.no. CPV0015

CAT5e UTP Patch cable
 Unshielded
 4 x 2 AWG26/7, Twisted Pair
 According to the Standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT5e Patch cable, FTP, 100 m
 CAT5e Patch cable, FTP, 305 m

Part.no. CPV0013
 Part.no. CPV0016

CAT5e FTP Patch cable
 Foil shielded
 4 x 2 AWG26/7, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT5e Patch cable, SFTP, 100 m
 CAT5e Patch cable, SFTP, 305 m

Part.no. CPV0017
 Part.no. CPV0018

CAT5e SFTP Patch cable
 Foil and braid shielded
 4 x 2 AWG26/7, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT6 Patch cable, UTP, 100 m
 CAT6 Patch cable, UTP, 305 m

Part.no. CPV0021
 Part.no. CPV0022

CAT6 UTP Patch cable
 Unshielded
 4 x 2 AWG26/7, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

CAT6 Patch cable, SFTP, 100 m, LSOH
 CAT6 Patch cable, SFTP, 305 m, LSOH

Part.no. CPV0027
 Part.no. CPV0028

CAT6 SFTP Patch cable LSOH
 Foil and braid shielded
 PIMF 4 x 2 AWG26/1, Twisted Pair
 According to the standards: EIA/TIA 568 B.2,
 EN 50173-1, ISO/IEC 11801

LSA Punch Down Tool

LogiLink



LSA Punch Down Tool
Suitable for on-wall and in-wall wallplates
Cutting of the extending cable end in one step
According to the standard EIA/TIA 568 B
For Network, DSL and ISDN
Easy to use

Part.no. WZ0001A

Multi Modular Crimping Tool

LogiLink



WZ0003

Multifunctional Modular Tool
for crimping cables for network and telephone
Smooth-running cable cutter
Easy cable stripping
Crimping tool for 8P8C-RJ45, 6P6C-RJ12
6P4C-RJ11, 4P4C, 4P2C, DEC
shielded 8P8C-RJ45 Modular Plugs
Blade cover lever action

Part.no. WZ0003 / HQ metal

Part.no. WZ0009 / Plastic

Crimping Tool Hirose 8P8C Metal

LogiLink



Modular Tool for Hirose plugs
for crimping cables for network and telephone
Smooth-running cable cutter
Easy cable stripping
Crimping tool suitable for 8P8C Hirose plugs
Blade cover lever action
Rubbered, non-slip plastic handles
Tool made of high-grade metal

Part.no. WZ0013

Modular Crimping Tool 8P8C

LogiLink



Modular Crimping Tool
Suitable for 8P8C RJ45 plugs
Smooth-running cable cutter
Easy cable stripping
Blade cover
Easy to use
Rubbered, non-slip plastic handles
Tool made of high-grade metal

Part.no. WZ0004

Stripper Tool

LogiLink



Universal Cable Stripping Tool
Suitable for patch- and raw cables
Blade cover
Tool made of high-quality plastic
Integrated cable cutter

Part.no. WZ0005

Cable Puller

LogiLink



Cable puller
Suitable for Power-, Network-, Telephone cables
Simplified installation even in complex cable shafts
and difficult environment
Suitable for straight and curved cable ducts
Roll up mechanism for the guide wire
Fixing system for cable end
Practical carrying handle, fixed locking device
Material: hardened metal, plastic drum

Part.no. WZ0006 / 15 m length

Part.no. WZ0007 / 30 m length

Part.no. WZ0008 / 60 m length

Cable Tester for RJ11 & RJ12 & RJ45

LogiLink



Cable Tester for RJ11, RJ12 & RJ45
Master & remote unit
Suitable for all types of patch cables
Various LEDs for status:
Loop-Back: localization of laid network cables
Continuity: of network or communication cables
Open: disconnected single wires
Shorts: short circuited single wires
Miss-Wire: identification of non conform wire assignment
Powered by 1x 9 Volt block battery (not included)

Part.no. WZ0010

Cable Tester for RJ45 & BNC

LogiLink



Cable Tester for RJ11/RJ12/RJ45 & BNC
Master & remote unit
Suitable for Patch- and BNC cables
Various LEDs for status:
Loop-Back: localization of laid network cables
Continuity: of network or communication cables
Open: disconnected single wires
Shorts: short circuited single wires
Miss-Wire: identification of non conform wire assignment
Powered by 1x 9 Volt block battery (not included)

Part.no. WZ0011

Cable tie set



High-quality cable ties
German Industrial Standard
UL checked
Flame-proof according to UL94V-2
Strain relief up to 50 kg
Packaging unit 100 pieces

Part.no. KAB0001 / 100 x 2.5 mm

Part.no. KAB0002 / 130 x 2.6 mm

Part.no. KAB0003 / 200 x 2.6 mm

Part.no. KAB0004 / 290 x 3.6 mm

HDMI Mini Video Switch, 3-Port

LogiLink.



HDMI

HDMI Switch with amplifier
 In: 3x HDMI connector
 Out: 1x HDMI connector
 VGA resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 2.5Gbps / 250MHz
 Vertical frequency: 60 Hz
 Specification: HDMI1.3 + HDCP1.0/1.1
 IR-Adapter + Remote control included

Part.no. HD0003

HDMI Video Switch, 3-Port

LogiLink.



HDMI

HDMI Switch with amplifier
 In: 3x HDMI connector
 Out: 1x HDMI connector
 VGA resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 2.5Gbps / 250MHz
 Vertical frequency: 60 Hz
 Specification: HDMI1.3 + HDCP1.0/1.1
 Power supply + Remote control included

Part.no. HD0001

HDMI Video Splitter, 4-Port

LogiLink.



HDMI

HDMI Splitter with amplifier
 In: 1x HDMI connector
 Out: 4x HDMI connector
 VGA resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 1.65Gbps / 165MHz
 Vertical frequency: 60 Hz
 Specification: HDMI 1.2+ HDCP 1.0/1.1
 Power supply included

Part.no. HD0002

HDMI Extender

LogiLink.



HDMI

Extends the HDMI signal up to 40m
 In: 1x HDMI connector
 Out: 1x HDMI connector
 VGA resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 1.65Gbps / 165MHz
 Vertical frequency: 60 Hz
 Specification: HDMI 1.2+ HDCP 1.0/1.1
 4 Repeater cascable up to 145 m

Part.no. HD0101

HDMI Extender over CAT5 cable

LogiLink.



HDMI

Extends the HDMI Signal up to 50 m over CAT5 cable
 In: 1x HDMI connector
 Out: 2x RJ45 connector
 Supports HDMI and DVI Input
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 2.25 Gbits x 3
 Specification: HDMI1.3
 Power supply included

Part.no. HD0102

HDMI High Quality Cable 1.3b

LogiLink.



HDMI

High Quality HDMI Connection Cable
 HDMI 19-pin male to HDMI 19-pin male
 Gold-plated contacts
 Transmission of audio and video data
 Supports HDMI 1.3b and also 480i, 480p, 720p, 1080i, 1080p
 Cable Gauge: AWG 28
 Cable packed in high quality blister

Part.no. CH0011 / 2 m

Part.no. CH0014 / 3 m

HDMI Adapter

LogiLink.



HDMI

HDMI Adapter
 HDMI 19-pin male to HDMI 19-pin connector
 Gold-plated contacts
 Transmission of audio and video data
 Supports HDMI 1.3b and also 480i, 480p, 720p, 1080i, 1080

Part.no. AH0005 / 90° angled

Part.no. AH0006

USB 2.0 Bluetooth Micro Adapter Class 1

LogiLink



Micro USB 2.0 Bluetooth Adapter, Class 1
Bluetooth V2.0, compatible to V1.2, V1.1
Chipset: CSR
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer-Speed: 3 Mbps
Max. distance: 100 m
Connector: USB 2.0 (USB 1.1 compatible)
IVT Software included
Suitable for Windows 2000/XP/Vista

Part.no. BT0009

USB 2.0 Bluetooth Micro Adapter Class 2

LogiLink



Micro USB 2.0 Bluetooth Adapter, Class 2
Bluetooth V2.0, compatible to V1.2, V1.1
Chipset: CSR
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer-Speed: 3 Mbps
Max. distance: 20 m
Connector: USB 2.0 (USB 1.1 compatible)
IVT Software included
Suitable for Windows 2000/XP/Vista

Part.no. BT0007

USB 2.0 Bluetooth Mini Adapter Class 2

LogiLink



Mini USB 2.0 Bluetooth Adapter, Class 2
Bluetooth V2.0, compatible to V1.2, V1.1
Chipset: Broadcom
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer-Speed: 3 Mbps
Max. distance: 50 m
Connector: USB 2.0 (USB 1.1 compatible)
IVT Software included
Suitable for Windows 2000/XP/Vista

Part.no. BT0006

USB 2.0 Bluetooth Adapter Class 2

LogiLink



USB 2.0 Bluetooth Adapter, Class 2
Bluetooth V2.0, compatible to V1.2, V1.1
Chipset: CSR
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer-Speed: 3 Mbps
Max. distance: 50 m
Protection cap
Toshiba Software included
Connector: USB 2.0 (USB 1.1 compatible)
Suitable for Windows 2000/XP/Vista

Part.no. BT0002

USB 2.0 Bluetooth Adapter Class 2

LogiLink



USB 2.0 Bluetooth Adapter, Class 2
Bluetooth V2.0, compatible to V1.2, V1.1
Chipset: ISSC
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer-Speed: 3 Mbps
Max. distance: 50 m
Protection cap
Connector: USB 2.0 (USB 1.1 compatible)
IVT Software Ver. 2.6 included
Suitable for Windows 2000, XP, Vista

Part.no. BT0004

Bluetooth Headset

LogiLink



Ultralight
only 9 gram



Bluetooth headset with microphone
Bluetooth V.2, compatible to V1.2, V1.1
Transmission frequency: 2.4-2.480 GHz
Class 2, distance: 5-10 m
Lithium Polymer power pack, rechargeable
Charger for USB connector
Standby: 200 h, talking time: 4 h
Volume control, power on/off
LED for power, charging, low battery

Part.no. BT0005

Bluetooth Stereo Headset

LogiLink



Bluetooth Stereo headset with microphone
Bluetooth compliance with V.20 specification
Transmission frequency: 2.4-2.480 GHz
Class 2, distance: 5-10 m
Lithium power pack, rechargeable
Supports: A2DP, AVRCP, HSP, HFP
Standby: 200 h, talking time: 4 h
Volume control, power on/off
LED for power, charging, low battery
Charger for USB Connector

Part.no. BT0008

USB 2.0 Multi-Cardreader, Aluminium

LogiLink®



Multifunctional all-in-one cardreader
Space-saving version to take suitable
Card Read/Write device for all commercialy
available memory cards incl. SD-HC
Connection to an external USB 2.0 Port
Max. data transfer rate: 480 Mbit/s
Power supply: DC +5,0 volt via USB bus
USB connection cable included
Suitable for MAC and PC
Aluminium housing

Part.no. CR0001B

USB 2.0 Multi-Cardreader incl. SIM-Cardreader

LogiLink®



Multifunctional all-in-one Cardreader
Space-saving version to take suitable
Supports Memory Stick (MS), Multi Media Card (MMC)
Secure Digital (SD / SDHC), Micro SD (T-Flash) series
Sim Card (GSM) incl. Editing-Software
Connection to an external USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: DC +5,0 volt via USB bus
Suitable for MAC and PC

Part.no. CR0011

USB 2.0 Mini Multi-Cardreader

LogiLink®



Multifunctional all-in-one cardreader
Space-saving version to take suitable
Supports Memory Stick (MS), Multi Media Card (MMC)
Secure Digital (SD / SDHC), Micro SD (T-Flash) series
Connection to an external USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: DC +5,0 volt via USB bus
Lanyard inclusive
Suitable for MAC and PC

Part.no. CR0010

USB 2.0 Cardreader Stick

LogiLink®



USB 2.0 Mini Cardreader
Space-saving version to take suitable
Card Read/Write device for
MMC, RS-MMC, SD and SD HC
Connection to an external USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: DC +5,0 volt via USB bus
Protection cap
Suitable for MAC and PC

Part.no. CR0007

USB 2.0 Cardreader, microSD

LogiLink®



USB 2.0 Mini Cardreader
Space-saving version to take suitable
Card Read/Write device for
microSD and microSDHC
Connection to an external USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: DC +5,0 volt via USB bus
Fastening strap with trailer inclusive
Suitable for MAC and PC

Part.no. CR0009

Internal 3.5" Multi-Cardreader with USB Port

LogiLink®



3.5" Multi-Cardreader for Drive Bay
Multi Card Read/Write device for
Compaq Flash (CF), Smart Media (SM), XD
Memory Stick (MS), and Secure Digital (SD)
Connection to an internal USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: internal
USB 2.0 connector in frontpanel
3 Faceplates inclusive (black/silver/white)

Part.no. CR0005C

Internal 3.5" Multi-Cardreader incl. USB Port



3.5" Multi-Cardreader for Drive Bay
Multi Card Read/Write device for
Compaq Flash (CF), Smart Media (SM), XD
Memory Stick (MS), and Secure Digital (SD)
Connection to an internal USB 2.0 port
Max. data transfer rate: 480 Mbit/s
Power supply: internal
USB 2.0 connector in frontpanel
LED for power and activity

Part.no. CR0012

USB 2.0 Hub, 4-Port

LogiLink



USB 2.0 Hub
Power supply via USB bus
4x USB ports
Compliance with USB 2.0 standard
LED for activity
Max. data transfer rate: 480 Mbit/s
USB connection cable included
No driver installation needed
Supports Hot Plugin / Plug & Play

Part.no. UH0001A

USB 2.0 Hub, 4-Port incl. LED

LogiLink



USB 2.0 Hub with LED
Power supply via USB bus
4x USB ports
Compliance with USB 2.0 standard
Blue LED lighting
Max. data transfer rate: 480 Mbit/s
USB connection cable included
No driver installation needed
Supports Hot Plugin / Plug & Play

Part.no. UH0001C

USB 2.0 Hub, 4-Port incl. power supply

LogiLink



USB 2.0 Hub
4x USB ports
Compliance with USB 2.0 standard
LED for activity
Max. data transfer rate: 480 Mbit/s
USB connection cable & Power supply 220 volt included
No driver installation needed
Supports Hot Plugin / Plug & Play

Part.no. UA0018 / black

Part.no. UA0018A / white

USB 2.0 Hub, 4-Port incl. power supply, Aluminium

LogiLink



USB 2.0 Hub, housing made of high-grade aluminum
4x USB ports
Compliance with USB 2.0 standard
LED for activity
Max. data transfer rate: 480 Mbit/s
USB connection cable & Power supply 220 volt included
No driver installation needed
Supports Hot Plugin / Plug & Play

Part.no. UA0003

USB 2.0 Hub, 7-Port incl. LED and power supply

LogiLink



USB 2.0 Hub with LED
7x USB ports
Compliance with USB 2.0 standard
LED for activity
Blue LED lighting
Max. data transfer rate: 480 Mbit/s
USB connection cable & Power supply 220 volt included
No driver installation needed
Supports Hot Plugin / Plug & Play

Part.no. UA0026A

USB 2.0 Hub, 10-Port incl. power supply

LogiLink®



USB 2.0 Hub
10x USB ports
Compliance to USB 2.0 standard
LED for activity
Max. data transfer rate: 480 MBit/s
USB connection cable & power supply 220 volt included
No driver installation needed
Supports Hot Plug / Plug & Play

Part.no. UA0065

Frontpanel 3.5" / 5.25" Multifunction

LogiLink®



3.5" Frontpanel UA0035
1x Cardreader 55-in-1
1x USB 2.0 Port
1x IEEE1394 Fire Wire Port
1x S-ATA Port
1x E-SATA Port
2x Audio: Micro-In, Audio-Out
Including cables and screw set
For all Desktop, AT and ATX PC cases
LED for operation and activity

5.25" Frontpanel UA0036
1x Cardreader 55-in-1
2x USB 2.0 Port
1x TV-Out
2x E-SATA Port
1x Audio In: Micro, Line-In
1x Audio Out: Headset, Speakers
Including cables and screw set
For all Desktop, AT and ATX PC cases
LED for operation and activity

Part.no. UA0035 / 3,5" Frontpanel

Part.no. UA0036 / 5,25" Frontpanel

USB 2.0 to Serial Adapter

LogiLink®



USB 2.0 to Serial Adapter
Connector 1: USB A male
Connector 2: RS232 (9-pin) male
Fixing with thumbscrews
Compliance with USB 2.0 standard
Max. Speed: 480 MBit/s
Molded housing
incl. 80 cm USB extension cable

Part.no. AU0002B

USB 2.0 to Serial Adapter, 9+25-pin

LogiLink®



USB 2.0 to Serial Adapter
Connector 1: USB A male
Connector 2: RS232 (9-pin) male
Incl. Adapter DSUB-9 to DSUB-25
Fixing with thumbscrews
Compliance with USB 2.0 standard
Max. Speed: 480 MBit/s
Molded housing
Cable length: ca. 1.2 m

Part.no. UA0042

USB 2.0 to Parallel Centronics Adapter

LogiLink®



USB 2.0 to Parallel Adapter
Connector 1: USB A male
Connector 2: Centronics 36-pin male
Fixing with Clip System
Compliance with USB standard
USB full speed (12Mbps)
Molded housing
Supports EPP, ECP, bidirectional
Cable length: ca. 1.5 m

Part.no. AU0003B

USB to Parallel D-SUB Adapter

LogiLink®



USB to Parallel Adapter
Connector 1: USB A male
Connector 2: D-Sub 25-pin (parallel) female
Fixing with thumbscrews
Compliance with USB standard
USB full speed (12 Mbps)
Molded housing
Supports EPP, ECP, bidirectional
Cable length: ca. 1.8 m

Part.no. UA0054

USB to PS/2 Adapter

LogiLink®



USB to PS/2 Adapter
Connector 1: USB A male
Connector 2: 2x Mini DIN 6-pin female
Suitable for Mouse and Keyboard
Compliance with USB 1.1 standard
Max. Speed: 12 Mbps
Molded housing
Cable length: ca. 30 cm

Part.no. AU0004A

USB to Gameport Adapter

LogiLink®



USB Adapter for Gameport connector
Connector 1: USB A male
Connector 2: 1 x DSUB 15-pin female
Supports Joystick, Gamepad, Steering wheel
Integrated 4-stage switch
Compliance with USB 1.1 standard
Max. Speed: 12 Mbps
No driver installation needed
Power supply via USB bus
Cable length: 0.20 m

Part.no. UA0052A

USB to MIDI Cable Adapter

LogiLink®



USB MIDI Cable for Midi Devices & Keyboards
USB A Male to 2x MIDI 5-pin DIN Male IN/OUT
LED for operation and data stream direction
16 Midi Input and 16 Midi output channels
No driver installation needed
Power supply via USB Connector
Cable length: 3.0 m

Part.no. UA0037

USB 2.0 Easy Copy PC-Link Cable

LogiLink®



Suitable for transferring data
Connector 1: USB A male
Connector 2: USB A male
OS destination PC: Microsoft 2000/XP/Vista
OS source PC: Microsoft 2000/XP/Vista
No driver installation needed
When connecting a copy mask automatically opens
Transfer in both directions possible
Remote files can be accessed and edited

Part.no. PC0060

USB 2.0 Easy Transfer Cable

LogiLink®



Data transfer- and Connection cable
Connector 1: USB A male
Connector 2: USB A male
OS destination PC: Windows Vista
OS source PC: Windows XP or Vista
Transfer via Software
Favourites, configuration, files etc.
Data selection possible
Transfer in both directions possible
Network cable with Ressource sharing

Part.no. UA0030

USB 2.0 Repeater Cable, gray

LogiLink®



USB 2.0 extension cable
Connector 1: USB A male
Connector 2: USB A female
Max. data transfer rate: 480 MBit/s
Cascadable
Cable length: 5.00 m
Color gray

Part.no. UA0001

USB 2.0 Repeater Cable, black

LogiLink



USB 2.0 Extension cable
 Connector 1: USB A male
 Connector 2: USB A female
 Max. Transfer rate: 480 MBit/s
 Cascadable
 Cable length: 5.00 m
 Color black

Part.no. UA0001A

USB 2.0 Netlink-Cable

LogiLink



USB 2.0 Netlink-Kabel
 Connector 1: USB A male
 Connector 2: USB A male
 Suitable for transferring data
 Max. Transfer rate: 480 MBit/s
 Cable length: 2.00 m

Part.no. UA00017A

USB Line Extender over CAT5 Cable up to 60 m

LogiLink



USB Line Extender
 Extends up to 60 m
 Extension over RJ45 Patch cable
 Suitable for Mouse, Keyboard, Printer etc.
 No drivers necessary
 Patch cable not included

Part.no. UA00021D

USB 2.0 Audio & Video Grabber

LogiLink



Digitizes audio- and video signals
 Interface: USB 2.0 A male
 Connector A/V 1: RCA composite (S-VHS)
 Connector A/V 2: S-Video
 Chipset: Philips SAA7113
 IN PAL: 720 x 576 @ 25 fps
 IN NTSC: 720 x 480 @ 30 fps
 PC Display: 1024 x 768 or higher
 Format: MP3, MPEG 1,2,4, DIVX
 Software: Ulead Video Studio SE

Part.no. VG0001

USB Charger set for 12V + 220V, 500mA

LogiLink



Adapter Set for USB power supply
 PSU Adapter: USB A socket (female)
 Input: AC 100 v - 250 v, 50 Hz, 130 mA
 Output: DC 5.0 v, +/- 5 %
 Max: 500 mA, +/- 50 mA
 Car charger adapter: USB A socket (female)
 Input: DC 12 v - 24 v
 Output: DC 5.0 v, +/- 5 %
 Max: 500 mA
 LED for operation and charging

Part.no. PA0008

USB Charger set for 12V + 220V, 1000mA

LogiLink



Adapter Set for USB power supply
 PSU Adapter: USB A socket (female)
 Input: AC 100 v - 250 v, 50 Hz
 Output: DC 5.0 v, +/- 5 %
 Max: 1000 mA, +/- 50 mA
 Car charger adapter: USB A socket (female)
 Input: DC 12 v - 24 v
 Output: DC 5.0 v, +/- 5 %
 Max: 1000 mA
 LED for operation and charging

Part.no. PA0009

Wireless Keyboard Mouse Combination, 2.4 GHz

LogiLink



Wireless keyboard and mouse kit
 2.4 GHz wireless technology, 48 channels
 Mouse: 5 programmable buttons
 Sensing: optical, wheel button, 800 dpi
 Keyboard: german layout
 105 keys, 8 programmable hotkeys
 USB Micro Dongle incl. Autolink
 3-step power-save modus
 Range: 6-10 m
 Supports Plug & Play

Part.no. ID0013

Flexible Silicon Keyboard USB & PS/2

LogiLink



Flexible waterproof keyboard
 Extremely durable
 Layout: german, 106 keys
 Connector: USB A male
 Includes USB to PS/2 adapter
 Plug & Play, Hot Plug
 Dust-, dirt- and water resistant
 Silent Soft-Touch-Keys
 Material: Silicon
 Cable length: 1.50 m

Part.no. ID0018 / white

Part.no. ID0019 / black

Laser Gaming Mouse USB, 2200dpi

LogiLink



Laser Gaming Mouse 2200dpi (adjustable)
 Suitable for USB Port
 5 programmable buttons
 Vertical scroll wheel
 Resolution 1000 / 1600/ 2200 dpi
 Usable on nearly every surface
 Connection Cable ca. 1.20 m
 Suitable for right and left hand use
 Plug & Play

Part.no. ID0015

Laser Mouse USB + PS/2, 2000dpi

LogiLink



Laser Mouse 2000dpi
 Suitable for USB and PS/2 port
 3 programmable buttons
 Vertical scroll wheel
 Housing LED illuminated
 Resolution 1200 - 2000 dpi
 Usable on nearly every surface
 Connection Cable ca. 1.50 m
 Suitable for right and left hand use
 Plug & Play

Part.no. ID0009

Optical Wireless Mouse USB, 2.4 GHz, 800dpi

LogiLink



Optical Mini-Notebook-Mouse
 2.4 GHz wireless technology, 48 channels
 5 programmable buttons
 Vertical scroll wheel
 Resolution: 800 dpi
 USB Micro Dongle with Autolink
 3-step power-save modus
 Range: 6-10 m
 Plug & Play

Part.no. ID0014

Optical Mini USB Mouse with retractable cable, 800dpi

LogiLink



Optical Mini-Notebook-Mouse
 Suitable for USB port
 3 programmable buttons
 Vertical, LED illuminated scroll wheel
 Resolution 800 dpi
 Retractable USB cable
 Rubber coating
 Suitable for right and left hand use
 Plug & Play

Part.no. ID0016

Optical Mini Mouse USB with LED, 800dpi

LogiLink®



Optical Notebook Mouse 800dpi
 Suitable for USB port
 3 programmable buttons
 Vertical scroll wheel
 Housing LED illuminated (blue-red)
 Resolution 800 dpi
 Usable on nearly every surface
 Connection Cable ca. 1.50 m
 Suitable for right and left hand use
 Plug & Play

Part.no. ID0010

Optical Mouse USB, 800dpi

LogiLink®



Optical Mouse 800dpi
 Suitable for USB port
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 Usable on nearly every surface
 Connection Cable ca. 1.50 m
 Suitable for right and left hand use
 Plug & Play

Part.no. ID0011

Optical Mini Mouse USB, 800dpi

LogiLink®



Optical Mini-Notebook-Mouse USB
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 LED illuminated scroll wheel
 Connection Cable ca. 1.40 m
 Suitable for right and left hand use
 Supports Plug & Play
 Color pink

Part.no. ID0021

Optical Mini Mouse USB, 800dpi

LogiLink®



Optical Mini-Notebook-Mouse USB
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 LED illuminated scroll wheel
 Connection Cable ca. 1.40 m
 Suitable for right and left hand use
 Supports Plug & Play
 Color blue

Part.no. ID0022

Optical Mini Mouse USB, 800dpi

LogiLink®



Optical Mini-Notebook-Mouse USB
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 LED illuminated scroll wheel
 Connection Cable ca. 1.40 m
 Suitable for right and left hand use
 Supports Plug & Play
 Color orange

Part.no. ID0023

Optical Mini Mouse USB, 800dpi

LogiLink®



Optical Mini-Notebook-Mouse USB
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 LED illuminated scroll wheel
 Connection Cable ca. 1.40 m
 Suitable for right and left hand use
 Supports Plug & Play
 Color green

Part.no. ID0024

Optical Mini Mouse USB, 800dpi

LogiLink



Optical Mini-Notebook-Mouse USB
 3 programmable buttons
 Vertical scroll wheel
 Resolution 800 dpi
 LED illuminated scroll wheel
 Connection Cable ca. 1.40 m
 Suitable for right and left hand use
 Supports Plug & Play
 Color black

Part.no. ID0025

Numeric Keypad USB

LogiLink



Additional Numeric Keypad for Notebooks
 Modern Soft membrane technology
 19 Keys with multiple configuration + 3 Hotkeys
 Connection Cable ca. 1.5 m
 Ideal for fast data input
 Norm compliant with Standard-Keyboard
 Connector: USB Typ A
 No driver installation needed
 Hot Plugin / Plug & Play

Part.no. ID0008

Gaming and Grafipic Design Mousepad XXL

LogiLink



Dimensions: 300 x 400 x 2.5 mm

Professional pad for gaming
 Strong adhesive bottom for optimal traction
 Materials: Natural rubber / foam / fabric
 Material thickness: 3 mm
 Perfect balance between friktion and glide
 Also suitable for Graphic Designer
 Optimal Performance for Games
 Improves mouse accuracy and speed
 Extra large pad
 Supports all mouse types (ball, optical, laser)

Part.no. ID0017

Stereo Headset with Microphone

LogiLink



Stereo Headset with Microphone
 2x 3.5 mm phone jack
 Connector colors standardized according to PC99
 Integrated Volume Control
 Microphone: 9x7/58 +- 2dB
 Impedance: 32 Ohm @ 1 KHz
 Sensitivity: 105 dB/mW
 Frequency: 8 to 22.000 Hz
 Cable length: ca. 3 m

Part.no. HS0001 / DeLuxe

Part.no. HS0002 / Easy

Stereo Headset with high wearing comfort

LogiLink



Stereo Headset with high wearing comfort and Mic
 2x 3.5 mm phone jack
 Connector colors standardized according to PC99
 Microphone: 6x5/58 +- 2dB
 Impedance: 32 Ohm @ 1 KHz
 Sensitivity: 105 dB/mW
 Frequency: 8 to 22.000 Hz
 Cable length: ca. 3 m

Part.no. HS0011

Stereo Headset with Bass-Vibration

LogiLink



Stereo Headset with Bass Vibration and Microphone
 2x 3.5 mm phone jack
 Connector colors standardized according to PC99
 Integrated Volume Control
 Microphone: 6x5/58 +- 2dB
 Impedance: 32 Ohm @ 1 KHz
 Sensitivity: 105 dB/mW
 Frequency: 8 to 22.000 Hz
 Power supply over USB or battery
 Cable length: ca. 3 m

Part.no. HS0009

Stereo Headset with Microphone

LogiLink



HS0006

HS0005



Stereo Headset
 Headset-Out: 1x 3.5 mm phone jack
 Microphone-In: 1x 3.5 mm phone jack
 Microphone: 6x5 / 58 +- 2dB
 Impedance: 32 Ohm at 1 KHz
 Sensitivity: 105 dB/mW
 Frequency: 8 to 22.000 Hz
 Connector colors standardised according to PC99
 Cable: shielded, length ca. 3 m

Part.no. HS0006

Part.no. HS0005 / with neckband

Multimedia Microphone with Stand Foot

LogiLink



Multimedia Microphone with Stand Foot
 Sensitivity: -58dB +/- 3dB
 Directivity: omnidirectional
 Impedance: < 2.2K Ohm
 Operating voltage: 4.5 v
 Frequency range: 100 - 16KHz
 S/N Ratio: > 60dB
 Operation mode: Mono
 Connector: 3.5 mm phone jack
 Connection cable: 2 m

Part.no. HS0012

2.0 Active Speaker

LogiLink



Magnetic shielded Active Speaker
 Great sound quality
 Connector: 3.5 mm phone jack
 Output rating: 6 watt RMS (120 watt PMPO)
 Frequency range: 80Hz-18KHz
 Input impedance: 10K Ohm
 Headset jack in the front
 Integrated power supply
 Stepless volume control
 Power on/off

Part.no. SP0003

2.1 Active Speaker System

LogiLink



Magnetic shielded Speaker System
 Components: 1x Subwoofer and 2x Satellites
 Connector: 3.5 mm Phone jack
 Output rating RMS: 3 + 2x 1 watt
 Output rating P.M.P.O: 180 watt
 Frequency range: 20Hz-20KHz
 Impedance: 4 Ohm
 Power supply: 220 volt, 50 Hz
 Stepless volume control
 Power on/off

Part.no. SP0004

Audio Desktop Switch, 2-Port

LogiLink



Audio Switch for Headset and Speakers
 Input Speakers: 3.5 mm jack
 Input Headset MIC: 3.5 mm jack
 Input Headset SP: 3.5 mm jack
 Output SoundCard MIC: 3.5 mm jack
 Output SoundCard SP: 3.5 mm jack
 Intergrated Volume control
 Microphone ON/OFF Switch
 Selector switch Headset or Speakers
 Cable length: 2.50 m

Part.no. HS0010

USB 2.0 Audio Adapter, 5.1 Sound Effect

LogiLink



Audio Adapter for USB Port
 Connector: USB 2.0 Typ A male
 Output Microphone: 3.5 mm jack
 Input Speaker: 3.5 mm jack
 LED for operation, Power supply via USB bus
 Simulates 5.1 surround sound effects
 Virtual Speaker Shifter
 Plug & Play

Part.no. UA0053

Digital 7" LCD Photo Frame

LogiLink.



Display type: LCD, Size 7" (18 cm)
 Format: 16:9, Resolution: 480 x 234 pixels
 USB Host: USB 2.0 FS
 Memory Card: SD, SDHC, MMC
 Image File Format: JPG, JPEG
 Screen size: Fill, Auto Fit, Pan Scan
 Rotation: 90°/180°/270° /360°
 Interval: 5/15/30 sec., 1/5/15/30/45/60 min.
 Buttons: Mode, Rotate, Next, Back, Start/Stop
 Adjustable Stand Foot

Part.no. PX0007

Digital 7" LCD Photo Frame with Video & MP3

LogiLink.



Display type: LCD, Size 7" (18 cm)
 Format: 16:9, Resolution: 480 x 234 pixels
 USB Host: USB 2.0 FS
 Memory Card: SD, SDHC, MMC
 Image File Format: JPG, JPEG, Video: AVI
 Audio File Format: MP3, Screen size: Full, Fit
 Rotation: 90°/180°/270° /360°
 Interval: 5/10/15/30 sec., 1/3 min.
 Calendar, Clock, Alarm function
 Adjustable Stand Foot, Remote control

Part.no. PX0008

Digital 7" LCD HR Photo Frame with Video & MP3

LogiLink.



Display: Digital-LCD, Size 7" (18 cm)
 Format: 16:9, Resolution: 800 x 480 pixels
 USB Host: USB 2.0 FS
 Memory Card: SD, SDHC, MMC
 Image File Format: JPG, JPEG, Video: AVI
 Audio File Format: MP3, WMA, Image-Size: Full, Fit
 Rotation: 90°/180°/270° /360°
 Interval: 5/10/15/30 sec., 1/5/15/30/45/60 min.
 Calendar, Clock, Alarm function, Remote control
 Integrated Speaker, Headphone output

Part.no. PX0009

Digital 7" LCD Photo Frame

LogiLink.



Display Typ: LCD, Size 7" (18 cm)
 Format: 16:9, Resolution: 480 x 234 pixels
 USB Host: USB 2.0 FS
 Memory Card: SD, SDHC, MMC
 Image File Format: JPG, JPEG
 Screen size: Normal, Full, Auto Fit
 Rotation: 90°/180°/270° /360°
 Interval: 5/15/30 sec., 1/5/15/30/45/60 min.
 Buttons: Mode, Rotate, Next, Preview, Play/Pause
 Time and Calendar

Part.no. PX0010

USB 2.0 2.5" IDE HDD Enclosure

LogiLink



External USB 2.0 Harddisk enclosure
 Suitable for 2.5" IDE HDD
 Supports High Capacity HDD
 Transfer rate: 480 MBit/s
 Power supply via USB Port
 Housing made of high-grade aluminum
 Hot-Plug / Plug & Play
 No driver installation needed
 Included in delivery: USB 2.0 connection cable
 + protective bag and screwdriver

Part.no. UA0040A

USB 2.0 2.5" SATA HDD Enclosure

LogiLink



UA0041A

UA0041B

External USB 2.0 Harddisk enclosure
 Suitable for 2.5" SATA HDD
 Supports High Capacity HDD
 Transfer rate: 480 MBit/s
 Power supply via USB Port
 Housing made of high-grade aluminum
 Hot-Plug / Plug & Play
 No driver installation needed
 Included in delivery: USB 2.0 connection cable
 + protective bag and screwdriver



Part.no. UA0041A / silver

Part.no. UA0041B / black

USB 2.0 3.5" SATA HDD Enclosure

LogiLink



External USB 2.0 Harddisk enclosure
 Suitable for 3.5" SATA HDD
 Supports High Capacity HDD
 Transfer rate: 480 MBit/s
 Housing made of high-grade aluminum
 Hot-Plug / Plug & Play
 No driver installation needed
 Included in delivery: USB 2.0 connection cable
 + Power supply 220 volt & Stand Foot

Part.no. UA0060

USB 2.0 3.5" SATA HDD Enclosure

LogiLink



External USB 2.0 Harddisk enclosure
 Suitable for 3.5" SATA HDD
 Supports High Capacity HDD
 Transfer rate: 480 MBit/s
 Housing made of high-grade plastic
 Hot-Plug / Plug & Play
 No driver installation needed
 Included in delivery: USB 2.0 connection cable
 + Power supply 220 volt

Part.no. UA0063

USB 2.0 3,5" IDE / SATA HDD Enclosure with LAN

LogiLink



External USB 2.0 Harddisk enclosure
 Suitable for 3.5" IDE HDD (only UA0056)
 Suitable for 3.5" SATA HDD (only UA0057)
 Supports High Capacity HDD
 Transfer rate: 480 MBit/s
 Housing made of high-grade aluminum
 Hot-Plug / Plug & Play
 No driver installation needed
 Included in delivery: USB 2.0 connection cable
 + Power supply 220 volt

Part.no. UA0056 for IDE HDD

Part.no. UA0057 for SATA HDD

2 Bay Gigabit LAN & USB NAS Server

LogiLink



External USB 2.0 2-Bay SATA Harddisk enclosure
 CPU: Storlink SL3516
 Flash: 8MB Flash, RAM: 128MB DDR
 LAN: Gigabit port x 1
 HDD external: 2x USB 2.0
 HDD internal: 2x 3.5" SATA HDD
 Supports CIFS, FAT16, FAT32, NTFS, ext2, ext3
 Integrated FTP and Samba Server
 P2P, Media Server, iTunes Server, FTP, HTTP
 USB Mass Storage Access for networks

Part.no. NS0044

USB 2.0 Docking Station for 2.5" + 3.5" SATA HDD

LogiLink



Docking Station for SATA Harddisks
 Connected with PC via USB 2.0
 Suitable for 2.5" and 3.5" SATA Harddisks
 Specification according to USB 2.0 standard
 Max. transfer rate: 480 Mbps
 Eject button to disconnect the Harddisk
 LED for operation and activity
 Supports USB Hot Plug
 Included in delivery: 0.8 m USB connection cable
 + Power supply 220 volt

Part.no. QP0001

USB 2.0/e-SATA Docking Station for 2.5" + 3.5" SATA HDD

LogiLink



USB 2.0 Docking Station
 Connected with PC via USB 2.0 or e-SATA
 Suitable for 2.5" and 3.5" SATA Harddisks
 Specification according to USB 2.0 standard
 and Serial ATA II Electrical 1.0
 Eject button to disconnect the Harddisk
 LED for operation and activity
 Supports USB and eSATA Hot Plug
 Included in delivery: 0.8 m USB connection cable
 + Power supply 220 volt

Part.no. QP0002

USB 2.0 to IDE Adapter

LogiLink



USB 2.0 to IDE Adapter
 Connection Computer: USB A male
 Connector 1: 3.5" HDD 40-pin female
 Connector 2: 2.5" HDD 44-pin female
 Max. transfer rate: 480 MBit/s
 Sealed plastic hood
 Also supports CDROM and DVD(R)
 Cable length: 1.2 m
 Incl. 5.25" power cable

Part.no. AU0005A

USB 2.0 to IDE & SATA Adapter with OTB

LogiLink



USB 2.0 to IDE & SATA Adapter
 Connection Computer: USB A male
 Connector 1: 3.5" HDD / 40-pin female
 Connector 2: 2.5" HDD / 44-pin female
 Connector 3: SATA female
 Max. transfer rate: 480 MBit/s
 One Touch Backup (OTB) Function
 Also supports CDROM and DVD(R)
 Cable length: 1.2 m
 Incl. 5.25" power cable, SATA cable + 220v power supply

Part.no. AU0006C

SATA to IDE ATAPI (PATA) Converter

LogiLink



Run IDE Devices on SATA Controller
 Connector 1: S-ATA male
 Source: Mainboard or Controller
 Connector 2: IDE 40-pin female
 Target: IDE harddisk, CD, DVD, etc.
 No drivers needed
 Included in delivery: Converter
 + S-ATA connection cable
 + internal power cable

Part.no. AD0005A

IDE ATAPI (PATA) to SATA Converter

LogiLink



Run SATA Devices on IDE Controller
 Connector 1: IDE 40-pin female
 Source: Mainboard or IDE Controller
 Connector 2: S-ATA
 Target: S-ATA HDD, DVD, etc.
 No drivers needed
 Included in delivery: Converter
 + S-ATA connection cable
 + internal power cable

Part.no. AD0006A

SATA to IDE & IDE to SATA Converter

LogiLink



Converter S-ATA to IDE or backward (bi-directional)
 Connector 1: S-ATA male
 Connector 2: IDE 40-pin female (PATA)
 For Mainboard, Controller, Harddisk, DVD
 Conversion Type switch
 Standardized connectors
 No drivers needed
 LED for operation and activity
 Cable length: 0.35 m
 Included in delivery: S-ATA connection cable

Part.no. AD0008

PC Cooling Fan, black

LogiLink



PC Cooling Fan, black plastic
 Dimensions: 80x80x25 mm (FAN101)
 Dimensions: 120x120x25 mm (FAN103)
 Volume flow: 50 CFM
 Noise: 32,6 dB(A)
 Working voltage: 12 V DC
 Voltage range: 12 V DC
 Power consumption: 16 mA
 Nominal speed: 2.500 rpm
 Lifetime: 30.000 hours
 Connector: 5.25" Y-Connector

Part.no. FAN101 / 80 x 80 mm

Part.no. FAN103 / 120 x 120 mm

PC Cooling Fan, Acrylic with LED

LogiLink



Acrylic PC Cooling Fan with 4 blue LED
 Dimensions: 80x80x25 mm (FAN102)
 Dimensions: 120x120x25 mm (FAN104)
 Volume flow: 50 CFM
 Noise: 32,6 dB(A)
 Working voltage: 12 V DC
 Voltage range: 12 V DC
 Power consumption: 16 mA
 Nominal speed: 2.500 rpm
 Lifetime: 30.000 hours
 Connector: 5.25 Zoll Y-Connector

Part.no. FAN102 / 80 x 80 mm

Part.no. FAN104 / 120 x 120 mm

5.25" Mobile Rack for 3.5" IDE HDD, with 2 Fan



Mobile Rack for 3,5" Harddisks
 Drive Bay: 5.25 inch
 Material frame: High-grade plastic
 Material slot: High-grade plastic
 2 ball bearing mounted fan
 LED for power status and activity
 Electronic lock
 Supported HDD: 3.5" IDE
 Transfer Modes: UDMA-133
 S-ATA Connection cable: Screw set

Part.no. MR0001

5.25" Mobile Rack for 3.5" SATA HDD, with 2 Fan



Mobile Rack for 3.5" Harddisks
 Drive Bay: 5.25 inch
 Material frame: High-grade plastic
 Material slot: High-grade plastic
 2 ball bearing mounted fan
 LED for power status and activity
 Electronic lock
 Supported HDD: 3.5" serial ATA
 Transfer Modes: 150 Mbps
 Included in delivery: Screw set

Part.no. MR0002

5.25" Mobile Rack for 3.5" IDE HDD, with 2 Fan, Alu.



Mobile Rack for 3.5" Harddisks
 Drive Bay: 5.25 inch
 Material Frame: Aluminium
 Material Slot: Aluminium
 2 ball bearing mounted fan
 LED for power status and activity
 Electronic lock
 Supported HDD: 3.5" IDE
 Transfer Modes: UDMA-133
 Included in delivery: Screw set

Part.no. MR0003


5.25" Mobile Rack for 3.5" SATA HDD, 2 Fan, Alu.



Mobile Rack for 3.5" Harddisks
 Drive Bay: 5.25 inch
 Material Frame: High-grade plastic
 Material Slot: High-grade plastic
 2 ball bearing mounted fan
 LED for power status and activity
 Electronic lock
 Supported HDD: 3.5" serial ATA
 Transfer Modes: 150 Mbps
 Included in delivery: Screw set

Part.no. MR0004

5.25" Mobile Rack for 3.5" FDD, 2pcs. Set



Mobile Rack 5.25" for FDD Floppy Devices
 Metal main frame
 Sturdy plastic frame
 Standardized for any Desktop, AT and ATX Tower with 5.25 inch drive bay
 Also suitable for ZIP and LS devices
 Included in delivery: Screw set

Part.no. AD0003

5.25" Mounting Brackets for 3.5" HDD Harddisks, 2pcs. Set



Mounting Bracket for 3.5" Devices
 2 angled metal rails
 Standardized for any Desktop, AT and ATX Tower with 5.25 inch drive bay
 Standard 3.5" frame
 Suitable for any 3.5" Harddisk
 Flexible mounting
 Included in delivery: Screw set

Part.no. AD0004

3.5" Mounting Set for 2.5" HDD Harddisks



Mounting Bracket for 2.5" Devices
 2 angled metal rails
 40-pin IDE Adapter incl. power supply
 Standardized for any Desktop, AT and ATX Tower with 2.5 inch drive bay
 Suitable for any 2.5" Harddisk
 Flexible mounting
 Included in delivery: Screw set

Part.no. AM0001

Gigabit Express Card

LogiLink[®]



Gigabit Express Card
Works great with Notebooks
IEEE 802.3,802.3ab,802.3u,802.1q
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Chipset: Agere
Connector: 1x RJ45
Express Card 34 mm standard
Compatible to 1-Lane PCI-Express

Part.no. PC0035

Express Card, 1x Serial

LogiLink[®]



Express Card 1x Serial
Works great with Notebooks
Connector: Express Card
Suitable for 34 mm and 54 mm slot
External connectors: 1x RS232
Specification according to 16C550 UART
Automatic IRQ addressing
Plug & Play
No driver installation needed

Part.no. PC0047

Express Card, 2x IEEE1394a

LogiLink[®]



Express Card, 2x IEEE1394a
Works great with Notebooks
2x IEEE1394a 6-pin external
1-Lane (x1) PCI-Express compatible
Transfer rate: 400 MBit/s
Chipset: Texas Instruments TI
External power supply (optional)
Hot Plugin / Plug & Play

Part.no. PC0036A

Express Card, 1x Parallel

LogiLink[®]



Express Card, 1x Parallel
Works great with Notebooks
Suitable for 34 mm and 54 mm slot
External Connectors: 1x DSUB25 Jack
Printer Modus: SPP, EPP, ECP
Automatic IRQ addressing
Plug & Play
Included in delivery: S-ATA connection cable

Part.no. PC0048

Express Card, 4x USB 2.0

LogiLink[®]



Express Card, 4x USB 2.0
Works great with Notebooks
Suitable for 34 mm and 54 mm Slot
External connectors: 4x USB 2.0
Transfer rate: 480 Mbit/s
Overvoltage protection
Power supply connector
No driver installation needed

Part.no. PC0049

Express Card, 2x e-SATA

LogiLink[®]



Express Card, 2x e-SATA
Works great with Notebooks
2x e-SATA external female
Suitable for 34 mm and 54 mm Slot
Compliance with Serial ATA 2.0 standard
Max. transfer rate: 3.0 GB/s
Supports Raid 0 and Raid 1
PCI-Express Throughput
Gen2i, Gen2m SATA II Electrical Specification Rev. 1.0

Part.no. PC0034A

Gigabit PC Card

LogiLink



Gigabit PC Card
Works great with Notebooks
IEEE802.3, 802.3u, 802.3ab, 802.3x
Supports: 10/100/1000 Mbps
Full Duplex: 20/200/2000 Mbps
Automatic speed detection
Suitable for Slot: 32 Bit PC Card Typ 2
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for link, activity, error

Part.no. PC0011

PC Card, 4x USB 2.0

LogiLink



PC Card USB 2.0
Works great with Notebooks
4x USB 2.0 external
Connector: CardBus Typ-2
32 Bit compatible
Transfer rate: 480 MBit/s
Overvoltage protection
Hot Plugin / Plug & Play

Part.no. PC0040

PC Card, 2x IEEE1394a

LogiLink



PC Card IEEE1394a
Works great with Notebooks
2x IEEE1394a 6-pin external
Connector: CardBus Typ-2
32 Bit compatible
Transfer rate: 400 MBit/s
Overvoltage protection
Hot Plugin / Plug & Play

Part.no. PC0026A

PC Card, 1x Parallel

LogiLink



PC Card, 1x Parallel
Works great with Notebooks
Connector: CardBus Typ-2
Suitable for Cardbus Typ 32 Bit
External connector: 1x 1x DSUB25
Printer Modus: SPP, EPP, ECP
Automatic IRQ addressing
Plug & Play
No driver installation needed

Part.no. PC0051

PC Card, 1x Serial

LogiLink



PC Card, 1x Serial
Works great with Notebooks
Connector: CardBus Typ-2
Suitable for Carbus Typ 32 Bit
External connector: 1x 1x RS232
Specification according to 16C550 UART
Automatic IRQ addressing
Plug & Play
No driver installation needed

Part.no. PC0050

PC Card, 2x e-SATA

LogiLink



PC card, 2x e-SATA
Works great with Notebooks
Suitable for Cardbus Slot 32 Bit
Connector: 2x e-SATA external
54 mm Slot compatible
Compliance with Serial ATA 2.0 standard
Max. transfer rate: 3.0 GB/s
Supports Raid 0 and Raid 1
Plug & Play
Gen2i, Gen2m SATA II Electrical Specification Rev. 1.0

Part.no. PC0052

USB 2.0 DVB-T Receiver for digital TV & Radio

LogiLink



Terrestrial Receiver for television and radio
 Connector: USB 2.0 (USB 1.1 compatible)
 Frequency: TV: 48.25-863.25 MHz,
 Supports DVB Protocol according to ETS 300 744
 Real Time Digital Video Recording (DVR)
 Electronic Program Guide (EPG)
 Teletext, Timeshifting, Channel AutoScan
 Software for configuring and installing channels
 Power supply via USB Port
 Incl. Remote Control and antenna

Part.no. VG0002

Notebook Cooler with 3 Fans

LogiLink



3 High-powered-fan for heat dissipation
 Air flow volume: 30 CFM
 Speed: 3.000 rpm
 Noise: 21 dBA
 Voltage: DC 5V
 Current consumption: 0.26A
 Power consumption: 1.3 watt
 3 LED for power status and activity
 No driver installation needed
 Power supply via Notebook USB Port

Part.no. UA0059

Flexible USB LED Light

LogiLink



UA0008

UA0043



USB Notebook Light with LED
 Illuminates Keyboard and documents
 Connect to USB port
 Power supply via USB port
 Flexible Gooseneck
 Length: ca. 45 cm
 Efficient LED lamps
 Light angle and inclination adjustable
 Automatically turns on when notebook starts
 Low power consumption

Part.no. UA0008 with 5 LEDs

Part.no. UA0043 with 1 LED

USB LED Notebook Light

LogiLink



USB Notebook Light
 Illuminates Keyboard and documents
 Connect to USB port
 Power supply via USB port
 Convenient fixation clip
 Cable length: ca. 90 cm
 Efficient due to 2 white LEDs
 Light angle and tilt adjustable
 Automatically turns on when Notebook starts
 Low power consumption

Part.no. UA0009

Notebook Lock with Number Code

LogiLink



Notebook anti-theft protection
 Manufactured acc. industry-standards
 Fixation at Notebook standard safety slash
 Rugged steel cable, metal lock
 Protective PVC Coating
 Combination lock with 10.000 combination
 Individual combination adjustable
 Cable length: ca. 1.50 m

Part.no. NBS002 / 1.5 m

Notebook Lock with Key

LogiLink



Notebook anti-theft protection
 Manufactured acc. industry-standards
 Fixation at Notebook standard safety slash
 Rugged steel cable, metal lock
 Protective PVC Coating
 Lock with 2 Keys
 Cylinder out of hardened steel
 Cable length: ca. 1.50 m

Part.no. NBS003 / 1.5 m

USB Notebook Travel Set

LogiLink



USB Notebook Set composed of:

- 1) Optical USB Mini Mouse 3 buttons
800 dpi, Scroll wheel, convenient flexcable
- 2) USB Numeric Keypad, 18 keys, LED for operation
- 3) USB 2.0 Mini 4-Port Hub with LED,
Power supply over USB bus
- 4) USB LED Light with flexible gooseneck
- 5) High quality case with zipper

Part.no. UA0010

Notebook Universal PSU Adapter 220 Volt 75 Watt



Universal Charger for Notebooks

Suitable for home and office use

Input voltage: 100 - 240 v AC, 50/60 Hz

Output: 15,16,18,19,20,22,24 volt

Max. output: 75 watt, 3.5 A

5 different connectors

Polarity: swappable

Integrated overvoltage protection

Charging and operation function

Part.no. PA0001

Notebook Universal PSU Adapter 220 Volt 120 Watt



Universal Charger for Notebooks

Suitable for home and office use

Input voltage: 100 - 240 v AC, 50/60 Hz

Output: 15,16,18,19,20,22,24 volt

Max. output: 120 watt, 6 A

5 different connectors + Dell adapter

Polarity: swappable

Integrated overvoltage protection

Charging and operation function

Part.no. PA0002

Notebook Car Universal PSU Adapter 12 Volt 75 Watt



Universal Car-Charger for Notebooks

Suitable for 12 volt / DC cigarette lighter

Input voltage: 12-13,80 volt

Output: 15,16,18,19,20,24 volt

Max. output: 75 watt, 3500 mA

6 different connectors

Polarity: +Polarity always inside

Integrated overvoltage protection

Charging and operation function

Part.no. PA0003

Notebook Car Universal PSU Adapter 12 Volt 120 Watt



Universal Car-Charger for Notebooks

Suitable for 12 volt / DC cigarette lighter

Input Voltage: 12-16 volt

Output: 15,16,18,19,20,22,24 volt

Max. output: 120 watt, 6A

5 different connectors + Dell adapter

Polarity: swappable via adapter

Integrated overvoltage protection

Charging and operation function

Part.no. PA0004

Notebook Car/Truck Universal PSU Adapter 24 Volt 8A



Universal Car-/Truck-Charger for Notebooks

Suitable for 24 volt / DC cigarette lighter

Input voltage: 22-26 volt

Output: 12,15,16,18,19,20,22,24 volt

Max. output: 8A

5 different connectors + Dell adapter

Polarity not swappable, cable conductor always positiv

Integrated overvoltage protection

Charging and operation function

Part.no. PA0005

Notebookbag up to 15.4" „Advance“



Suitable for Notebooks up to 15.4"
 Bag made from high quality 600D Nylon
 Padded interior compartments with lots of extras
 Includes shoulder strap
 Exterior dimensions: 42 x 32 x 8.5 cm
 Notebook compartment: 40 x 32 x 4 cm

Part.no. NB0003

Notebookbag up to 17" „Extend“



Suitable for Notebooks up to 15.4"
 Bag made from high quality 1000D Nylon
 Padded interior compartments with lots of extras
 Includes shoulder strap
 Additional Notebook sleeve included
 Exterior dimensions: 47 x 36 x 12 cm
 Notebook compartment: 44 x 32 x 5 cm

Part.no. NB0004

Notebookbag up to 15.4" „Enhance“



Suitable for Notebooks up to 15.4"
 Bag made from high quality 600D Nylon
 Leather front pocket
 Padded interior compartments with lots of extras
 Includes shoulder strap
 Additional Notebook Sleeve included
 Exterior dimensions: 42 x 32 x 7 cm
 Notebook compartment: 37 x 29 x 3 cm

Part.no. NB0005

Rucksack für Notebooks up to 15.4" „Guide“



Suitable for Notebooks up to 15.4"
 Bag made from high quality 600D Nylon
 Padded interior compartments with lots of extras
 Includes shoulder strap with high wearing comfort
 Gentle soft back cushion
 Additional Notebook Sleeve included
 Exterior dimensions: 47 x 33 x 15 cm
 Notebook compartment: 37 x 29 x 3 cm

Part.no. NB0006

Notebook Sleeve up to 15.4" „Assist“



Suitable for Notebooks up to 15.4"
 Bag made from „Anti-Shock“ foam
 Maximum protection for the device
 Protection against shocks and scratches
 Extra documents bag
 Exterior dimensions: 39 x 30 x 3.5 cm
 Notebook compartment: 37 x 29 x 3 cm

Part.no. NB0007

Notebook & Document Bag up to 13.3" „Commute“



Suitable for Notebooks up to 13.3"
 Bag made from „Anti-Shock“ foam
 Maximum protection for the device
 Protection against shocks and scratches
 Incl. retractable handles
 Extra documents bag
 Exterior dimensions: 35 x 26 x 2.5 cm
 Notebook compartment: 34 x 25 x 2 cm

Part.no. NB0008

Notebook & Document Bag up to 15.4" „Commute"



Suitable for Notebooks up to 15.4"
 Bag made from „Anti-Shock" foam
 Maximum protection for the device
 Protection against shocks and scratches
 Incl. retractable handles
 Extra documents bag
 Exterior dimensions: 39 x 30 x 3.5 cm
 Notebook compartment: 37 x 29 x 3 cm

Part.no. NB0009

Notebook & Document Bag up to 17" „Commute"



Suitable for Notebooks up to 17"
 Bag made from „Anti-Shock" foam
 Maximum protection for the device
 Protection against shocks and scratches
 Incl. retractable handles
 Extra documents bag
 Exterior dimensions: 43 x 32 x 4 cm
 Notebook compartment: 42 x 31 x 3 cm

Part.no. NB0010

Universal Camera Bag with Rain Shelter



Padded Universal Bag for Cameras
 Protection against shocks and scratches
 Bag made from high quality Nylon
 Adjustable and removeable shoulder strap
 Hand strap
 Incl. Rain hood (removeable)
 Extra Pocket for Memory Cards

Part.no. NB0011

Universal Bag for Camera Accessories „Aperture"



Padded Bag for Cameras and Accessories
 Protection against shocks and scratches
 Bag made from high quality Nylon
 Large pockets for 2 lenses and a camera
 Strap for attaching the tripod
 Adjustable shoulder strap
 Incl. Rain hood (removeable)

Part.no. NB00012



Notebook Bag up to 15.4" „LogiLink"

LogiLink.




Suitable for Notebooks up to 15.4"
 Bag made from high quality 600D Nylon
 Padded interior compartments with lots of extras
 Includes shoulder strap
 Exterior dimensions: 40 x 31 x 9 cm
 Notebook compartment: 39 x 29 x 7 cm

Part.no. NB0001

Fast Ethernet PCI Card

LogiLink



Fast Ethernet PCI Card
IEEE802.3, 802.3u, 802.3x
Speed: 10/100 MBit/s
In Full Duplex Mode up to 20/200 MBit/s
Automatic speed detection
32 Bit PCI Rev.2.2
Connector: 1x RJ45
Chipset: Realtek (only PC0039)
LED for link, activity, error

Part.no. PC0039 / Realtek

Part.no. PC0044

Gigabit PCI Card

LogiLink



Gigabit PCI Card
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit/s
In Full Duplex Mode up to 20/200/2000 MBit/s
Automatic speed detection
Connector: 1x RJ45
32 Bit PCI Rev.2.2
FIFO(8K/64K) buffers

Part.no. PC0012

USB 2.0 PCI Card, 4+1

LogiLink



USB 2.0 PCI Card
4x USB 2.0 Typ A female external
1x USB 2.0 Typ A female internal
Automatic IRQ addressing
Max. transfer rate: 480MBit/s
Overvoltage protection
Plug & Play
Chipset: VIA (only PC0028)
Chipset: NEC (only PC0041)

Part.no. PC0028 / VIA Chip

Part.no. PC0041 / NEC Chip

IEEE1394a PCI Card, 3+1

LogiLink



IEEE1394a PCI Card
3x IEEE1394 6-pin external
1x IEEE1394 6-pin internal
Automatic IRQ addressing
Max. transfer rate: 400MBit/s
Overvoltage protection
Incl. IEEE1394a 6-pin to 4-pin cable
Plug & Play
Chipset: VIA

Part.no. PC0006A

USB 2.0 / IEEE1394a Combo PCI Card

LogiLink



USB 2.0/IEEE1394a Combo PCI Card
External: 4x USB 2.0 Typ A, 2x IEEE1394a
Internal: 1x USB 2.0 Typ A, 1x IEEE1394a
Automatic IRQ addressing
Overvoltage protection
Incl. IEEE1394a 6-pin to 4-pin cable
Plug & Play

Part.no. PC0007A

PCI Card, 1x Parallel

LogiLink



PCI Card 1x Parallel
1x D-SUB 25-pin external
Specification: IEEE1248
Automatic IRQ addressing
Printer mode: SPP, EPP, ECP
Supports Bidirectional Mode
Plug & Play

Part.no. PC0013

PCI Card, 2x Parallel

LogiLink



PCI Card 2x Parallel
2x D-SUB 25-pin external
Specification: IEEE1248
Automatic IRQ addressing
Printer mode: SPP, EPP, ECP
Supports Bidirectional Mode
Plug & Play

Part.no. PC0014

PCI Card, 1x Serial

LogiLink



PCI Card 1x Serial
1x RS232 9-pin external
Specification: 16C550 UART
Automatic IRQ addressing
Max. Transfer rate: 1 Mbyte/s
Supports 16 Byte transmit receive
Plug & Play

Part.no. PC0015

PCI Card, 2x Serial

LogiLink



PCI Card 2x Serial
2x RS232 9-pin external
Specification: 16C550 UART
Automatic IRQ addressing
Max. transfer rate: 1 Mbyte/s
Supports 16 Byte transmit receive
Plug & Play

Part.no. PC0016

PCI Card, 4x Serial

LogiLink



PCI Card 4x Serial
4x RS232 9-pin external
Specification: 16C550 UART
Automatic IRQ addressing
Max. transfer rate: 1 Mbyte/s
Supports 16 Byte transmit receive
Plug & Play

Part.no. PC0017

PCI Card, 2x Serial & 1x Paralel

LogiLink



PCI Card 2x Serial + 1x Parallel
2x RS232 9-pin external
1x D-SUB 25-pin external
Specification: 16C550 UART & IEEE1248
Automatic IRQ addressing
Plug & Play

Part.no. PC0018

PC Card to PCI Add-On Card

LogiLink



PC Card to PCI Card
PCI according Local Bus specification 2.2
and PC Card acc. standard release 8.0
Suitable for PC Card Type 1, 2 and 3
Compatible to 32-bit PC card 3.3v and 5v
Supports Hot Swapping
LED for link / error
Plug & Play
Chipset: RICOH (PC0023B)
Chipset: ENE (PC0023A)

Part.no. PC0023B / RICOH Chip

Part.no. PC0023A / ENE Chip

PCI Karte, e-SATA / SATA & IDE

LogiLink



PCI Card e-SATA / SATA & IDE
 1x e-SATA external
 2x SATA and 1x IDE 40-pin internal
 Automatic IRQ addressing
 Max. transfer speed: 150 Mbps
 Overvoltage protection
 Plug & Play

Part.no. PC0005A

PCI Sound Card Dolby 5.1 6-Channel incl. Gameport

LogiLink



PCI Sound Card Dolby 5.1 6-Channel incl. Gameport
 PCI 32 Bit female
 Integrated 5.1 decoder
 Supports 2, 4, 6 channel speaker mode
 Modi: 2.0, 2.1, 4.0, 4.1, 5.1
 Full-duplex playback and recording
 Game and MIDI interface
 Chipset: CMI8738
 Line-In, Microphone-In
 Direct Sound 3D compatible

Part.no. PC0027B

IDE to Compact Flash & Micro Drive Adapter

LogiLink



IDE (PATA) to CF and MD Adapter
 Connector: 1x ATA IDE 40-pin
 Out: CF/MD Cardslot
 Suitable for Compact Flash Type I, Type II, Micro-drive
 CF selectable power supply: +3.3v or +5v
 Master or slave mode selection
 Internal power supply 3.5", +5 volt
 LED for operation and CF Data stream

Part.no. PC0042

PCI IDE Raid Controller, 2-Port

LogiLink



ATA 133 PCI Raid Controller
 2x Ultra ATA-133 internal
 RAID 0 (Striping) and RAID 1 (Mirroring)
 Max. transfer speed: 133MBit/s
 Max. devices: 4x IDE devices
 Included in delivery: 1x Ultra ATA cable
 Chipset: Silicon Image
 Plug & Play

Part.no. PC0038A

Gigabit PCI Express Card

LogiLink




Gigabit PCI Express Card
 IEEE802.3, 802.3u, 802.3ab, 802.3x
 Supports: 10/100/1000 Mbps
 Full Duplex: 20/200/2000 Mbps
 Chipset: Agere Met1310
 Mounting slot: PCI-Express x1
 Connector: 1x RJ45
 FIFO(8K/64K) buffers
 LED for link, activity, error

Part.no. PC0029A

PCI Express Card 3 + 1x IEEE1394a

LogiLink



IEEE1394a PCI Express Card
 3x IEEE1394a 6-pin external
 1x IEEE1394a 6-pin internal
 Max. transfer rate: 400MBit/s
 Overvoltage protection
 Plug & Play
 Chipset: PLX8111 + NEC

Part.no. PC0030

PCI Express Card, 2x Serial

LogiLink




PCI Express Card 2x Serial
 2x RS232 9-pin external
 Specification: 16C550 UART
 Chipset: NetMOS
 Max. transfer speed: 1 Mbyte/s
 Supports 16 Byte transmit receive
 Plug & Play

Part.no. PC0031

PCI Express Card, 2x Parallel

LogiLink



PCI Express Card 2x Parallel
 2x D-SUB 25-pin external
 Specification: IEEE1248
 Chipset: NetMOS
 Printer mode: SPP, EPP, ECP
 Supports bidirectional mode
 Plug & Play

Part.no. PC0032

PCI Express Card, 2x Serial & 1x Parallel

LogiLink




PCI Express Card 2x Serial + 1x Parallel
 2x RS232 9-pin external
 1x D-SUB 25-pin external
 Specification: 16C550 UART & IEEE1248
 Automatic IRQ addressing
 Printer mode: SPP, EPP, ECP
 Supports bidirectional mode
 Chipset: NetMOS
 Plug & Play

Part.no. PC0033

PCI Express Card, 1x eSATA & 1x SATA

LogiLink



PCI Express Card, 1x eSATA & 1x SATA
 1x e-SATA external
 1x SATA internal
 Specification: Serial ATA 1.0
 Max. transfer speed: 2.5GB/s
 Independent SATA channels
 RAID 0 (Striping) and RAID 1 (Mirroring)
 Supports: ATA II Port-Multiplier

Part.no. PC0002

PCI Express Card, 2x SATA & 1x IDE

LogiLink



SATA PCI Express Card
 2x SATA internal
 1x ATA IDE 40-pin internal
 Standardized according to Serial ATA 1.0
 Max. transfer rate: 2.5GB/s
 2 Independent SATA Channels
 RAID 0 (Striping) and RAID 1 (Mirroring)
 Output swing control

Part.no. PC0003A

USB to Express Card Adapter

LogiLink



USB to Express Card Adapter
 Connector 1: USB A male
 Connector 2: Express Card female
 LED for operation and activity
 Specification: USB 2.0 standard
 USB High Speed (480Mbps)
 Compatible with USB 1.0, 1.1
 5V DC power supply optional connectable
 Plug & Play / Hot-Plug
 Cable length: 1.0 m

Part.no.UA0061

Gigabit PC Card

LogiLink



Gigabit PC Card
Works great with Notebooks
IEEE802.3, 802.3u, 802.3ab, 802.3x
Supports: 10/100/1000 Mbps
Full Duplex: 20/200/2000 Mbps
Automatic speed detection
Suitable for slot: 32 Bit PC Card Typ 2
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for link, activity, error

Part.no. PC0011

PC Card, 4x USB 2.0

LogiLink



PC Card USB 2.0
Works great with Notebooks
4x USB 2.0 external
Connector: CardBus Typ-2
32 Bit compatible
Transfer rate: 480 MBit/s
Overvoltage protection
Hot Plugin / Plug & Play

Part.no. PC0040

PC Card, 2x IEEE1394a

LogiLink



PC Card IEEE1394a
Works great with Notebooks
2x IEEE1394a 6-pin external
Connector: CardBus Typ-2
32 Bit compatible
Transfer rate: 400 MBit/s
Overvoltage protection
Hot Plugin / Plug & Play

Part.no. PC0026A

PC Card, 1x Parallel

LogiLink



PC Card, 1x Parallel
Works great with Notebooks
Connector: CardBus Typ-2
Suiteable for Cardbus Typ 32 Bit
External connector: 1x 1x DSUB25
Printer mode: SPP, EPP, ECP
Automatic IRQ addressing
Plug & Play
No driver installation needed

Part.no. PC0051

PC Card, 1x Serial

LogiLink



PC Card, 1x Serial
Works great with Notebooks
Connector: CardBus Typ-2
Suitable for Carbus Slot 32 Bit
External connector: 1x 1x RS232
Specification according to 16C550 UART
Automatic IRQ addressing
Plug & Play
No driver installation needed

Part.no. PC0050

PC Card, 2x e-SATA

LogiLink



PC card, 2x e-SATA
Works great with Notebooks
Suitable for Cardbus Slot 32 Bit
Connector: 2x e-SATA external
54 mm Slot compatible
Compliance with Serial ATA 2.0 standard
Max. transfer rate: 3.0 GB/s
Supports Raid 0 and Raid 1
Plug & Play
Gen2i, Gen2m SATA II Electrical Specification Rev. 1.0

Part.no. PC0052

Gigabit Express Card

LogiLink



Gigabit Express Card
 Works great with Notebooks
 IEEE 802.3,802.3ab,802.3u,802.1q
 Speed: 10/100/1000 MBit
 In Full Duplex Mode up to 20/200/2000 MBit
 Chipset: Agere
 Connector: 1x RJ45
 Express Card 34 mm standard
 Compatible to 1-Lane PCI-Express

Part.no. PC0035

Express Card, 1x Serial

LogiLink



Express Card 1x Serial
 Works great with Notebooks
 Connector: Express Card
 Suitable for 34 mm and 54 mm slot
 External Connectors: 1x RS232
 Specification according to 16C550 UART
 Automatic IRQ addressing
 Plug & Play
 No driver installation needed

Part.no. PC0047

Express Card, 2x IEEE1394a

LogiLink



Express Card, 2x IEEE1394a
 Works great with Notebooks
 2x IEEE1394a 6-pin external
 1-Lane (x1) PCI-Express compatible
 Transfer rate: 400 MBit/s
 Chipset: Texas Instruments TI
 External power supply (optional)
 Hot Plugin / Plug & Play

Part.no. PC0036A

Express Card, 1x Parallel

LogiLink



Express Card, 1x Parallel
 Works great with Notebooks
 Suitable for 34 mm and 54 mm Slot
 External Connectors: 1x DSUB25 female
 Printer mode: SPP, EPP, ECP
 Automatic IRQ addressing
 Plug & Play
 Included in delivery: Connection cable

Part.no. PC0048

Express Card, 4x USB 2.0

LogiLink



Express Card, 4x USB 2.0
 Works great with Notebooks
 Suitable for 34 mm and 54 mm slot
 External connectors: 4x USB 2.0
 Transfer rate: 480 Mbit/s
 Overvoltage protection
 Power supply connector
 No driver installation needed

Part.no. PC0049

Express Card, 2x e-SATA

LogiLink



Express Card, 2x e-SATA
 Works great with Notebooks
 2x e-SATA external female
 Suitable for 34 mm and 54 mm slot
 Compliance with Serial ATA 2.0 standard
 Max. transfer rate: 3.0 GB/s
 Supports Raid 0 and Raid 1
 PCI-Express Throughput
 Gen2i, Gen2m SATA II Electrical Specification Rev. 1.0

Part.no. PC0034A

KVM Switch 2-Port PS/2

LogiLink



KVM Switch 2-Port PS/2
 Switch controls up to 2 Computer
 Input Keyboard: 2x Mini Din 6-pin male
 Input Mouse: 2x Mini Din 6-pin male
 Input Video: 2x HDB15 male
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 female
 Video resolution up to 2048x1536, DDC2B
 Operation without power supply, Cable length: 1.2 m

Part.no. KP0001 / 1.2 m

KVM Switch 2-Port PS/2

SMART VIEW



KVM Switch 2-Port PS/2
 Switch controls up to 2 Computer
 Input Keyboard: 2x Mini Din 6-pin male
 Input Mouse: 2x Mini Din 6-pin male
 Input Video: 2x HDB15 male
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 female
 Video resolution up to 1920x1440, DDC2B
 Operation without power supply, Cable length: 1.2 m

Part.no. OC12 / 1.2 m

KVM Switch 2-Port USB

SMART VIEW



KVM Switch 2-Port USB
 Switch controls up to 2 Computer
 Input Keyboard, Mouse: 2x USB A male
 Input Video: 2x HDB15 male
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 female
 Video resolution up to 1920x1440, DDC2B
 LED for operation and PC activity
 Operation without power supply, Cable length: 1.2 m

Part.no. OC12U / 1.2 m

KVM Switch 2-Port PS/2 with Audio

SMART VIEW



KVM Switch 2-Port PS/2 with Audio
 Switch controls up to 2 Computer
 Input Keyboard/Mouse: 4x Mini Din 6-pin male
 Input Audio: 4x 3.5 mm jack
 Input Video: 2x HDB15 male
 Output Keyboard, Mouse: 2x Mini Din 6-pin female
 Output Audio: 4x 3.5 mm jack
 Output Video: 1x HDB15 male
 Video resolution up to 1920x1440, DDC2B
 Operation without power supply, Cable length: 1.2 m

Part.no. OC12A / 1.2 m

KVM Desktop Switch 2-Port PS/2

SMART VIEW



KVM Desktop Switch 2-Port PS/2
 Switch controls up to 2 Computer
 Input Keyboard: 2x Mini Din 6-pin female
 Input Mouse: 2x Mini Din 6-pin female
 Input Video: 2x HDB15 female
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 male
 Video resolution up to 1920x1440
 Connector for power supply (not included)

Part.no. IC712I

KVM Desktop Switch 4-Port PS/2

SMART VIEW



KVM Desktop Switch 4-port PS/2
 Switch controls up to 4 Computer
 Input Keyboard: 4x Mini Din 6-pin female
 Input Mouse: 4x Mini Din 6-pin female
 Input Video: 4x HDB15 female
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 male
 Video resolution up to 1920x1440
 Accessories: Power supply

Part.no. IC714I

KVM Desktop Switch 8-Port PS/2



KVM Desktop Switch 8-Port PS/2
Switch controls up to 8 Computer
Input Keyboard: 8x Mini Din 6-pin female
Input Mouse: 8x Mini Din 6-pin female
Input Video: 8x HDB15 female
Output Keyboard: 1x Mini Din 6-pin female
Output Mouse: 1x Mini Din 6-pin female
Output Video: 1x HDB15 male
Video resolution up to 1920x1440
Power supply included

Part.no. IC718I

KVM Desktop Switch 2-Port USB



KVM Desktop Switch 2-Port USB
Switch controls up to 2 Computer
PC Keyboard / Mouse: 2x USB Typ-B female
PC Audio: 4x 3.5 mm stereo jack (Speaker + MIC)
PC Video: 2x HDB15 male
Console Keyboard / Mouse: 2x USB Typ-A female
Console Audio: 2x 3.5 mm stereo jack (Speaker + MIC)
Console Video: 1x HDB15 female
Video resolution up to 1920x1440
Power supply connector (Power supply not included)

Part.no. IC712AU

KVM Desktop Switch 4-Port USB



KVM Desktop Switch 4-Port USB
Switch controls up to 4 Computer
PC Keyboard / Mouse: 4x USB Typ-B female
PC Audio: 8x 3.5 mm stereo jack (Speaker + MIC)
PC Video: 4x HDB15 male
Console Keyboard / Mouse: 2x USB Typ-A female
Console Audio: 2x 3.5 mm stereo jack (Speaker + MIC)
Console Video: 1x HDB15 female
Video resolution up to 1920x1440
Power supply connector (Power supply not included)

Part.no. IC714AU

KVM Desktop Switch 2-Port DVI



KVM Desktop Switch 2-Port DVI
Switch controls up to 2 Computer
Input Mouse: 2x Mini Din 6-pin female
Input Keyboard: 2x Mini Din 6-pin female
Input Video: 2x DVI female
Output Mouse: 2x Mini Din 6-pin female
Output Keyboard: 2x Mini Din 6-pin female
Output Video: 1x DVI female
Video resolution up to 1280x1024
Power supply included

Part.no. IC712ID

KVM Desktop Switch 4-Port DVI



Compact KVM PS/2 Switch
Switch controls up to 4 Computer
Input Mouse: 4x Mini Din 6-pin female
Input Keyboard: 4x Mini Din 6-pin female
Input Video: 4x DVI female
Output Mouse: 2x Mini Din 6-pin female
Output Keyboard: 2x Mini Din 6-pin female
Output Video: 1x DVI female
Video resolution up to 1280x1024
Power supply included

Part.no. IC714ID

Video Splitter 2-Port VGA 300 MHz



Video Splitter 2-Port VGA 300 MHz
Input: 1x HD DSUB 15-Pin connector
Output: 2x HD DSUB 15-pin female
Max. distance: 65 m
Signal: VGA, SVGA, XGA, QXGA, UXGA
Resolution up to: 1920x1440, 60 Hz
Bandwidth: 300 MHz
Integrated amplifier
Rugged metal housing
Power supply included

Part.no. VS812H

Video Splitter 4-Port VGA 300 MHz



Video Splitter 4-Port VGA 300 MHz
 Input: 1x HD DSUB 15-pin male
 Output: 4x HD DSUB 15-pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, Multisync
 Resolution up to: 1920x1440, 60 Hz
 Bandwidth: 300 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS814H

Video Splitter 8-Port VGA 300 MHz



Video Splitter 8-Port VGA 300 MHz
 Input: 1x HD DSUB 15-pin male
 Output: 8x HD DSUB 15-pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, Multisync
 Resolution up to: 1920x1440, 60 Hz
 Bandwidth: 300 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS818H

Video Splitter 16-Port VGA 300 MHz



Video Splitter 16-Port VGA 300 MHz
 Input: 1x HD DSUB 15-Pin male
 Output: 16x HD DSUB 15-Pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, Multisync
 Resolution up to: 1920x1440, 60 Hz
 Bandwidth: 300 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS8116H

Video Splitter 2-Port VGA 400 MHz



Video Splitter 2-Port VGA 400 MHz
 Input: 1x HD DSUB 15-Pin male
 Output: 4x HD DSUB 15-Pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, QXGA, UXGA
 Resolution up to: 2048x1536, 60 Hz
 Bandwidth: 400 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS812PF

Video Splitter 4-Port VGA 400 MHz



Video Splitter 4-Port VGA 400MHz
 Input: 1x HD DSUB 15-pin male
 Output: 4x HD DSUB 15-pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, Multisync
 Resolution up to: 2048x1536, 60 Hz
 Bandwidth: 400 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS814PF

Video Splitter 8/16-Port VGA 400 MHz



Video Splitter 8/16-Port VGA 400MHz
 Input: 1x HD DSUB 15-Pin male
 Output: 8/16x HD DSUB 15-Pin female
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, Multisync
 Resolution up to: 2048x1536, 60 Hz
 Bandwidth: 400 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. VS818PF / 8-Port

Part.no. VS8116PF / 16-Port

Video Splitter 2-Port DVI 165MHz



VGA Video Signal Splitter
 Input: 1x DVI (24+5) female
 Output: 2x DVI (24+5) female
 Max. distance: 10 m
 Supports high resolution UXGA
 Resolution up to: 1600x1200, 60 Hz
 Bandwidth: 25-165 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. DS812F

Video Splitter 4-Port DVI 165MHz



VGA Video Signal Splitter
 Input: 1x DVI (24+5) female
 Output: 4x DVI (24+5) female
 Max. distance: 10 m
 Supports high resolution UXGA
 Resolution up to: 1600x1200, 60 Hz
 Bandwidth: 25-165 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. DS814F

Video Splitter 8-Port DVI 165MHz



Video Splitter 8-Port DVI
 Input: 1x DVI (24+5) female
 Output: 8x DVI (24+5) female
 Max. distance: 10 m
 Supports high resolution UXGA
 Resolution up to: 1600x1200, 60 Hz
 Bandwidth: 25-165 MHz
 Integrated amplifier
 Rugged metal housing
 Power supply included

Part.no. DS818F

Video Switch HDMI 2-Port incl. Remote Control



HDMI
 Video Switch HDMI 2-Port incl. Remote Control
 Input: 1x HDMI A-Type female
 Output: 2x HDMI A-Type female
 Max. distance: 10 m
 Signal: UXGA, 480p, 480i, 720p, 1080i, 1080p
 Specification according to: HDMI 1.2
 Max. resolution: 1600x1200, 60Hz
 Switching via remote control
 LED display, Rugged metal housing
 Included in delivery: Power supply, remote control

Part.no. HRM2212

Video Switch HDMI 4-Port incl. Remote Control



HDMI
 Video Switch HDMI 4-Port incl. Remote Control
 Input: 1x HDMI A-Type female
 Output: 4x HDMI A-Type female
 Max. distance: 10 m
 Signal: UXGA, 480p, 480i, 720p, 1080i, 1080p
 Specification according to: HDMI 1.2
 Max. Resolution: 1600x1200, 60Hz
 Switching via remote control
 LED display, Rugged metal housing
 Included in delivery: Power supply, remote control

Part.no. HRM2214

Video Switch HDMI 8-Port incl. Remote Control



HDMI
 Video Switch HDMI 8-Port incl. Remote Control
 Input: 1x HDMI A-Type female
 Output: 8x HDMI A-Type female
 Max. distance: 10 m
 Signal: UXGA, 480p, 480i, 720p, 1080i, 1080p
 Specification according to: HDMI 1.2
 Max. Resolution: 1600x1200, 60Hz
 Switching via remote control
 LED display, Rugged metal housing
 Included in delivery: Power supply, remote control

Part.no. HRM2218

19" KVM Console 1-Port incl. 15 inch TFT



Professional KVM Console
 Controls 1 Computer
 Input Keyboard, Mouse, Video: 1x HD15 female
 Display: 15" TFT, unbreakable glass
 Video resolution up to 1024x768
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Useful LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1501

19" KVM Console 8-Port incl. 15 inch TFT



Professional KVM Switch Console
 Controls up to 8 Computer or Server
 Input Keyboard, Mouse, Video: 8x HD15 female
 Display: 15" TFT, unbreakable glass
 Video resolution up to 1024x768
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Switch buttons with LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1508

19" KVM Console 16-Port incl. 15 inch TFT



Professionelle KVM Switch Console
 Controls up to 16 Computer or Server
 Input Keyboard, Mouse, Video: 16x HD15 female
 Display: 15" TFT, unbreakable glass
 Video resolution up to 1024x768
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Switch buttons with LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1516

19" KVM Console 1-Port incl. 17 inch TFT



Professional KVM Console
 Controls 1 Computer
 Input Keyboard, Mouse, Video: 1x HD15 female
 Display: 17" TFT, unbreakable glass
 Video resolution up to 1280x1024
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Useful LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1701

19" KVM Console 8-Port incl. 17 inch TFT



Professional KVM Switch Console
 Controls up to 8 Computer or Server
 Input Keyboard, Mouse, Video: 8x HD15 female
 Display: 17" TFT, unbreakable glass
 Video resolution up to 1280x1024
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Switch buttons with LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1708

19" KVM Console 16-Port incl. 17 inch TFT



Professional KVM Switch Console
 Controls up to 16 Computer or Server
 Input Keyboard, Mouse, Video: 16x HD15 female
 Display: 17" TFT, unbreakable glass
 Video resolution up to 1280x1024
 Keyboard layout: On request, default is german
 Integrated Touchpad
 Switch buttons with LED in Console
 Firmware Update Function
 Accessories: 19" mounting kit, power supply, gender changer

Part.no. IC1716

Video Amplifier DVI up to 50 m Single Link



DVI Video signal amplifier
 Input: 1x DVI female
 Output: 1x DVI female
 Max. Distance signal: 50 m
 Max. Distance HDTV: 5 m
 Signal: UXGA, 480p, 480i, 720p, 1080i
 Supports HDCP
 Signaling: Single Link
 Rugged metal housing
 Optional power supply

Part.no. DB01S

Video Amplifier DVI up to 50 m Dual Link



DVI Video signal amplifier
 Input: 1x DVI female
 Output: 1x DVI female
 Max. Distance signal: 50 m
 Max. Distance HDTV: 5 m
 Signal: UXGA, 480p, 480i, 720p, 1080i, 1080p
 Supports HDCP
 Signaling: Dual Link
 Rugged metal housing
 Optional power supply

Part.no. DB01D

Video Amplifier HDMI 50 m



HDMI
 HDMI Video and Audio signal amplifier
 Input: 1x HDMI A-Type female
 Output: 1x HDMI A-Type female
 Max. Distance Signal: 50 m
 Max. Distance HDTV: 5 m
 Signal: UXGA, 480p, 480i, 720p, 1080i
 Specification according to HDMI 1.2
 Integrated amplifier
 Rugged metal housing
 Optional power supply

Part.no. HB01

Octopus Cable for 19" KVM Console IC15xx/IC17xx



Connection cable for Console to PC
 Suitable for Console Models IC15xx and IC17xx
 Console: 1x HD-15 male
 Computer VGA: 1x HD-15 male
 Computer PS/2: 2x MiniDIN6 male
 Supports high VGA resolutions
 VGA plug with thumbscrews
 All plugs with sealed bonnets
 Plug color in accordance with PC99 specification

Part.no. CK0001 / 1.80 m

Part.no. CK0002 / 3.00 m

Octopus Cabel for KVM Switches



Connection cable for KVM to PC
 KVM VGA: 1x HD-15 female
 KVM PS/2: 2x MiniDIN6 male
 Computer VGA: 1x HD-15 male
 Computer PS/2: 2x MiniDIN6 male
 Supports high VGA resolutions
 VGA plug with thumbscrews
 All plugs with sealed bonnets
 Plug color in accordance with PC99 specification

Part.no. CK0003 / 1.5 m

Part.no. CK0004 / 3 m

Part.no. CK0005 / 5 m



KVM Switch PS/2



Pocket KVM PS/2 Switch
 Switch controls up to 2/4 Computer
 PC Keyboard, Mouse: 4/8x Mini Din 6-pin female
 PC Monitor: 2/4x HDB 15 male
 PC Audio: 2/4x 3.5 mm stereo jack
 Console Keyboard, Mouse: 2x Mini Din 6-pin female
 Console Monitor: 1x HDB 15 female
 Console Audio: 1x 3.5 mm Stereo jack
 Video resolution up to 2048x1536
 Works without power supply

Part.no. CS62AZ / 2-Port

Part.no. CS64AZ / 4-Port

KVM Pocket Switch USB



Pocket KVM USB Switch
 Switch controls up to 2/4 Computer
 PC Keyboard, Mouse: 1/2x USB Typ A male
 PC Monitor: 2/4x HDB 15 male
 PC Audio: 2/4x 3.5 mm Stereo male
 Console Keyboard, Mouse: 2x Mini Din 6-pin female
 Console Monitor: 1x HDB 15 female
 Console Audio: 1x 3.5 mm stereo jack
 Video resolution up to 2048x1536
 Works without power supply

Part.no. CS62UZ / 2-Port

Part.no. CS64UZ / 4-Port


KVM Switch 2-Port USB DVI



Pocket KVM USB DVI Switch
 Switch controls up to 2 Computer
 PC Keyboard, Mouse: 4x USB Typ A male
 PC Monitor: 2x DVI male
 PC Audio: 4x 3.5 mm stereo jack (Speaker + MIC)
 Console Keyboard, Mouse: 2x USB Typ A female
 Console Monitor: 1x DVI male
 Console Audio: 2x 3.5 mm stereo jack
 Video resolution up to 1920x1200
 Works without power supply

Part.no. CS62DU

KVM Switch 2-Port PS/2 & USB

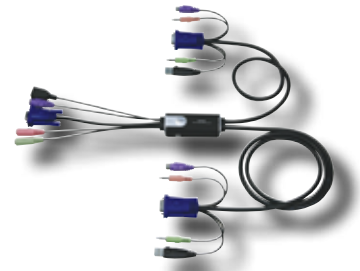

Pocket KVM PS/2 & USB Hybrid Switch
 Switch controls up to 2 Computer
 PC Keyboard, Mouse: 2x Mini Din 6 Pin male 2x USB Typ A male
 PC Monitor: 2x HDB 15 male
 PC Audio: 4x 3.5 mm stereo jack (Speaker + MIC)
 Console Keyboard, Mouse: 1x Mini Din 6-pin female, 1x USB Typ A female
 Console Monitor: 1x HDB 15 female
 Console Audio: 2x 3.5 mm stereo jack (Speaker + MIC)
 Video resolution up to 2048x1536
 Works without power supply

Part.no. CS52A

KVM Desktop Switch PS/2



Compact KVM PS/2 Switch
 Switch controls up 2/4 Computer
 PC Keyboard, Mouse: 4/8x Mini Din 6-pin male
 PC Monitor: 2/4x HDB 15 male
 Console Keyboard, Mouse: 2x Mini Din 6-pin female
 Console Monitor: 1x HDB 15 female
 Video resolution up to 1920x1440
 Works without power supply
 Incl. 2x 1.2 m KVM cable PS/2 (CS82AC)
 Incl. 2x 1.2 m + 2x 1.8 m cable PS/2 (CS84AC)

Part.no. CS82AC / 2-Port

Part.no. CS84AC / 4-Port

KVM Desktop Switch USB Dual-VGA



Compact KVM USB Switch
 Switch controls up 2/4 Dual VGA Computer
 PC Audio, VGA-1: 2/4x SPHD15 male
 PC Keyboard, Mouse, VGA-2: 2/4x SPHD15 female
 Console Keyboard, Mouse: 2x USB Typ A female
 Console Video: 2x HDB 15 female
 Console Audio: 2x 3.5 mm stereo jack (Speaker + MIC)
 Video resolution up to 2048x1536, Independent Switching
 Integrated 2-port USB Hub for Printer, Scanner etc.
 Included in delivery: Power supply & 2/4 x KVM cable

Part.no. CS1742 / 2-Port

Part.no. CS1744 / 4-Port

KVM Desktop Switch USB with OSD



Compact KVM USB Switch with OSD
 Switch controls up to 2/4 Computer
 PC Keyboard, Mouse, Monitor: 2/4x SPHD15 female
 PC Audio: 4/8x 3.5 mm stereo jack (Speaker + MIC)
 Console Keyboard, Mouse: 2x USB Typ A female
 Console Video: 2x HDB 15 female
 Console Audio: 2x 3.5 mm stereo jack (Speaker+MIC)
 Video resolution up to 2048x1536, Independent Switching
 Integrated 2-port USB Hub 2.0 for Printer, Scanner etc.
 Incl. Power supply and 2/4 x KVM cable

Part.no. CS1732B / 2-Port

Part.no. CS1734B / 4-Port

KVM Desktop Switch 2-Port USB DVI with Dolby 7.1



Compact KVM USB DVI Switch 7.1 Sound
 PC Keyboard, Mouse: 2x USB Typ B female
 PC Monitor: 2x DVI female
 PC Audio: 12x 3.5 mm stereo jack (Speaker 7.1 + MIC)
 Console Keyboard, Mouse: 2x USB Typ A female
 Console Monitor: 1x DVI female
 Console Audio: 6x 3.5 mm stereo jack (Speaker 7.1 + MIC)
 Video resolution up to 2560x1600
 Integrated 2-port USB Hub 2.0 for Printer, Scanner etc.
 Incl. Power supply, 2x KVM cable 1.8 m & 2x Audio cable sets

Part.no. CS1782 / 2-Port

KVM Desktop Switch 4-Port USB DVI



Compact KVM USB DVI Switch
 PC Keyboard, Mouse: 4x USB Typ B female
 PC Monitor: 4x DVI female
 PC Audio: 8x 3.5 mm stereo jack (Speaker + MIC)
 Console Keyboard, Mouse: 2x USB Typ A female
 Console Monitor: 1x DVI female
 Console Audio: 2x 3.5 mm stereo jack (Speaker + MIC)
 Video resolution up to 2560x1600
 Integrated 2-port USB Hub 2.0 for Printer, Scanner etc.
 Incl. Power supply, 4x KVM cable 1.8 m & 1x USB->PS/2 Converter

Part.no. CS1784 / 4-Port

19" KVM Switch USB



Daisy Chain KVM USB Switch
 Switch controls up to 8/16 Computer
 Input Keyboard, Mouse, Video: 8/16x SPHD15 female
 Input Chain: 1x DB-25 female
 Output Keyboard, Mouse: 2x USB-A female
 Output Mouse: 1x Mini Din 6-pin female
 Output Chain: 1x DB-25 male
 Video resolution up to 2048x1536
 Password Function (PSP) for security
 Accessories: 19" Kit, power supply, 2x KVM KVVM USB cable

Part.no. CS1708 / 8-Port

Part.no. CS1716 / 16-Port

19" KVM Switch PS/2



Cascadable KVM PS/2 Switch
 Switch controls up to 4 Computer
 Input Keyboard: 4/8x Mini Din 6-pin female
 Input Mouse: 4/8x Mini Din 6-pin female
 Input Video: 4/8x HDB15 female
 Output Keyboard: 1x Mini Din 6-pin female
 Output Mouse: 1x Mini Din 6-pin female
 Output Video: 1x HDB15 male
 Video resolution up to 1920x1440
 Accessories: 19" kit, power supply

Part.no. CS9134 / 4-Port

Part.no. CS9138 / 8-Port

19" KVM Console incl. 17" TFT



19" KVM Console incl. 17" TFT, 16-Port KVM
 Up to 512 PCs via Daisy Chain
 Dual-Interface – Supports connections of PS/2 or USB Systems
 LCD 115° swivel, additional USB-Port for backup/configuration etc.
 Connecting PS/2 or USB Systems via connecting modules
 Supports Broadcast – Keyboard commands are transmitted to all connected PC
 Firmware upgrade for any DaisyChain connected switch at the same time
 Variable mounting depth by optional mounting rails
 Max. resolution up to 1280x1024
 Fingerprint recognition - up to 4 User definable (only CL5716MF)

Part.no. CL5716M

Part.no. CL5716MF / with fingerprint recognition

19" KVM Console 1-Port incl. 17 inch TFT



TFT Console 17" LCD
 19" Rack mounting (1HE)
 Connection PC/KVM Keyboard: 1x Mini Din 6-pin female
 Connection PC/KVM Mouse: 1x Mini Din 6-pin female
 Connection PC/KVM Monitor: 1x HDB15 male
 Connection 2nd Console: 1x SPHD-15 female
 Video resolution up to 1280x1024
 DDC, DDC2 and DDC2B
 Internal power supply
 No software required

Part.no. CL1000G

19" CAT5 KVM Switch



19" CAT5 KVM Switch, 8-/16- Port
 Up to 256/512 PCs via Daisy Chain
 Connection modules for PS/2, USB, MAC, SUN, VT100 Systems
 Supported OS: Win 2000/XP/Vista, Linux, MAC, Unix, FreeBSD
 Switching via buttons, hotkey or OSD
 Distance PC<->Switch up to 40 m (1280x1024)
 Max. resolution up to 1600x1200
 Hot Pluggable – Adding/Removing of PCs without shutting down switch
 No additional software required
 Up to 4 User and 1 Administrator definable

Part.no. KH1508 / 8-Port

Part.no. KH1516 / 16-Port

19" CAT5 IP KVM Switch



19" CAT5 IP KVM Switch, 8-/16-Port
 Up to 128/256 PC via Daisy Chain
 Internet Browser Access, Windows Client/Java Client is incl.
 Connection modules for PS/2, USB, MAC, SUN, VT100 Systems
 Supported OS: Win 2000/XP/Vista, Linux, MAC, Unix, FreeBSD
 Switching via buttons, hotkey or OSD
 Distance PC<->Switch up to 40 m (1280x1024), max. resolution up to 1600x1200
 Hot Pluggable – Adding/Removing of PCs without shutting down switch
 No additional software required
 Up to 64 User definable – up to 32 simul. IP-connections possible

Part.no. KH1508I / 8-Port

Part.no. KH1516I / 16-Port

19" CAT5 High Density (1U) KVM Switch



19" CAT5 High Density (1U) KVM Switch, 8-/16-Port
 Up to 512/4096 PCs via 3-Level-Cascading possible
 Up to 128/1024 PCs via Non-Blocking-Cascading possible
 Connection modules for PS/2, USB, MAC, SUN, VT100 Systems
 Supportes OS: Win 2000/XP/Vista, Linux, MAC, Unix, FreeBSD
 Switching via buttons, hotkey or OSD
 Distance PC<->Switch up to 40 m (1280x1024), max. resolution up to 1600x1200
 Hot Pluggable – Adding/Removing of PCs without shutting down switch
 No additional software required
 Up to 96 User definable – Reights management to Port-Basis possible

Part.no. KH2508 / 8-Port

Part.no. KH2516 / 16-Port

19" KVM Console Dual Rail incl. 19" TFT



19" KVM Console Dual Rail incl. 19" TFT
 Dual-Rail-Technology enables independend moving of keyboard and screen
 LCD 120° slewable
 105-keys keyboard, SUN Keyboard Emulation
 Dual-Interface –Supports connections from PS/2 or USB Systems
 Connection of an additional PS/2 or USB Console possible (Reverse)
 Additional USB-Port for connecting a mouse (front)
 Variable mounting depth by optional mounting rails
 Max. resolution 1280x1024

Part.no. KL1100N

19" KVM Console Dual Rail incl. 17" TFT



19" KVM Console Dual Rail incl. 17" TFT, 16-Port KVM
 Up to 512 PC via Daisy Chain
 Dual-Rail-Technology enables independend moving of keyboard and screen
 LCD 120° slewable, Super A-Grade Panel
 Connecting PS/2 or USB Systems via connection modules
 Connection of an additional PS/2 Console possible (Reverse)
 Up to 4 User and 1 Administrator definable
 Supports Broadcast – Keyboard commands are transmitted to all connected PC
 Variable mounting depth by optional mounting rails
 Max. resolution 1280x1024

Part.no. KL1116M

Virtual VNC Console



Virtual VNC Console
 Supports wireless transmission of each desktop to a projector
 Suitable for projectors and monitors with VGA port
 Supports 802.11 b/g
 Easy switching between PC via a mouse click
 WEP-Encryption (64,128,256-bit)
 High resolution up to 1280x1024
 No Access-Point required
 Supports static IP and IP over DHCP

Part.no. KE8220

HDMI Video Switch 4-Port



incl. Remote Control



HDMI Video Switch 4-Port
 IN: 4x HDMI female
 OUT: 1x HDMI female
 VGA Resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 2.5Gbps / 250MHz
 Vertical frequency: 60 Hz
 Specification: HDMI1.3 + HDCP1.0/1.1
 Incl. remote control

Part.no. VS481A

HDMI Video Splitter



HDMI Video Splitter 2/4-Port
 IN: 1x HDMI female
 OUT: 2/4x HDMI female
 VGA resolution: 640x480 up to 1920x1200
 HDTV: 480i/576i/480p/576p/720p/1080i/1080P
 Supports: HDMI + HDCP pass through
 Bandwidth: 1.65Gbps / 165MHz
 Vertical frequency: 60 Hz
 Specification: HDMI 1.2+ HDCP 1.0/1.1
 Incl. remote control

Part.no. VS182 / 2-Port

Part.no. VS184 / 4-Port

KVM Extender VGA PS/2 150 m



KVM Extender PS/2 150 m
 Strengthen KVM signal, CAT5 cabling
 Local Keyboard: 2x Mini Din 6-pin male
 Local Mouse: 2x Mini Din 6-pin male
 Local Video: 2x HDB15 male
 Remote Keyboard: 1x Mini Din 6-pin female
 Remote Mouse: 1x Mini Din 6-pin female
 Remote Video: 1x HDB15 female
 Video resolution up to 1280x1024
 2x power supply incl., no software required

Part.no. CE250A

KVM Extender USB via CAT5 150 m



KVM Extender USB CAT5 150 m
 Strengthen KVM signal up to 150 m via CAT5 cable
 Connects USB keyboard and mouse
 Dual Console - Remote and local console port
 Audio support - Speaker and microphone
 RS232-Port, Local for configuration, Remote for e.g. Barcodescanner
 Resolution up to 1600x1200
 Incl. 2x Power supply, 1x KVM-cable, 19" mounting angle

Part.no. CE750

HDMI Extender CAT5 60 m



Extends HDMI signal up to a distance of 60 m
 Use of CAT5/CAT6 cable - 40 m 1080p, -60 m 1080i (HDTV)
 Conforms to HDMI 1.3b specifications
 HDCP compliant
 Supports 12-bit color-depth for HDMI formats
 Signal Rate: 2.25 Gbps for 1080p
 IN: 1x HDMI female
 OUT: 2x RJ45 socket
 Incl. 2x Power supply, 4x wall fixing

Part.no. VE800

Video Matrix with Audio



VGA Switch with Matrix Function
 Input: 2/4x HD DSUB 15-pin male, 2/4x Audio
 Output: 2/4x HD DSUB 15-pin male, 2/4x Audio
 Max. distance: 65 m
 Signal: VGA, SVGA, XGA, UXGA, Multisync
 Resolution up to: 1920x1440, 60 Hz
 Suitable for monitors and projectors
 Integrated amplifier
 Rugged metal housing
 Included: Power supply, VGA cable, Audio cable

Part.no. VS0202 / 2-in 2-out

Part.no. VS0204 / 2-in 4-out

USB 2.0 Switch



Switch for 2/4 computer on 1 terminal
 Computer: 2/4x USB-B male
 Terminal: 1x USB-A male
 High quality housing
 Compatible with USB 2.0 standard
 Max. transfer rate: 480 MBit/s
 USB A connection cable included
 Overvoltage protection
 Supports Hot Plugin / Plug & Play

Part.no. US221 / 2-Port

Part.no. US421 / 4-Port

KVM Switch USB with File Transfer



USB<->USB KVM Switch with File Transfer Function
 Controls Remote-PC/Notebook via local PC/Notebook
 Connector for Printer/Scanner on USB 2.0 Switch Port
 Graphical User Interface
 Plug & Play, self installing software
 File transfer via drag & drop
 No external power supply required

Part.no. CS661

USB Line Extender via CAT5 Cable



USB Line Extender
 Extends up to 60 m
 Extension via RJ45 patch cable
 Suitable for: Mouse, Keyboard, Printer etc.
 No drivers required
 Patch cable not included

Part.no. UCE60

USB 2.0 Hub, 4 Port incl. Magnet



Extension for 4x USB Ports
 Outputs: 4x USB-A
 Connection to: USB-A
 Magnets on the bottom side
 Compatible with USB 2.0 standard
 Max. transfer rate: 480 MBit/s
 USB cable included
 No driver installation required
 Supports Hot Plugin / Plug & Play

Part.no. UH284

USB 2.0 Hub, 4 Port incl. Power Supply



Extension for 4x USB Ports
 Outputs: 4x USB-A
 Connection to: USB-A
 High quality housing
 Compatible with USB 2.0 standard
 Max. transfer rate: 480 MBit/s
 USB cable included
 220 volt power supply, overvoltage protection
 Supports Hot Plugin / Plug & Play

Part.no. UH275

HDMI Cable - Premium

LogiLink



Retail blister packaging

HDMI
High Definition Multimedia Interface

High Quality HDMI cable
2x HDMI Typ A, 19-pin male
LogiLink Logo on two-colored male
Cable in high-quality blister packaging
Transmission of audio and video data
Gold plated connectors and contacts
Supports HDMI 1.3b

Part.no. CH0011 / 2 m

Part.no. CH0014 / 3 m

HDMI Cable



HDMI
High Definition Multimedia Interface

Premium HDMI cable
2x HDMI Typ A, 19-pin male
Transmission of audio and video data
Gold plated connectors and contacts
Supports HDMI 1.3b

Part.no. CH0016 / 1.5 m

Part.no. CH0006 / 2 m

HDMI Cable

HDMI
High Definition Multimedia Interface

HDMI cable
2x HDMI Typ A, 19-pin male
Gold plated connectors and contacts
Transmission of audio and video data
Cable with 2x ferrite core
Double shielded
Standardized according to UL-20276
Supports HDMI 1.3b

Part.no. CH0001 / 2 m

Part.no. CH0002 / 3 m

Part.no. CH0003 / 5 m

Part.no. CH0007 / 10 m

Part.no. CH0008 / 15 m



Display Port Cable

Display Port cable
2x Display Port 20-pin male
Gold plated connectors and contacts
Transmission of audio and video data
Double shielded

Part.no. CV0029 / 2 m

Part.no. CV0030 / 3 m

Part.no. CV0031 / 5 m

Part.no. CV0032 / 10 m

Part.no. CV0033 / 15 m



HDMI to DVI Cable



HDMI

HDMI to DVI cable
 Connector 1: HDMI Typ A (19-pin) female
 Connector 2: DVI-D (18+1) male
 Gold plated contacts
 DVI mounting with mounting thumbscrews
 DVI occupancy: DVI-D (18+1)
 Sealed plastic hood
 Supports Full HD

Part.no. CH0004 / 2 m

Part.no. CH0013 / 3 m

Part.no. CH0015 / 5 m

DVI Cable



DVI-D cable
 Connector 1: DVI-D (24+1) male
 Connector 2: DVI-D (24+1) male
 Gold plated contacts
 Transmission of video data
 Cable with 2x ferrite core
 Double shielded
 Cable Gauge: AWG 28

Part.no. CD0001 / 2 m

Part.no. CD0002 / 3 m

Part.no. CD0003 / 5 m

DVI Extension Cable



DVI-D extension cable
 Connector 1: DVI-D (24+1) male
 Connector 2: DVI-D (24+1) female
 Gold plated contacts
 Transmission of video data
 Cable with 2x ferrite core
 Double shielded
 Cable Gauge: AWG 28

Part.no. CD0004 / 3 m

Part.no. CD0005 / 5 m

Part.no. CD0006 / 10 m

HDMI Adapter



AH0005

AH0006


HDMI

HDMI Adapter
 Connector 1: HDMI 19-pin female
 Connector 2: HDMI 19-pin male
 Gold plated contacts
 Transmission of audio and video data
 Supports HDMI 1.3b and also
 480i, 480p, 720p, 1080i, 1080p

Part.no. AH0005 / 90° angulated

Part.no. AH0006

HDMI / DVI Adapter



AH0001

AH0002

HDMI

HDMI to DVI Adapter AH0001
 Connector 1: HDMI 19-pin female
 Connector 2: DVI-D (24+1) male
 DVI mounting with mounting thumbscrews
 DVI Dual Link occupancy (24+1)
 Sealed plastic hood
 Gold plated contacts
 Supports HDTV and HD ready

DVI to HDMI Adapter AH0002
 Connector 1: HDMI 19-pin male
 Connector 2: DVI-D (24+1) female
 DVI mounting with mounting thumbscrews
 DVI Dual Link occupancy (24+1)
 Sealed plastic hood
 Gold plated contacts
 Supports HDTV and HD ready

Part.no. AH0001 / HDMI to DVI

Part.no. AH0002 / DVI to HDMI

DVI / VGA Adapter



AD0001

AD0002

DVI to VGA Adapter AD0001
 Connector 1: HD DSUB 15-pin female
 Connector 2: DVI-I (24+5) male
 Fixings with thumbscrews
 Sealed plastic hood
 Gold plated contacts
 Supports High Density resolutions

VGA to DVI Adapter AD0002
 Connector 1: HD DSUB 15-pin male
 Connector 2: DVI-I (24+5) female
 Fixings with thumbscrews
 Sealed plastic hood
 Gold plated contacts
 Supports High Density resolutions

Part.no. AD0001 / DVI to VGA

Part.no. AD0002 / VGA to DVI

VGA Cable



VGA cable
2x HD-DSUB 15-pin male
3x Coax for RGB & 7x AWG 28 signal wires
Transmission of video data
Cable with 2x ferrite core
Double shielded
Standardized according to UL-2919
Cable Gauge: AWG 28

Part.no. CV0001 / 1.80 m

Part.no. CV0002 / 3 m

Part.no. CV0003 / 5 m

Part.no. CV0016 / 10 m

Part.no. CV0017 / 15 m

Part.no. CV0018 / 20 m

VGA Cable



VGA cable
2x HD-DSUB 15-pin male
Transmission of video data
Cable with 2x ferrite core
Single shielded
Cable Gauge: AWG 28
Color: Beige

Part.no. CV0034 / 1.80 m

Part.no. CV0026 / 3 m

Part.no. CV0027 / 5 m

Part.no. CV0028 / 10 m

VGA Extension Cable



VGA extension cable
HD-DSUB 15-pin male / female
3x Coax for RGB & 7x AWG 28 signal wires
Transmission of video data
Cable with 2x ferrite core
Double shielded
Standardized according to UL-2919
Cable Gauge: AWG 28

Part.no. CV0004 / 1.80 m

Part.no. CV0005 / 3 m

Part.no. CV0006 / 5m

Part.no. CV0019 / 10 m

Part.no. CV0021 / 15 m

Part.no. CV0022 / 20 m

VGA Extension Cable



VGA extension cable
HD-DSUB 15-pin male / female
Transmission of video data
Cable with 2x ferrite core
Single shielded
Cable Gauge: AWG 28
Color: Beige

Part.no. CV0035 / 1.80 m

Part.no. CV0024 / 3 m

Part.no. CV0025 / 5 m

Part.no. CV0023 / 10 m

RS232 Null Modem Cable



Modem cable
Connector 1: D-SUB 9-pin female
Connector 2: D-SUB 9-pin female
Occupation: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9
Shielded cable with snap caps
Cable Gauge: AWG 28
Cable length: 2 m

Part.no. CC0006 / 2 m

USB 2.0 Docking Station

LogiLink®



USB 2.0 Docking Station
Connector 1: USB Typ A male
Connector 2: USB Typ A female
Max. transfer rate: 480 Mbps
Double shielded
Standardized according to UL-2725
Cable Gauge: AWG 28
Cable length: 1.50 m

Part.no. CU0013A / 1.50 m

USB 2.0 Cable



USB 2.0 cable
 Connector 1: USB Typ A male
 Connector 2: USB Typ B male
 Max. transfer rate: 480 Mbps
 Double shielded
 Standardized according to UL-2725
 Cable Gauge: AWG 30

Part.no. CU0007 / 2 m

Part.no. CU0008 / 3 m

Part.no. CU0009 / 5 m

USB 2.0 Extension Cable



USB 2.0 extension cable
 Connector 1: USB Typ A male
 Connector 2: USB Typ A female
 Max. transfer rate: 480 Mbps
 Double shielded
 Standardized according to UL-2725
 Cable Gauge: AWG 30

Part.no. CU0010 / 2 m

Part.no. CU0011 / 3 m

Part.no. CU0012 / 5 m

USB 3.0 Cable



USB 3.0 cable
 Connector 1: USB 3.0 Typ A male
 Connector 2: USB 3.0 Typ A male
 3x shielded cable
 Backwards compatible with USB 2.0
 Max. data transfer rate: 5Gbps
 Standardized according to UL-2725
 Cable Gauge: AWG 30
 Color: black

Part.no. CU0023 / 2 m

Part.no. CU0024 / 3 m

Part.no. CU0025 / 5 m

USB 2.0 Mini Cable 5-pin



USB 2.0 Mini Cable
 Connector 1: USB Typ A male
 Connector 2: USB Mini 5-pin male
 Max. data transfer rate: 480 Mbps
 Double shielded
 Standardized according to UL-2725
 Cable Gauge: AWG 28

Part.no. CU0014 / 2 m

Part.no. CU0015 / 3 m

USB 2.0 Mini Cable 4-pin MITSUMI



USB 2.0 Mini cable MITSUMI
 Connector 1: USB Typ A male
 Connector 2: USB Mini 4-pin male
 4-pin MITSUMI male
 Max. data transfer rate: 480 Mbps
 Double shielded
 Standardized according to UL-2725
 Cable Gauge: AWG 28

Part.no. CU0016 / 2 m

Part.no. CU0017 / 3 m

USB 2.0 Mini Cable 5-pin HIROSE



USB 2.0 Mini cable HIROSE
 Connector 1: USB Typ A male
 Connector 2: USB Mini 5-pin male
 5-pin HIROSE male
 Max. data transfer rate: 480 Mbps
 Double shielded
 Standardized according to UL-2725
 Cable Gauge: AWG 28

Part.no. CU0018 / 2 m

Part.no. CU0019 / 3 m

IEEE 1394a 6M-6M Cable



IEEE 1394a cable
 Connector 1: IEEE 1394a 6-pin male
 Connector 2: IEEE 1394a 6-pin male
 Max. data transfer rate: 400 Mbps
 Double shielded
 Standardized according to UL-20276
 Cable Gauge: AWG 28

Part.no. CF0001 / 1.80 m

Part.no. CF0002 / 3 m

Part.no. CF0003 / 5 m

IEEE 1394a 6M-4M Cable



IEEE 1394a cable
 Connector 1: IEEE 1394a 6-pin male
 Connector 2: IEEE 1394a 4-pin male
 Max. data transfer rate: 400 Mbps
 Double shielded
 Standardized according to UL-20276
 Cable Gauge: AWG 28

Part.no. CF0004 / 1.80 m

Part.no. CF0005 / 3 m

Part.no. CF0006 / 5 m

IEEE 1394a 4M-4M Cable




IEEE 1394a Cable
 Connector 1: IEEE 1394a 4-pin male
 Connector 2: IEEE1394a 4-pin male
 Max. data transfer rate: 400 Mbps
 Double shielded
 Standardized according to UL-20276
 Cable Gauge: AWG 28

Part.no. CF0007 / 1.80 m

Part.no. CF0008 / 3 m

Part.no. CF0009 / 5 m


SATA Power Adapter



Internal Power Adapter SATA
 Connector 1: 15-Pin SATA
 Connector 2: 5.25" male
 Plug with mounting system
 4-pin cable
 Standardized according to UL-1007
 Cable Gauge: AWG 18
 Cable length: 0.15 m

Part.no. CS0003 / 0.15 m


5.25" Y-Power Cable



Internal Y-Power cable
 Connector 1: 5.25" male
 Connector 2+3: 2x 5.25" female
 Plug with mounting system
 4-pin cable
 Standardized according to UL-1007
 Cable Gauge: AWG 18
 Cable length: 0.20 m

Part.no. CP0001 / 0.2 m

3.5" Y-Power Cable



Internal Y-Power cable
 Connector 1: 5.25" male
 Connector 2+3: 2x 3.5" female
 Plug with mounting system
 4-pin cable
 Standardized according to UL-1007
 Cable Gauge: AWG 18
 Cable length: 0.20 m

Part.no. CP0002 / 0.2 m

SATA Cable



Internal SATA cable
 Connector 1: SATA male
 Connector 2: SATA male
 Plug with securing strap
 Max. data transfer rate: 300 Mbps
 7-pin cable
 Standardized according to UL-2725
 Cable Gauge: AWG 26
 Cable length: 0.50 m, 0.75 m



Part.no. CS0009 / 0.3 m

Part.no. CS0001 / 0.5 m

Part.no. CS0002 / 0.75 m

Part.no. CS0008 / 0.9 m

e-SATA Cable



External serial ATA cable
 Connector 1: e-SATA male
 Connector 2: e-SATA male
 Plug with securing strap
 Max. data transfer rate: 300 Mbps
 7-pin cable
 Standardized according to UL-2725
 Cable Gauge: AWG 26

Part.no. CS0010 / 0.75 m

Part.no. CS0004 / 1.00 m

Part.no. CS0011 / 1.50 m

SATA Y-Power Adapter



Internal power adapter SATA
 Connector 1+2: 15-pin SATA
 Connector 3: 5.25" male
 Plugs with mounting system
 4-pin cable
 Standardized according to UL-1007
 Cable Gauge: AWG 28
 Cable length: 0.15 m

Part.no. CS0007 / 0.15 m

SATA to e-SATA Cable with Bracket 1-Port



Bracket with 1x e-SATA port
 Internal Connector: 1x SATA male
 External Connector: 1x e-SATA female
 Plug with securing strap
 Max. data transfer rate: 300 Mbps
 7-pin cable

Part.no. CS0005

SATA to e-SATA Cable with Bracket 2-Port



Slotblech mit 2x e-SATA Port
 Internal Connector: 2x SATA male
 External Connector: 2x e-SATA female
 Plugs with securing strap
 Max. data transfer rate: 300 Mbps
 7-pin cable

Part.no. CS0006

Power Cable



Power cable
 Plug CEE-7VII
 Schuko plug: 90 degree angled
 Socket EN 320-C13
 Cable H05VV-F3G
 Profile: 3x 0.75 mm²
 Double Protection Contact
 VDE approved for 250v, 10/16A
 Cable length: 1.80 m

Part.no. CP090 / 1.80 m



Power Cable



Power cable
 Plug CEE-7VII
 Schuko plug: 90 degree angled
 Socket EN 320-C13
 Cable H05VV-F3G
 Profile: 3x 0.75 mm²
 Double Protection Contact
 VDE approved for 250v, 10/16A
 Cable length: 3 m

Part.no. CP095 / 3 m

Power Extension Cable



Power Extension Cable
 Straight plug (male)
 Straight socket (female)
 Socket EN 320-C13
 Cable H05VV-F3G
 Profile: 3x 0.75 mm²
 Double Protection Contact
 VDE approved for 250v, 10/16A
 Cable length: 1.80 m

Part.no. CP091 / 1.80 m

Euro 8 Power Cable



Power cable
 Power plug EN 50075
 Power plug: straight
 Euro 8 socket EN 60320 C7
 Cable H03 VV H2-Fs
 Profile: 2x 0,75mm²
 VDE approved for 250v, 2,5A
 Cable length: 1.80 m

Part.no. CP092 / 1.80 m


Power Cable for Notebook Power Supplies



Power cable
 Power plug CEE-7VII
 Schuko plug: straight
 Device jack EN 320-C5
 Cable H05VV-F3G
 Profile: 3x 0,75mm²
 Double Protection Contact
 VDE approved for 250v, 10/16A
 Cable length: 1.80 m

Part.no. CP093 / 1.80 m

Your notes



LogiLink®

Computer & Network Accessories

LogiLink convinces with a large portfolio of computer and network products and is the result of the combination of key technologies, continuous innovation, award-winning designs and an excellent price-performance ratio.



The brand

LogiLink was registered as a trade mark in 1988 and is protected by copyright in 37 countries. 2direct has taken over the name in 2006 for own use with a new concept and product portfolio.



The concept

The LogiLink range consists of a carefully selected portfolio of top products of computer and network technology. The product range is constantly expanded and kept up to date. More product groups are scheduled.



The packaging

The complex LogiLink retail packaging is easy to recognize and supports in combination with the attractive design your sales success. The product descriptions and short instructions are multilingual.



Our Promise

With LogiLink we will always offer attractive high quality products at competitive prices. The offered products are innovative and reflect the current state of the art. Customer satisfaction is our highest goal.



Our Support

With specially developed sales strategies we give you the ability of combining different articles of the LogiLink product range fitting into your markets and your target customers. Ask us for a personal offer.



Our Service

A good support belongs to a complete concept. We support you and your customers with drivers, the solution of technical problems via Internet or our technical hotline. Our support does not end after sales.

2direct GmbH
Wefelshohler Strasse 44
58511 Lüdenscheid
Fon.: +49-2351-66887-0
Fax: +49-2351-66887-29
info@2direct.de
www.2direct.de
www.LogiLink.com

2direct Asia Limited
2F, No. 413-1, Sec. 4 Ren ai Road
Taipei Taiwan
Fon.: +886-2-27008030
Fax: +886-2-27000074
www.2direct.com.tw



4260113568774