
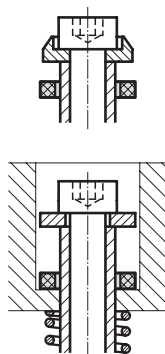


# DÄMPFUNGSSCHEIBE

2450.

Einbaubeispiel



## Werkstoff:

Polyurethan (FIBROFLEX®)

## Ausführung:

2450.6. (90 Shore A) ab Lager lieferbar

2450.5. (80 Shore A) und

2450.7. (95 Shore A) lieferbar auf Anfrage

## 2450. Dämpfungsscheibe

d <sub>1</sub>	d <sub>2</sub>	s	d <sub>1</sub>	d <sub>2</sub>	s	d <sub>1</sub>	d <sub>2</sub>	s
6,4	16	3	21	30	5	32	49	8
11	17	3	13,5	32	4	17	50	6
8,5	20	3	25	32	6	26	50	6
14	23	4	18	32	7	37	53	8
12	24	5	21	35	7	32	60	10
10,5	15	4	23,5	34	4	17	63	6
10,5	25	4	26	35	6	37	65	10
13	19	4	17	38	5	42	70	10
13	25	4	21	38	6	21	80	10
14	26	5	13,5	40	5	21	100	10
15,5	23	4	32	40	6	27	125	10
17	26	4	27	41	7			
18	27	4	31	42	6			
22	28	6	37	46	6			

## Bestell-Beispiel:

Dämpfungsscheibe	=2450.
Shore A Härte MAT	90 Shore A = 6.
Innendurchmesser d <sub>1</sub>	23.5 mm = 23.
Außendurchmesser d <sub>2</sub>	34 mm = 034.
Dicke s	4 mm = 04
Bestell-Nummer	=2450. 6. 23. 034. 04