


Specification sheet

CF 370

FAC 8X2 Rigid, double mounted trailing axle

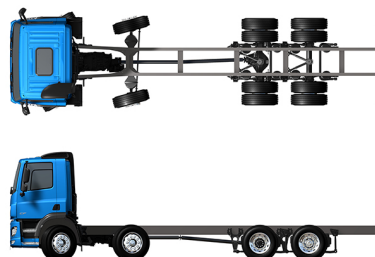

ENGINES

- CF 370 MX-11 (270 kW / 367 hp)
- CF 410 MX-11 (300 kW / 408 hp)
- CF 450 MX-11 (330 kW / 449 hp)
- CF 430 MX-13 (315 kW / 428 hp)
- CF 480 MX-13 (355 kW / 483 hp)
- CF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

33000 kg

Max. front 14000 kg

Max. rear 19000 kg

GCM²⁾

40000 kg

067F8799CAAA - 2021371 - 14-06-2021

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

02106	Sleeper Cab	09983	Fog lights
01137	Space Cab	09984	Fog lights and cornering lights
01226	Cab suspension air	06593	Skylights
01174	External sun visor green translucent	06628	One hazard beacon light at co-driver side
00847	Air horns, single set	06627	One hazard beacon light at driver side
09006	Air horns, double set	06629	Two hazard beacon lights
08020	LED head lights		

AERODYNAMICS

Optional

06776	Adjustable roof air deflector	04906	Side collars
-------	-------------------------------	-------	--------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	09933	Head lamp panel and bumper: Stone Grey
-------	--	-------	--

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch glass, manual control.

Optional

09271	Steering wheel, leather, colour black	07746	Co-driver seat: Super Air
07240	Steering wheel, leather, Exclusive	07748	Co-driver seat: Xtra Leather Air
07152	Cab interior trim colour Exclusive	00967	Seat belts red
07592	Cab interior decoration Argenta	02117	Third seat
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	06783	Lower bunk foam mattress
07736	Driver seat: Super Air	06784	Lower bunk mattress Xtra Comfort
07737	Driver seat: Xtra Leather Air	06676	PL light in cab ceiling
07741	Co-driver seat: Comfort Air	06970	Automatic Cab Climate Control
07743	Co-driver seat: Luxury Air		

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control.

Optional

09681	Preparation for Maut	09909	Adaptive Cruise Control (ACC) with FCW
08450	Luxury speaker system with 6 speakers	08023	Adaptive Cruise Control with FCW and AEBS-CM2
07117	Radio/USB player, 2 speakers	06991	Predictive Cruise Control
01100	Truck Navigation Radio, 6 speakers	06992	Predictive Cruise Control lite
07261	TruckPhone		

SAFETY AND SECURITY

No Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	09827	Side camera system
09828	Front camera system	01725	Reverse warning

SUSPENSION AND AXLES

Front axles load 8.00 + 8.00 t; Rear: 12.00 + 7.80 t, air suspension, SR1344.

Optional

06264	Front axles load 9.00 + 9.00 t	04588	Rear axle SR1347
04057	Rear axle HR1356	08191	Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Second front or leading axle: 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152	Tyre makes and types
-------	----------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1900 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

04523	Manual gearbox, 16 speeds	03720	No ASR
07103	Automated gearbox, TraXon, 16 speeds		

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921	MX Engine Brake	02715	ZF Intarder
-------	-----------------	-------	-------------

CHASSIS

Wheelbase 5.70 m / rear overhang 2.00 m; Side member height 310 mm; Standard component location; Exhaust pipe vertical, high; Steel fuel tank 300 l RH, height 580 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

06610	Exhaust pipe horizontal, low	03323	Rear light with LEDs
07070	Spare wheel carrier left-hand side		

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	04624	Closing member
08026	Trailer coupling Rockinger D=13.0	07032	D-value cross member D=20

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | | | |
|-------|--|-------|-------------------------------|
| 04331 | Appl connector including air control prep | 06692 | Application connector chassis |
| 09050 | Application connectors for bb remote control | | |

POWER TAKE-OFF (PTO)

Optional

- 16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

- | | | | |
|-------|------------------|-------|------------------------------|
| 06460 | Alternator 120 A | 07671 | Batteries 2x210Ah AGM C-type |
| 08775 | Alternator 150 A | 06440 | Batteries 2x230Ah |

GVM AND GCM

Chassis weight related technical GVM max 35000 kg; Driveline related max GCM 40000 kg class 3.

Optional

- | | | | |
|-------|--|-------|--|
| 00200 | Driveline related max GCM 38000 kg class 2 | 00939 | Driveline related max GCM 56000 kg class 2 |
| 03673 | Driveline related max GCM 44000 kg class 2 | 00818 | Driveline related max GCM 60000 kg class 3 |
| 03675 | Driveline related max GCM 50000 kg class 3 | | |

APPLICATION CONDITIONS

Air intake on the cab roof.

Optional

- 09961 Cyclonic air intake behind the cab

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle (excl. real wear parts), 2nd and 3rd year driveline up to 300,000 km and 1st year breakdown.; ITS service.

Optional



- 08311 Service interval extended



Go to DAF.com to configure your own perfect DAF.

CF 370

FAC 8X2 Rigid, double mounted trailing axle

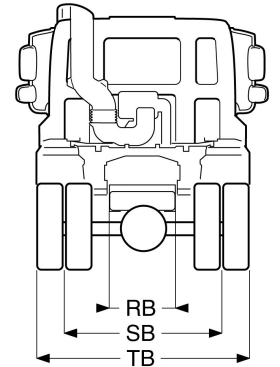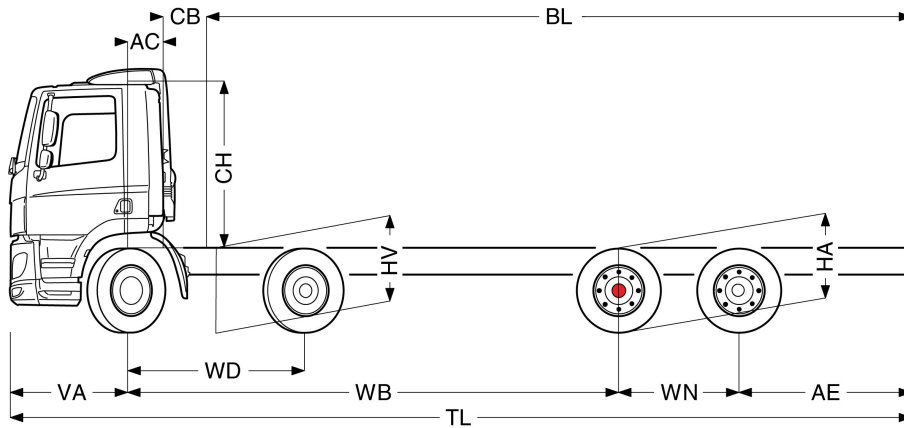

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	4,60	1,55	6171	2836	9007	7829	16164	23993	0,39	0,28	1,94	6,27	6,27	8,92	1,02	0,99	18,69	19,97
	5,00	1,75	6124	2967	9091	7876	16033	23909	0,39	0,28	1,94	6,78	6,78	9,52	1,02	0,99	19,85	21,14
	5,70	2,00	6046	3149	9194	7954	15851	23806	0,39	0,28	1,94	7,68	7,68	10,47	1,02	0,99	21,88	23,19
SLEEPER CAB	4,60	1,55	6235	2833	9068	7765	16167	23932	0,82	0,28	1,94	5,42	5,42	8,92	1,02	0,99	18,69	19,97
	5,00	1,75	6188	2964	9152	7812	16036	23848	0,82	0,28	1,94	5,94	5,94	9,52	1,02	0,99	19,85	21,14
	5,70	2,00	6109	3146	9255	7891	15854	23745	0,82	0,28	1,94	6,84	6,84	10,47	1,02	0,99	21,88	23,19
SPACE CAB	4,60	1,55	6374	2806	9180	7626	16194	23820	0,82	0,28	2,62	5,46	5,46	8,92	1,02	0,99	18,69	19,97
	5,00	1,75	6325	2939	9264	7675	16061	23736	0,82	0,28	2,62	5,98	5,98	9,52	1,02	0,99	19,85	21,14
	5,70	2,00	6243	3124	9367	7757	15876	23633	0,82	0,28	2,62	6,87	6,87	10,47	1,02	0,99	21,88	23,19

OTHER DIMENSIONS VA: 1,37 WD: 2,05 WN: 1,40 HV¹³⁾: 1,07 HV¹⁴⁾: 1,00 RB: 0,79 SB: 1,82 TB¹⁵⁾: 2,48

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle (trailing axle down).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.