




# CPT Data

Job Number 1907-0075      CPT Number C-2321SA      Location Exelon Victoria, TX  
 Operator Albert Fonseca      Date and Tin 04-Jan-2008 12:50:51      Cone Number A15F2.5CKE3S1788  
 Client MACTEC      Elevation 65.90      Water Table ND  
 Coord. North 13397149.37      Coord. East 2611182.17      Check: *[Signature]*      Verify: *[Signature]*

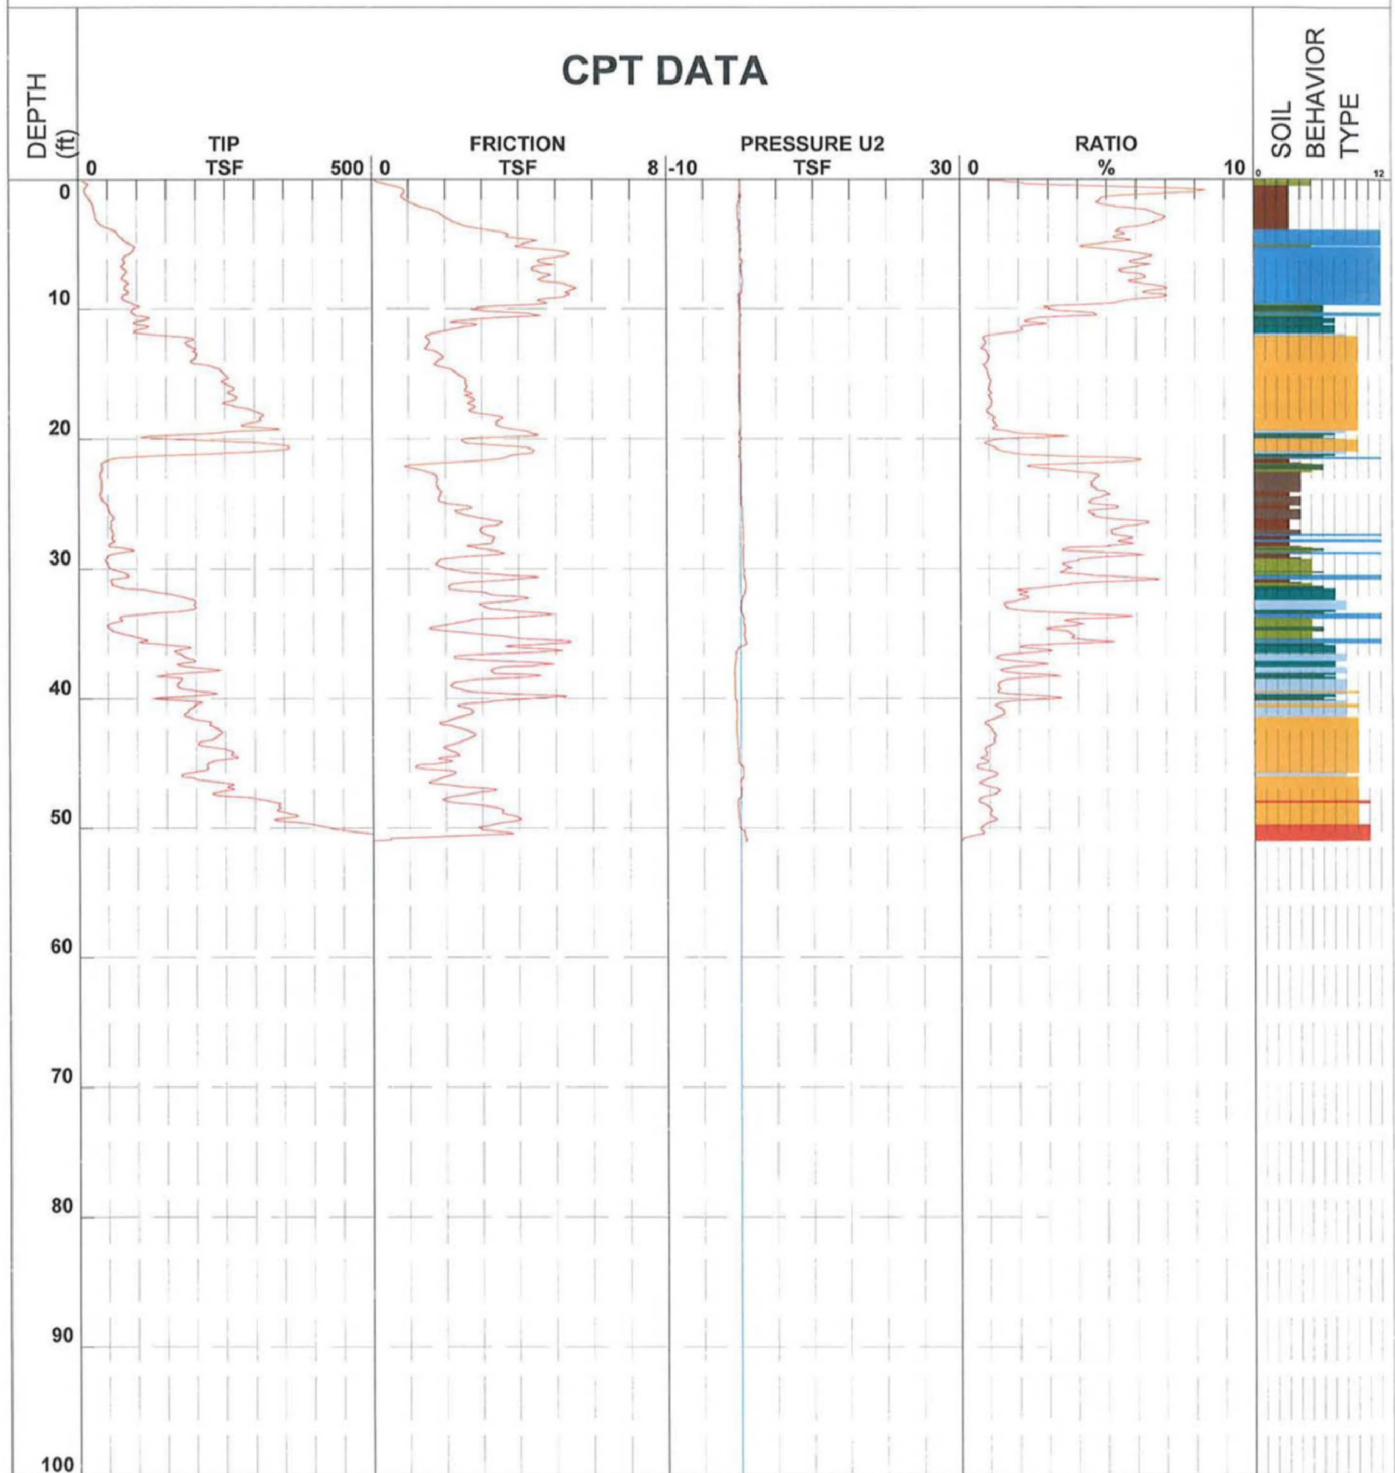


- |                              |                                 |                                |                                    |
|------------------------------|---------------------------------|--------------------------------|------------------------------------|
| ■ 1 - sensitive fine grained | ■ 4 - silty clay to clay        | ■ 7 - silty sand to sandy silt | ■ 10 - gravelly sand to sand       |
| ■ 2 - organic material       | ■ 5 - clayey silt to silty clay | ■ 8 - sand to silty sand       | ■ 11 - very stiff fine grained (*) |
| ■ 3 - clay                   | ■ 6 - sandy silt to clayey silt | ■ 9 - sand                     | ■ 12 - sand to clayey sand (*)     |



# CPT Data

Job Number 1907-0075      CPT Number C-2322      Location Exelon Victoria, TX  
 Operator Albert Fonseca      Date and Tin 10-Jan-2008 08:17:04      Cone Number A15F2.5CKE3S1788  
 Client MACTEC      Elevation 62.19      Water Table ND  
 Coord. North 13400701.15      Coord. East 2615409.91      Check: SG Verify: ly

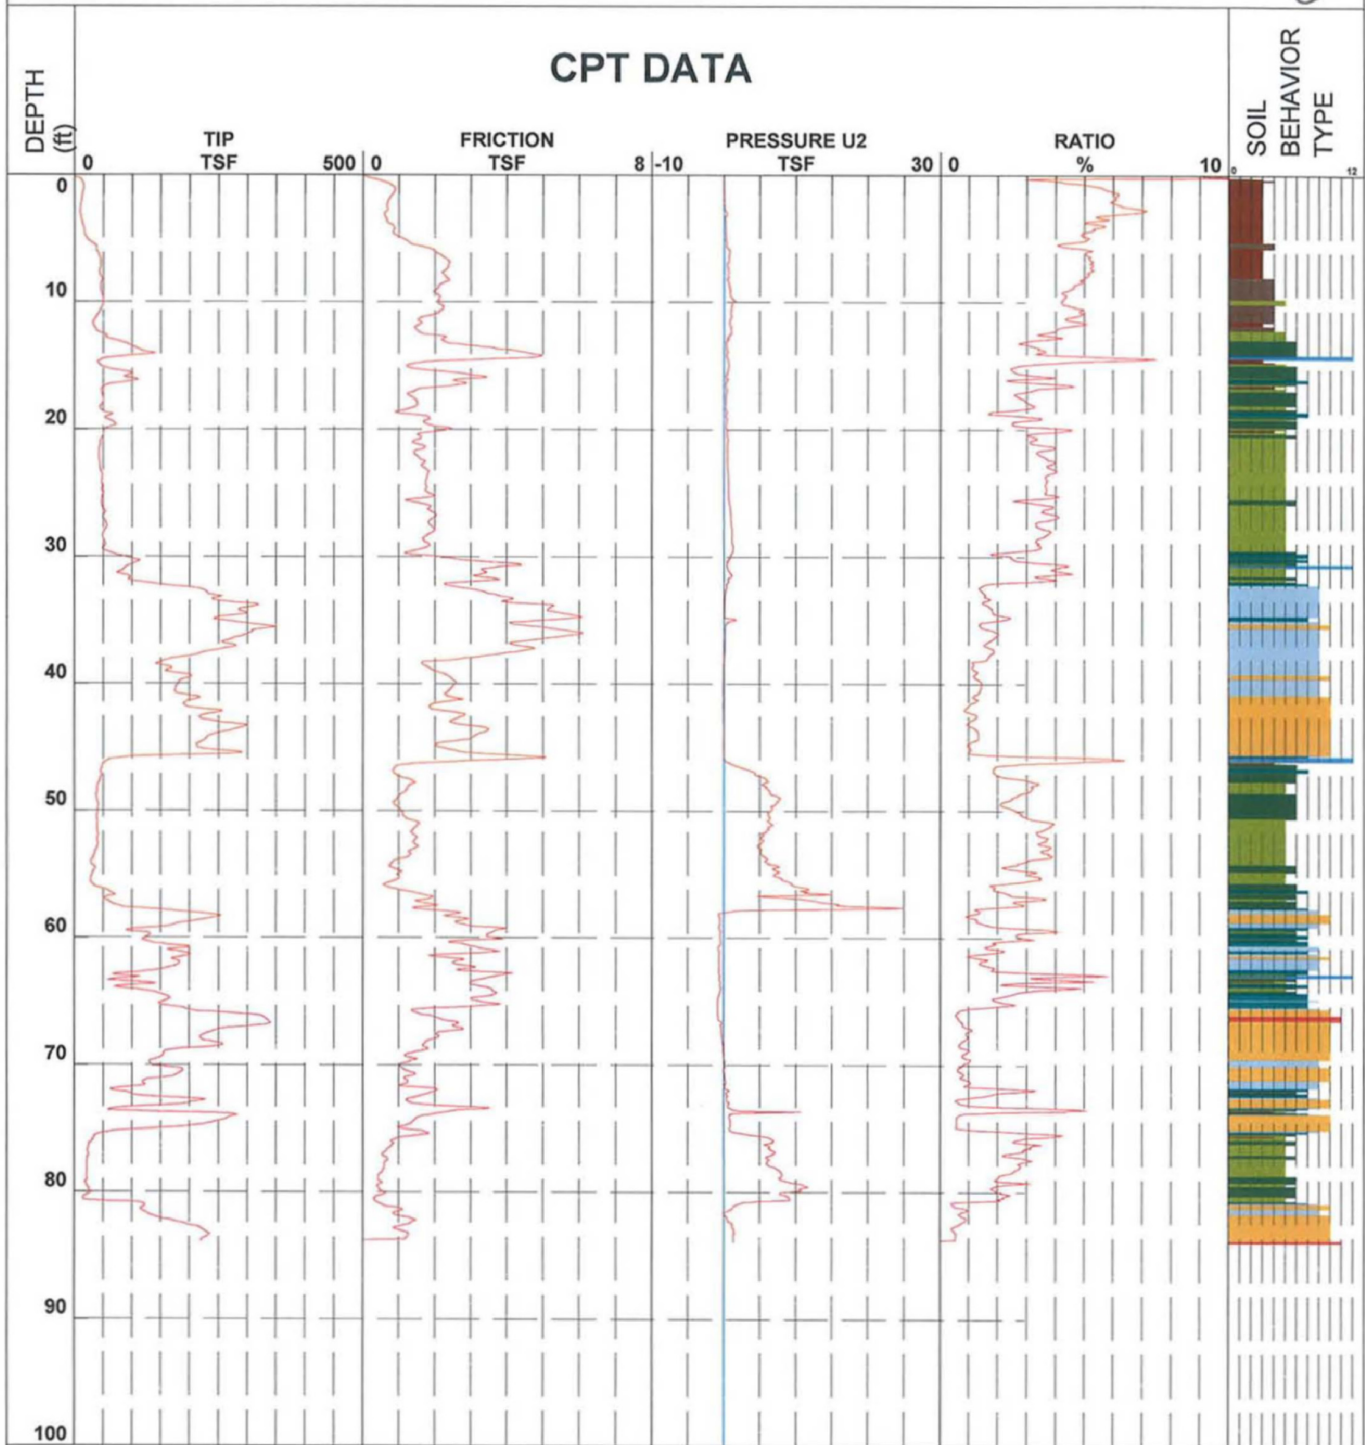


- |                              |                                 |                                |                                    |
|------------------------------|---------------------------------|--------------------------------|------------------------------------|
| ■ 1 - sensitive fine grained | ■ 4 - silty clay to clay        | ■ 7 - silty sand to sandy silt | ■ 10 - gravelly sand to sand       |
| ■ 2 - organic material       | ■ 5 - clayey silt to silty clay | ■ 8 - sand to silty sand       | ■ 11 - very stiff fine grained (*) |
| ■ 3 - clay                   | ■ 6 - sandy silt to clayey silt | ■ 9 - sand                     | ■ 12 - sand to clayey sand (*)     |





# CPT Data - DISREGARD

Job Number 1907-0075      CPT Number C-2323s      Location Exelon Victoria-TX  
 Operator Albert Fonseca      Date and T 08-Jan-2008      12:39:36      Cone Number A15F2.5CKE3S1788  
 Client MACTEC      Elevation ND      Water Table ND  
 Coord. North ND      Coord. East ND      Check:      Verify:

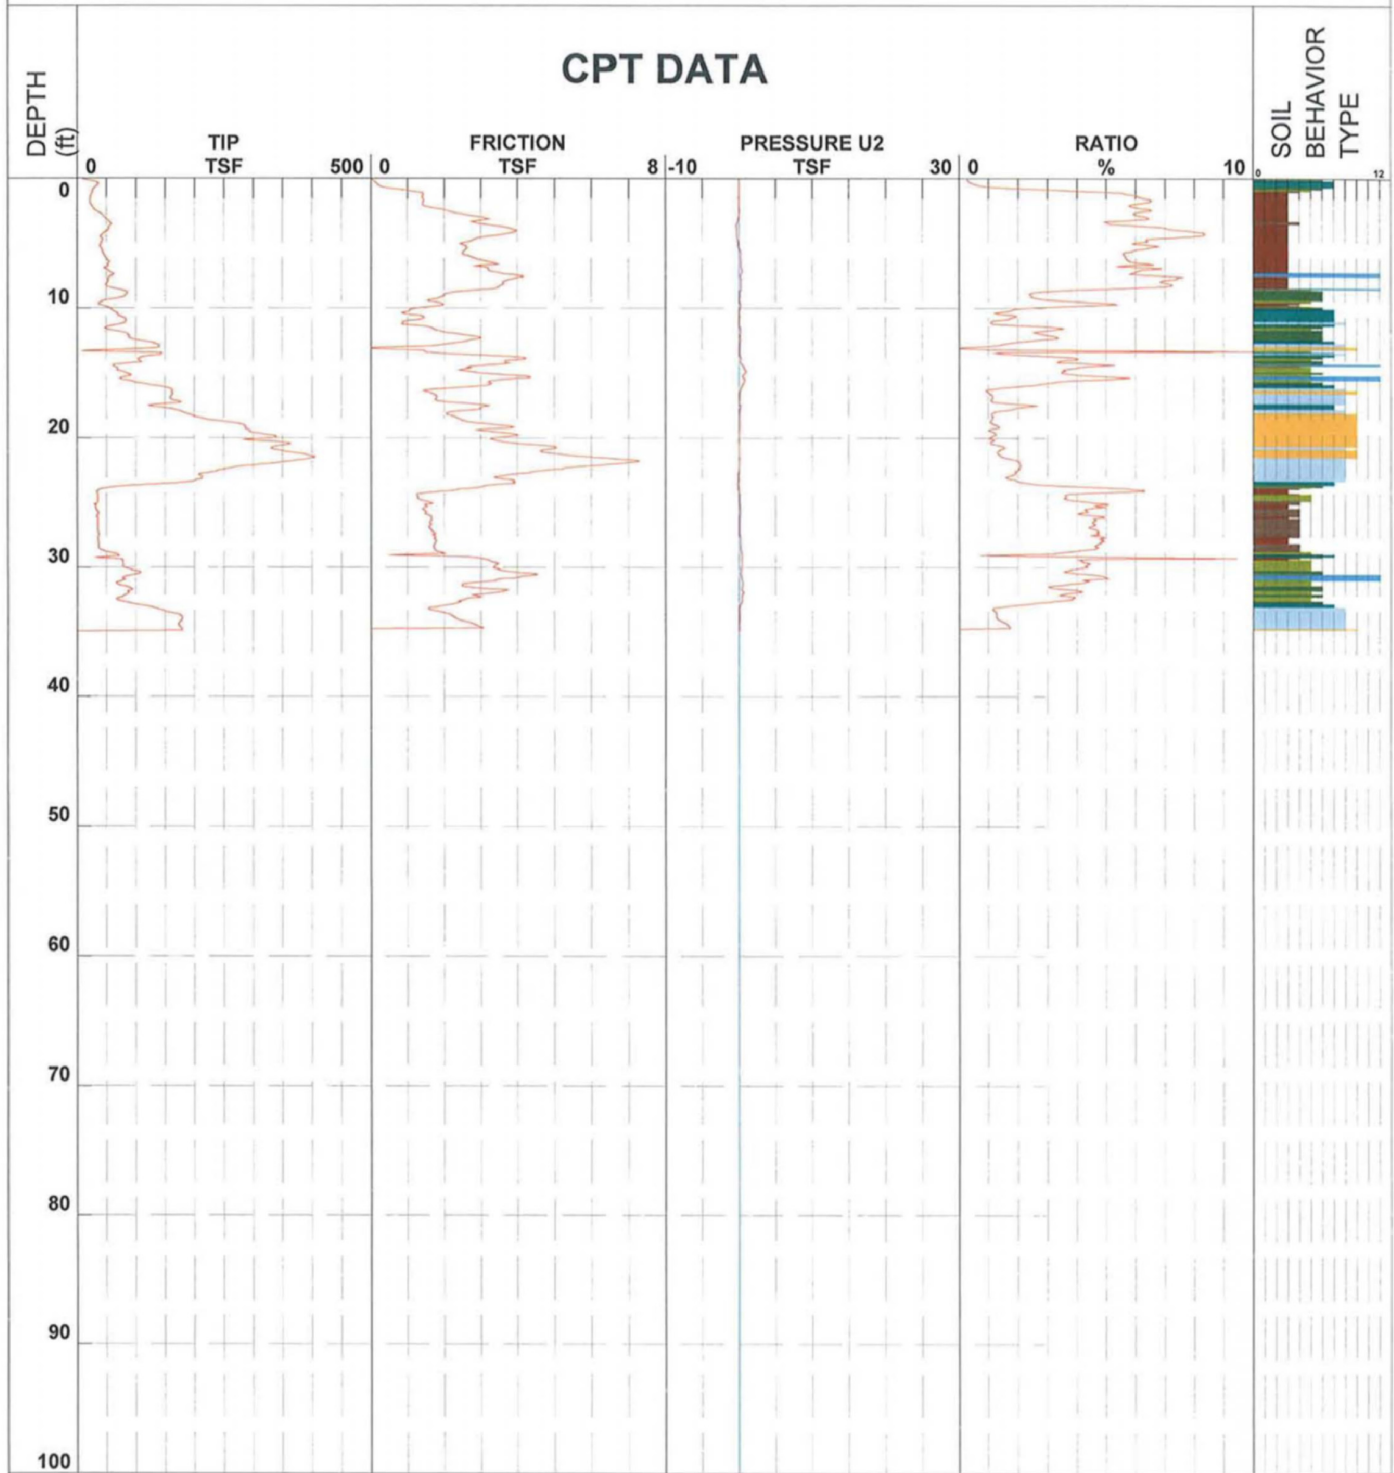


- |                              |                                 |                                |                                    |
|------------------------------|---------------------------------|--------------------------------|------------------------------------|
| ■ 1 - sensitive fine grained | ■ 4 - silty clay to clay        | ■ 7 - silty sand to sandy silt | ■ 10 - gravelly sand to sand       |
| ■ 2 - organic material       | ■ 5 - clayey silt to silty clay | ■ 8 - sand to silty sand       | ■ 11 - very stiff fine grained (*) |
| ■ 3 - clay                   | ■ 6 - sandy silt to clayey silt | ■ 9 - sand                     | ■ 12 - sand to clayey sand (*)     |



# CPT Data


Job Number 1907-0075      CPT Number C-2323SA      Location Exelon Victoria-TX  
 Operator Albert Fonseca      Date and T 09-Jan-2008 08:23:49      Cone Number A15F2.5CKE3S1788  
 Client MACTEC      Elevation 65.67      Water Table ND  
 Coord. North 13404257.20      Coord. East 2619650.56      Check: *[Signature]*      Verify: *[Signature]*

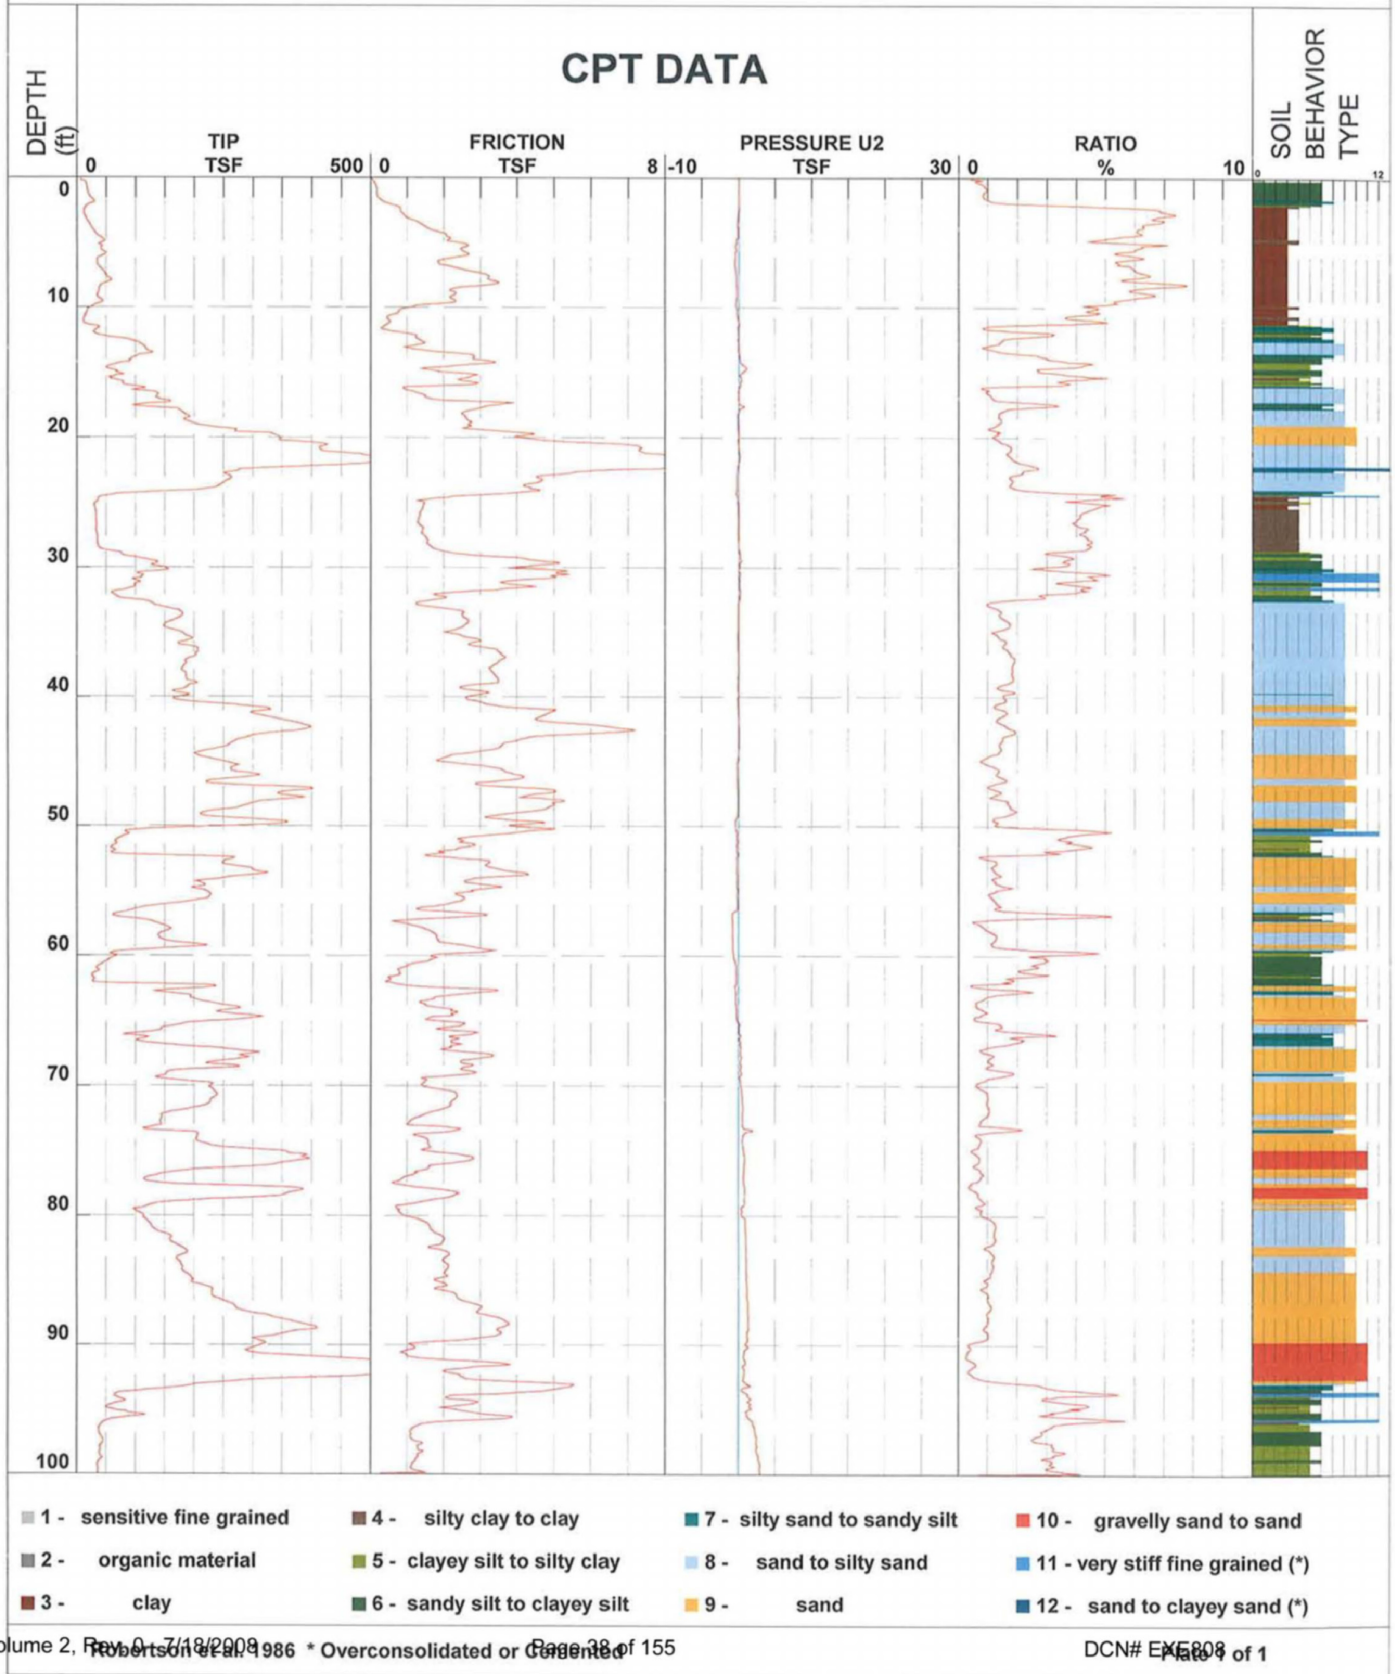



# CPT Data

Job Number 1907-0075      CPT Number C-2324      Location Exelon Victoria, TX  
 Operator Albert Fonseca      Date and Time 20-Dec-2007 13:58:43      Cone Number A15F2.5CKE3S1788  
 Client MACTEC      Elevation 63.58      Water Table ND  
 Coord. North 13406320.31      Coord. East 2622094.07      Check: SG Verify: Ry

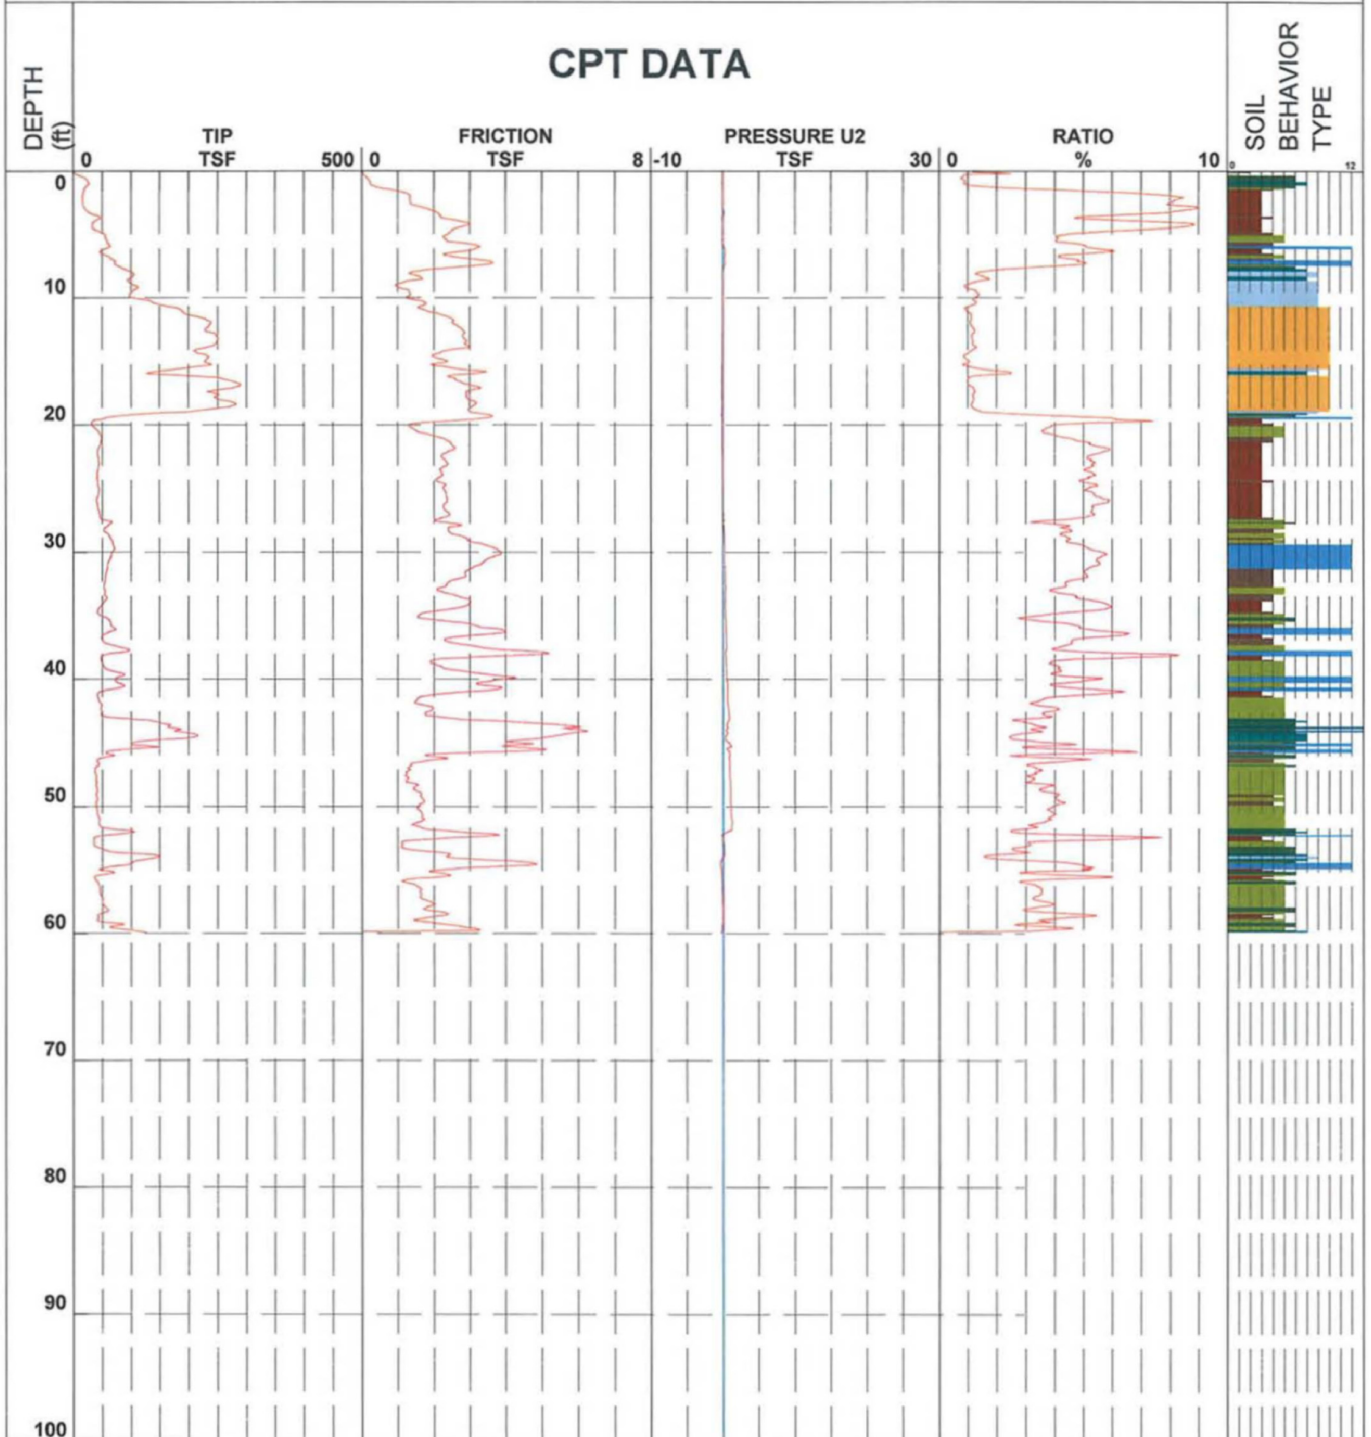


- |                              |                                 |                                |                                    |
|------------------------------|---------------------------------|--------------------------------|------------------------------------|
| ■ 1 - sensitive fine grained | ■ 4 - silty clay to clay        | ■ 7 - silty sand to sandy silt | ■ 10 - gravelly sand to sand       |
| ■ 2 - organic material       | ■ 5 - clayey silt to silty clay | ■ 8 - sand to silty sand       | ■ 11 - very stiff fine grained (*) |
| ■ 3 - clay                   | ■ 6 - sandy silt to clayey silt | ■ 9 - sand                     | ■ 12 - sand to clayey sand (*)     |






# CPT Data

Job Number 1907-0075      CPT Number C-2328      Location Exelon Victoria, TX  
 Operator Albert Fonseca      Date and Tin 04-Jan-2008 08:20:00      Cone Number F7.5CKEW2/B 1498  
 Client MACTEC      Elevation 65.62      Water Table ND  
 Coord. North 13395274.28      Coord. East 2609720.08      Check: *gf* Verify: *fy*

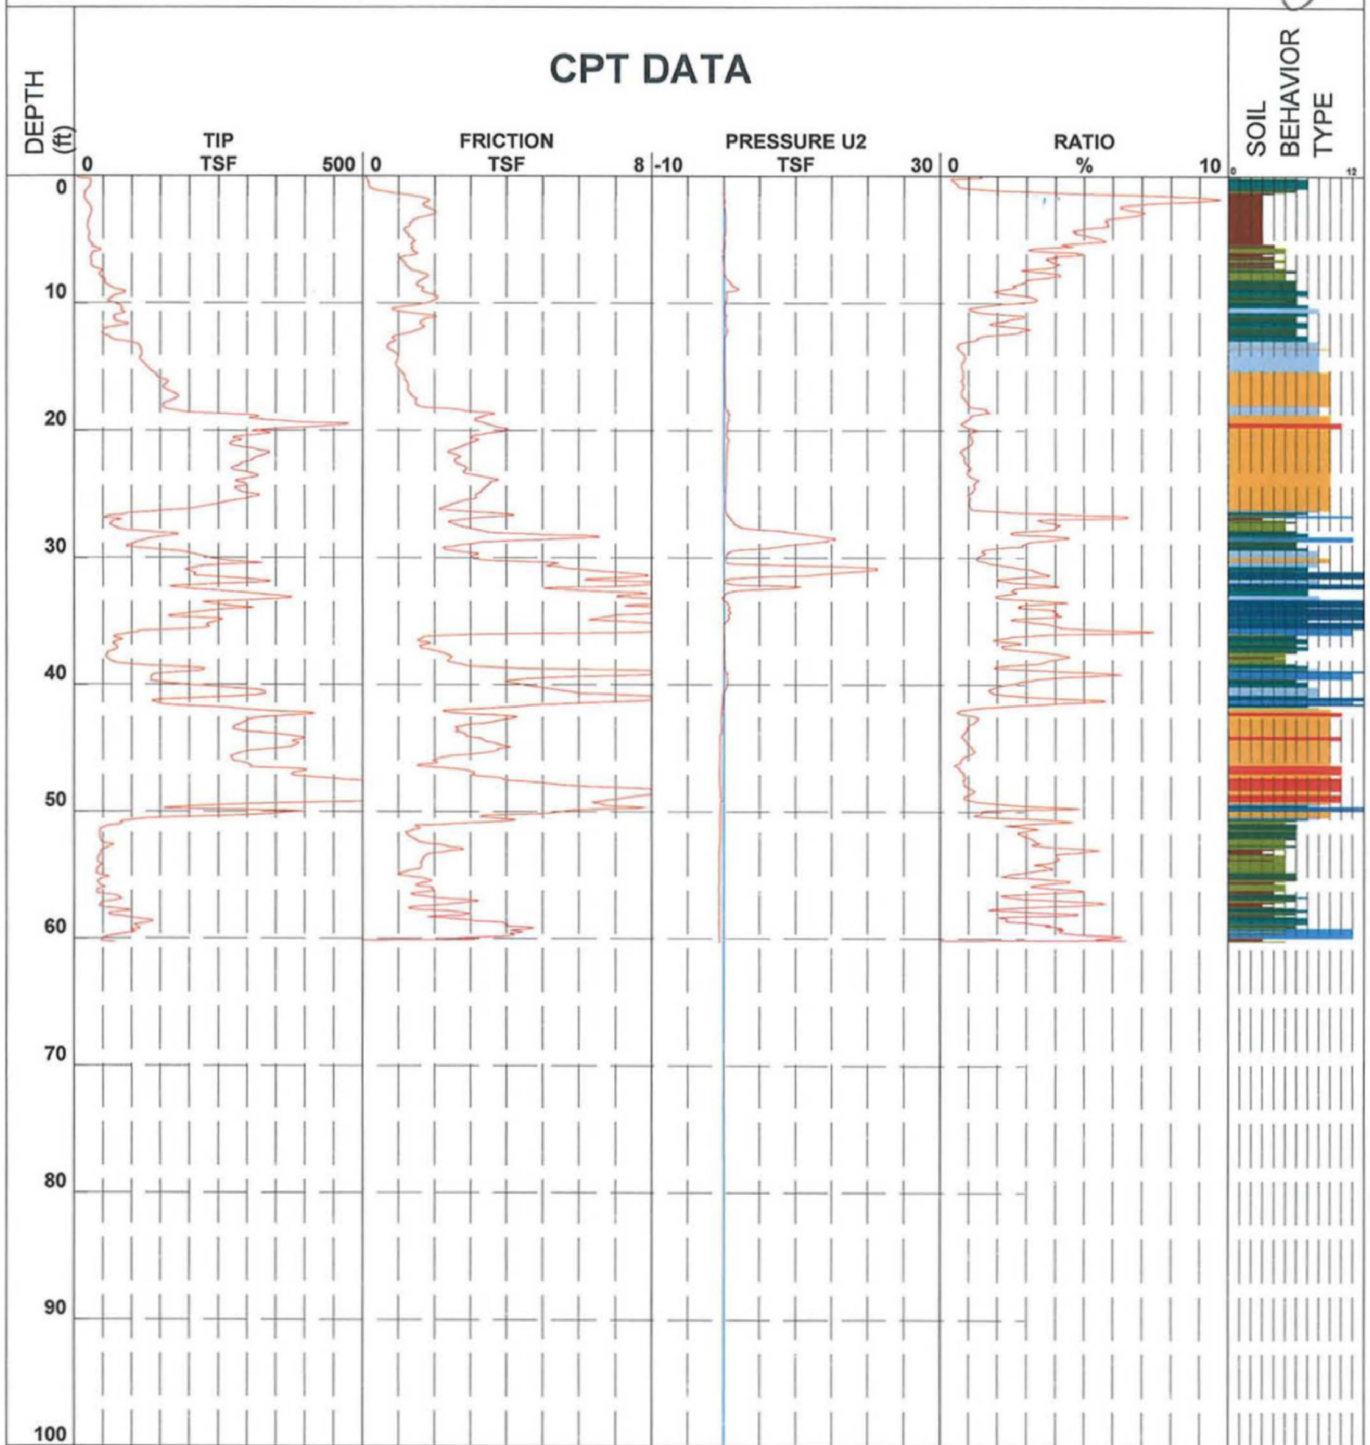

- |                              |                                 |                                |                                    |
|------------------------------|---------------------------------|--------------------------------|------------------------------------|
| ■ 1 - sensitive fine grained | ■ 4 - silty clay to clay        | ■ 7 - silty sand to sandy silt | ■ 10 - gravelly sand to sand       |
| ■ 2 - organic material       | ■ 5 - clayey silt to silty clay | ■ 8 - sand to silty sand       | ■ 11 - very stiff fine grained (*) |
| ■ 3 - clay                   | ■ 6 - sandy silt to clayey silt | ■ 9 - sand                     | ■ 12 - sand to clayey sand (*)     |

# DISSIPATIONS

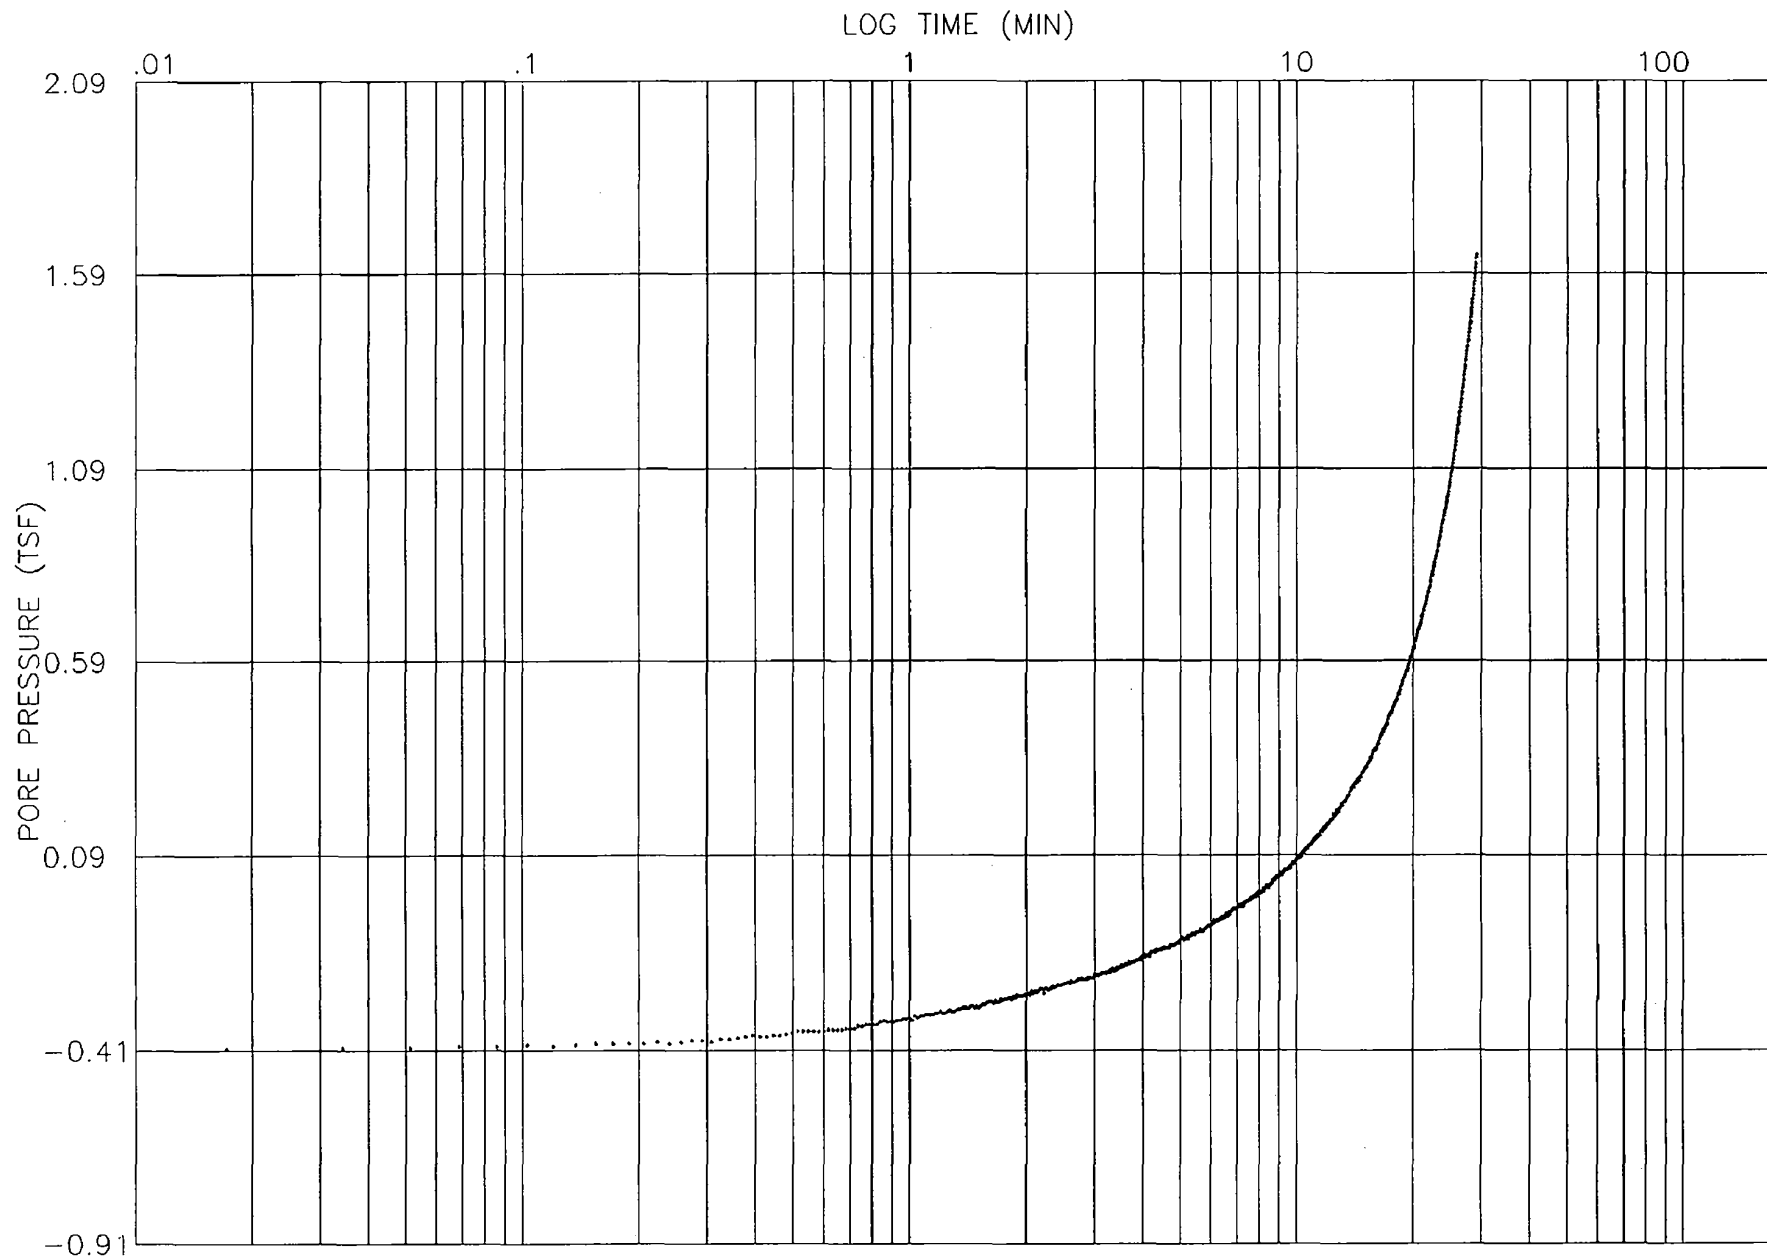


CPT NUMBER: C-2303s  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 80.1 FEET  
DATE: 18-Dec-2007



LOG TIME (MIN)

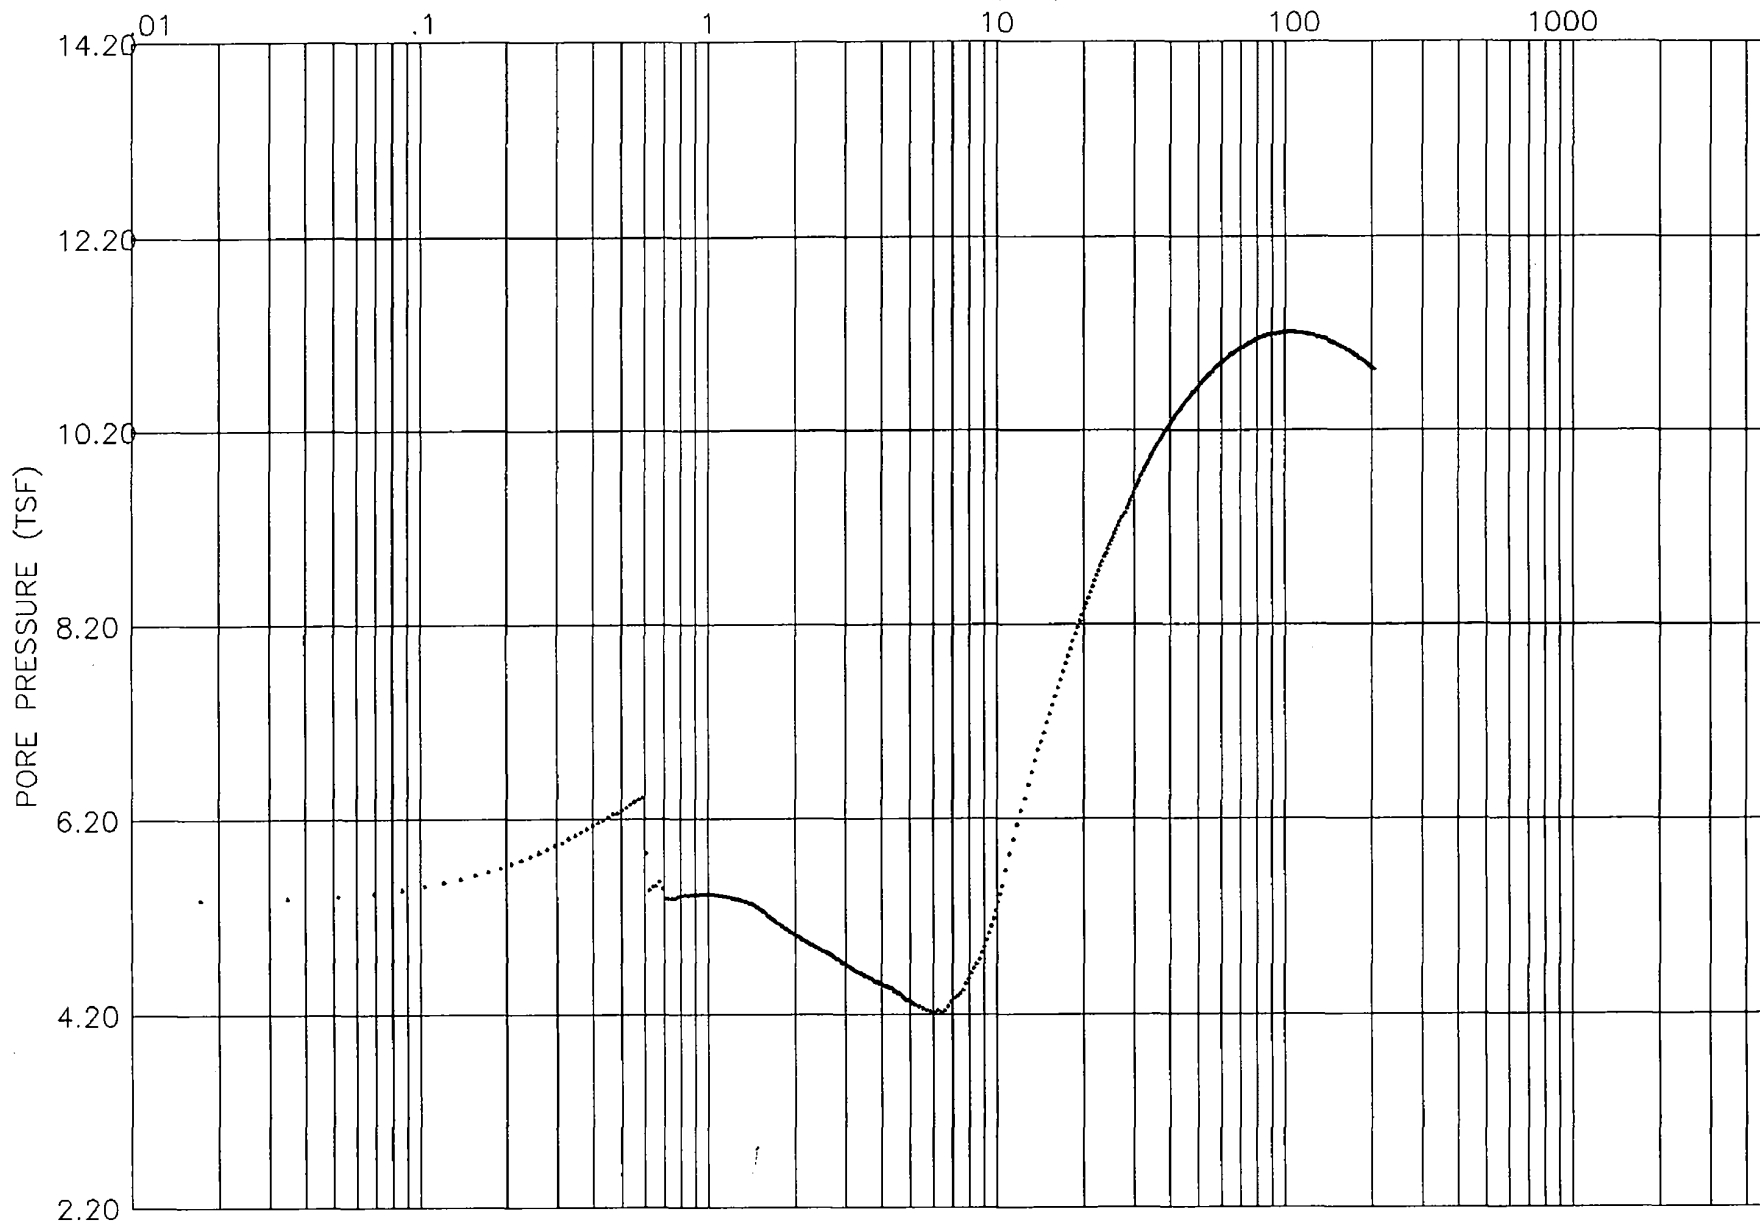


CPT NUMBER: C-2303s  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 82.3 FEET  
DATE: 18-Dec-2007


LOG TIME (MIN)

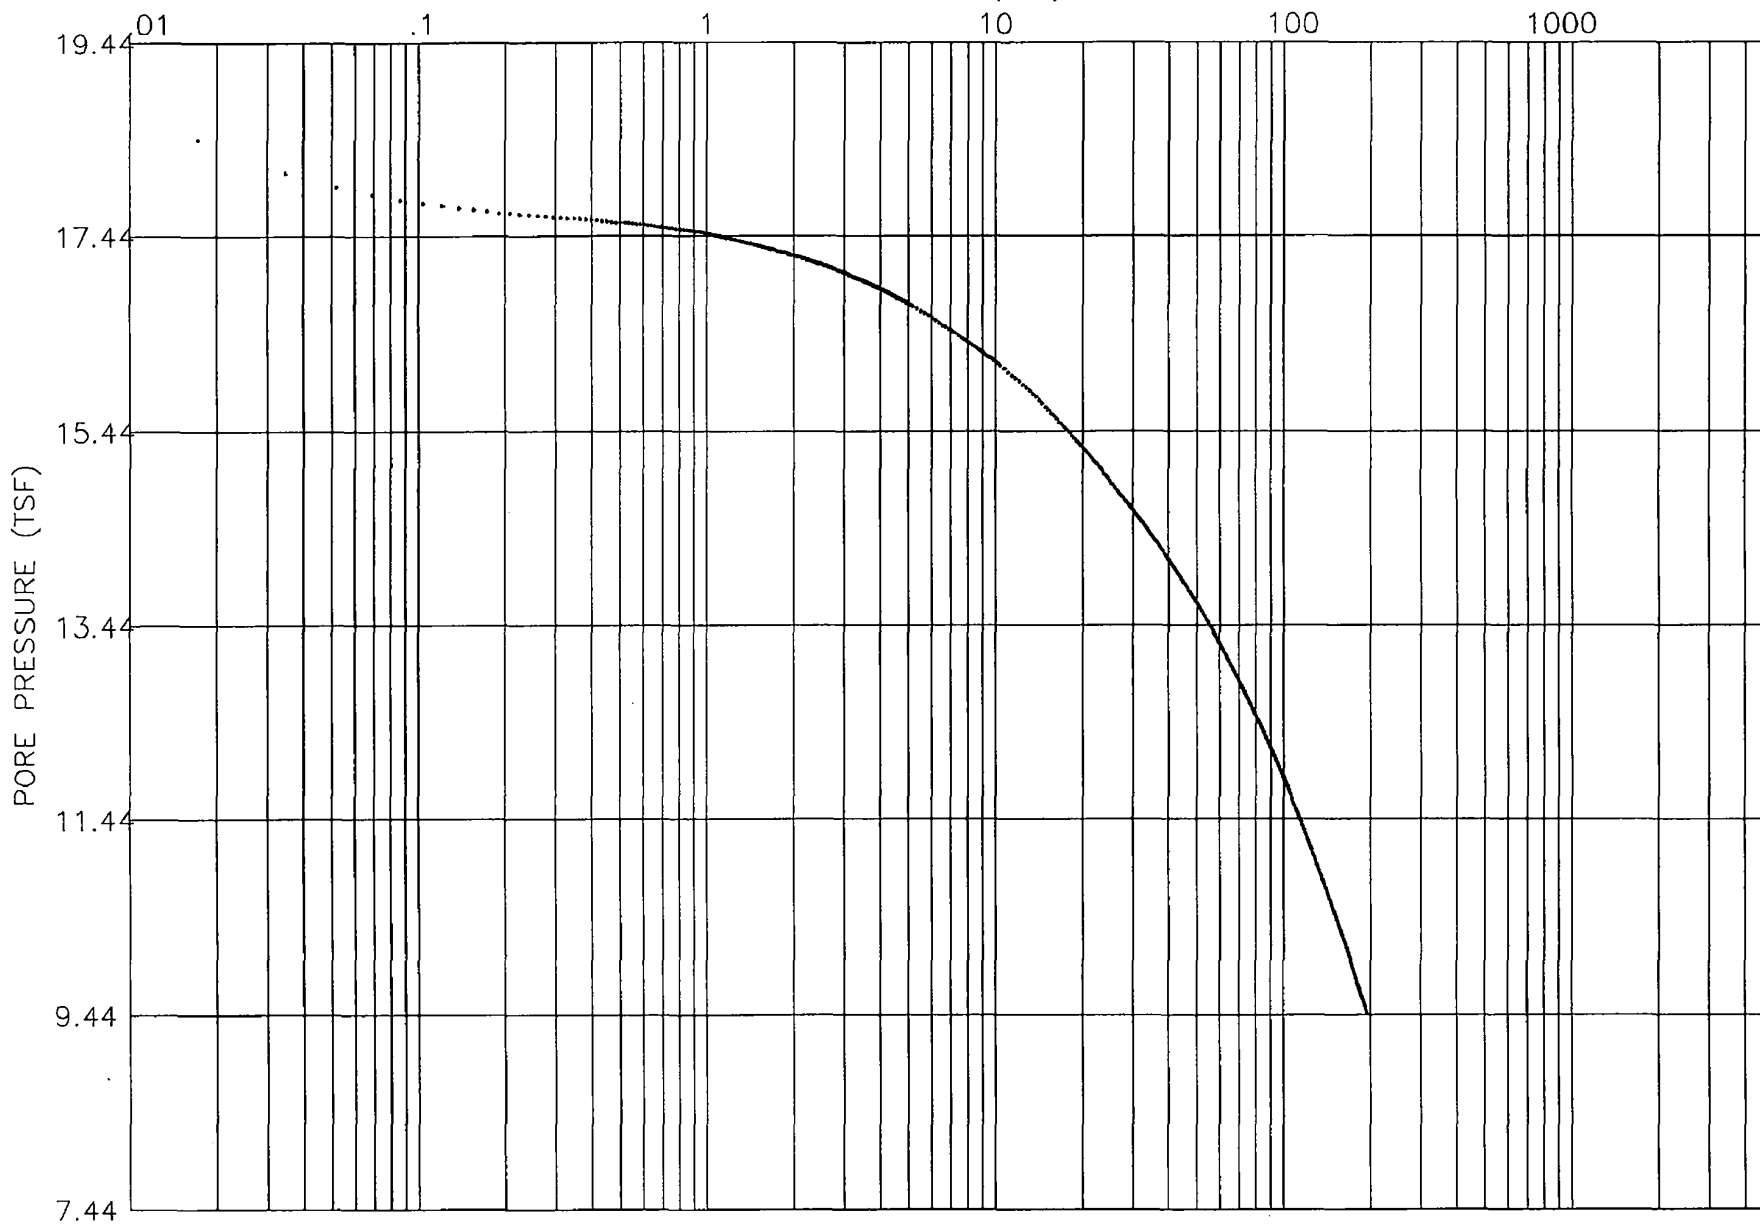

CPT NUMBER: C-2303s  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 95.6 FEET  
DATE: 18-Dec-2007

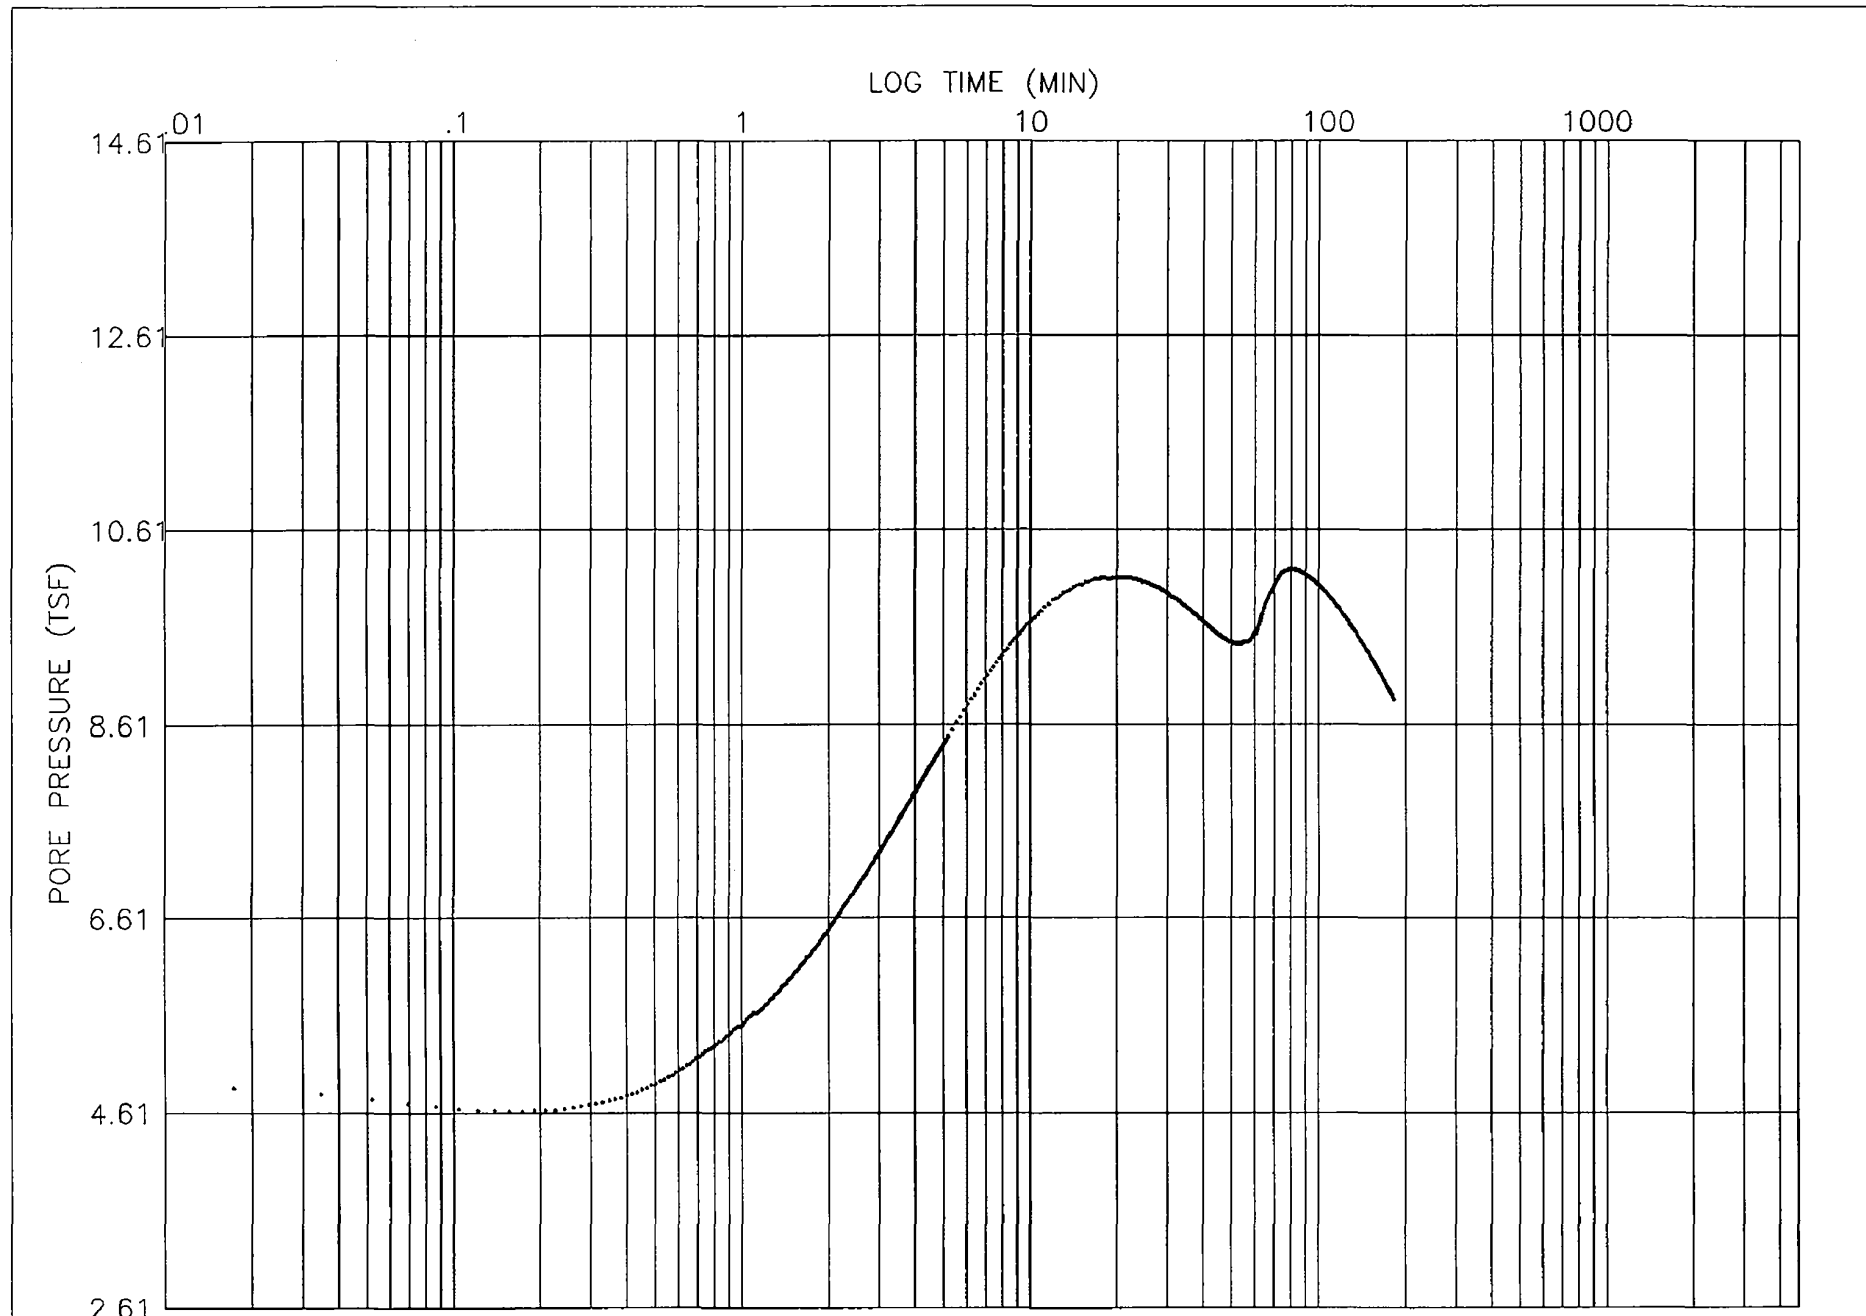


CPT NUMBER: C-2311  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 58.0 FEET  
DATE: 06-Jan-2008



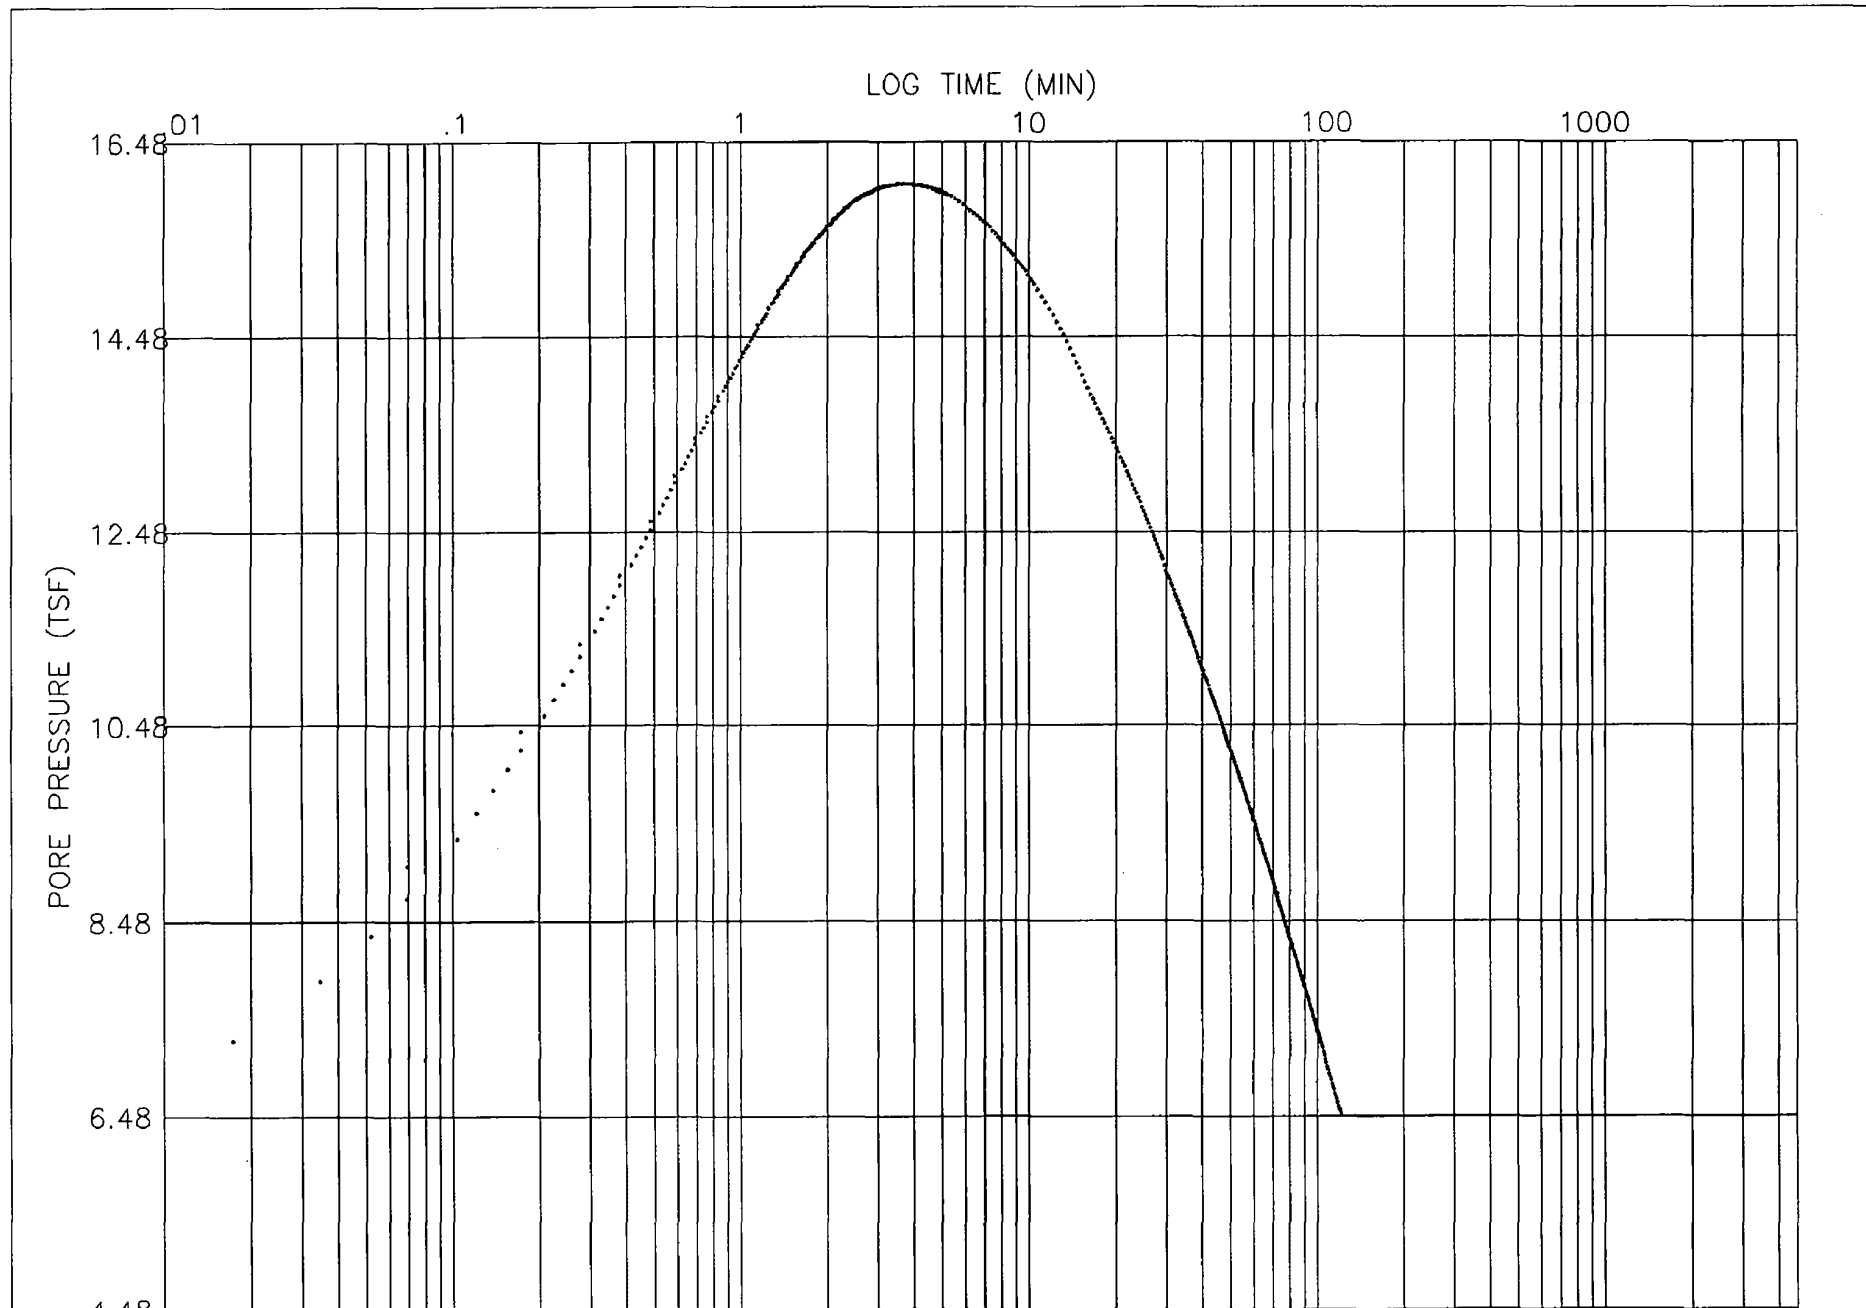


CPT NUMBER: C-2311A  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 91.5 FEET  
DATE: 07-Jan-2008


LOG TIME (MIN)

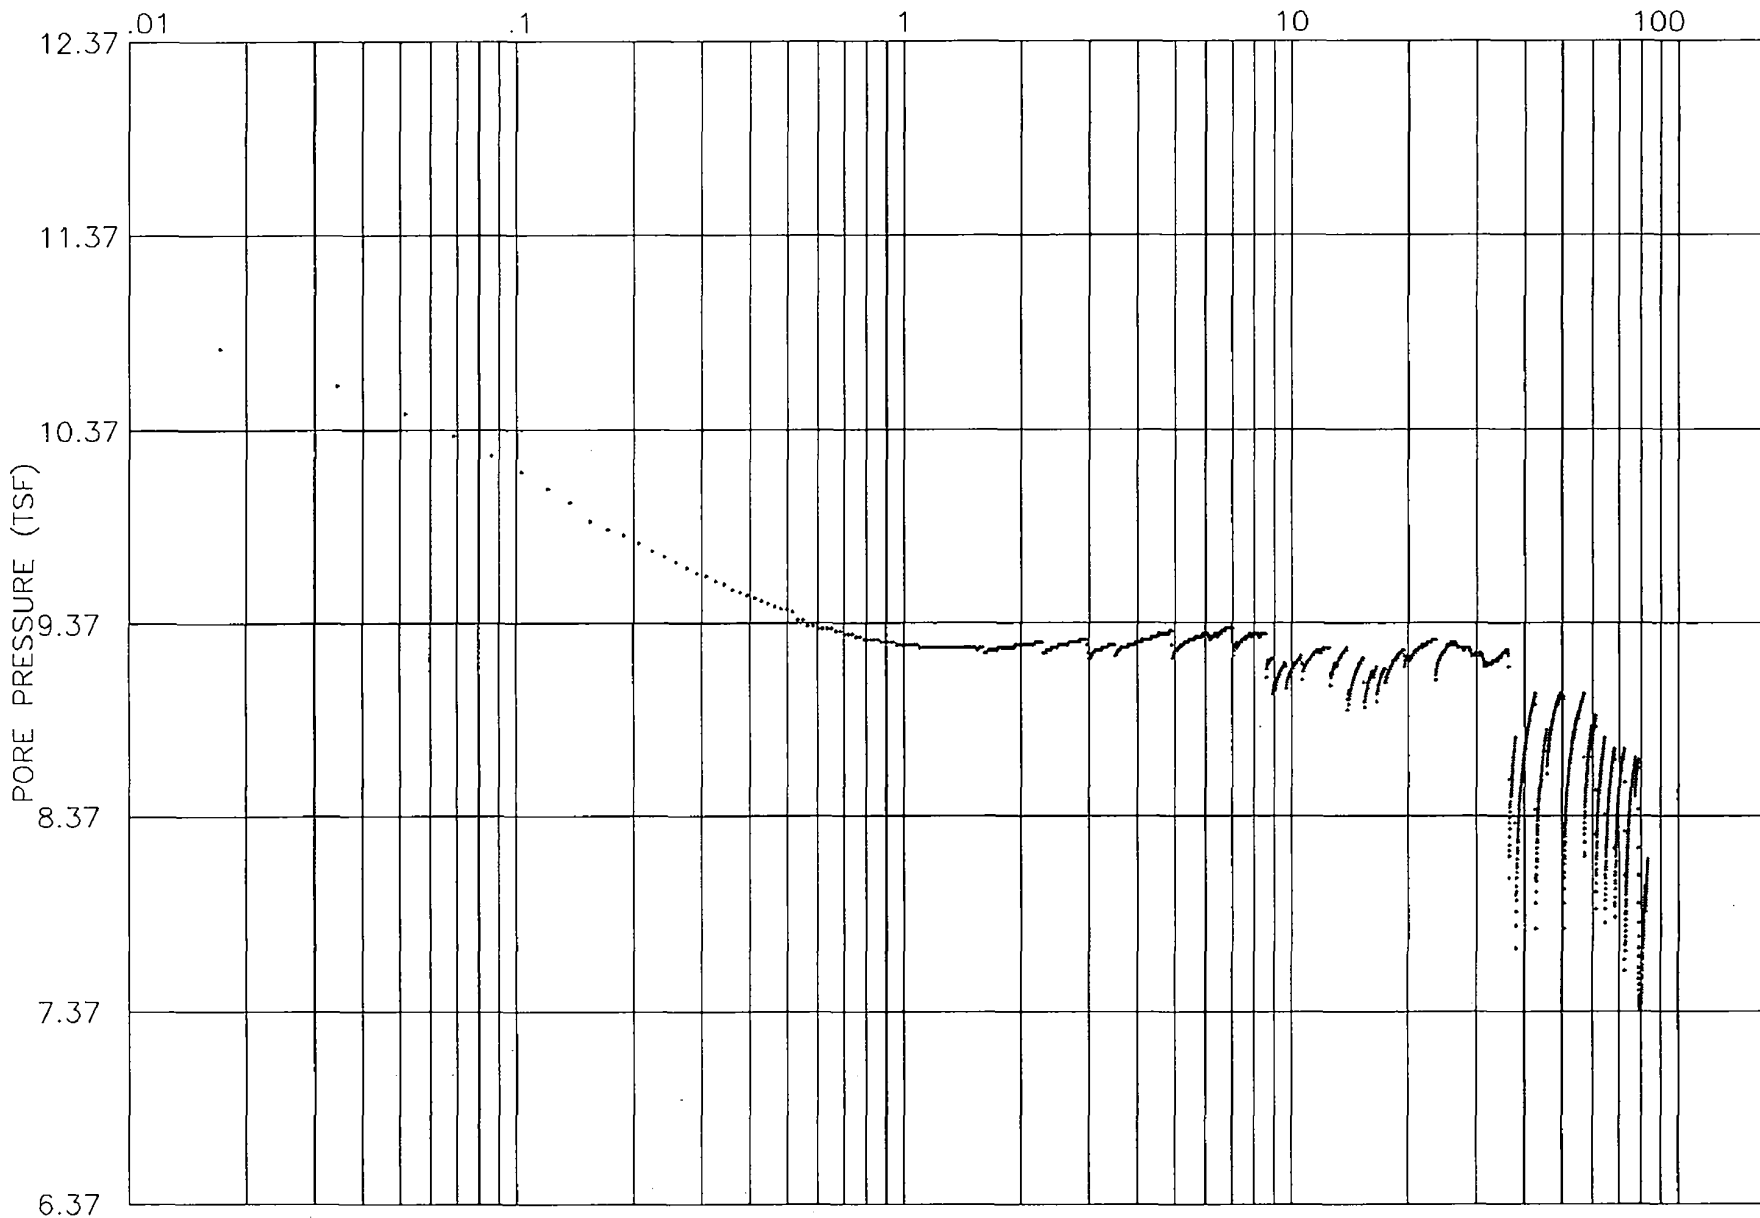

CPT NUMBER: C-2312  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 51.9 FEET  
DATE: 03-Jan-2008

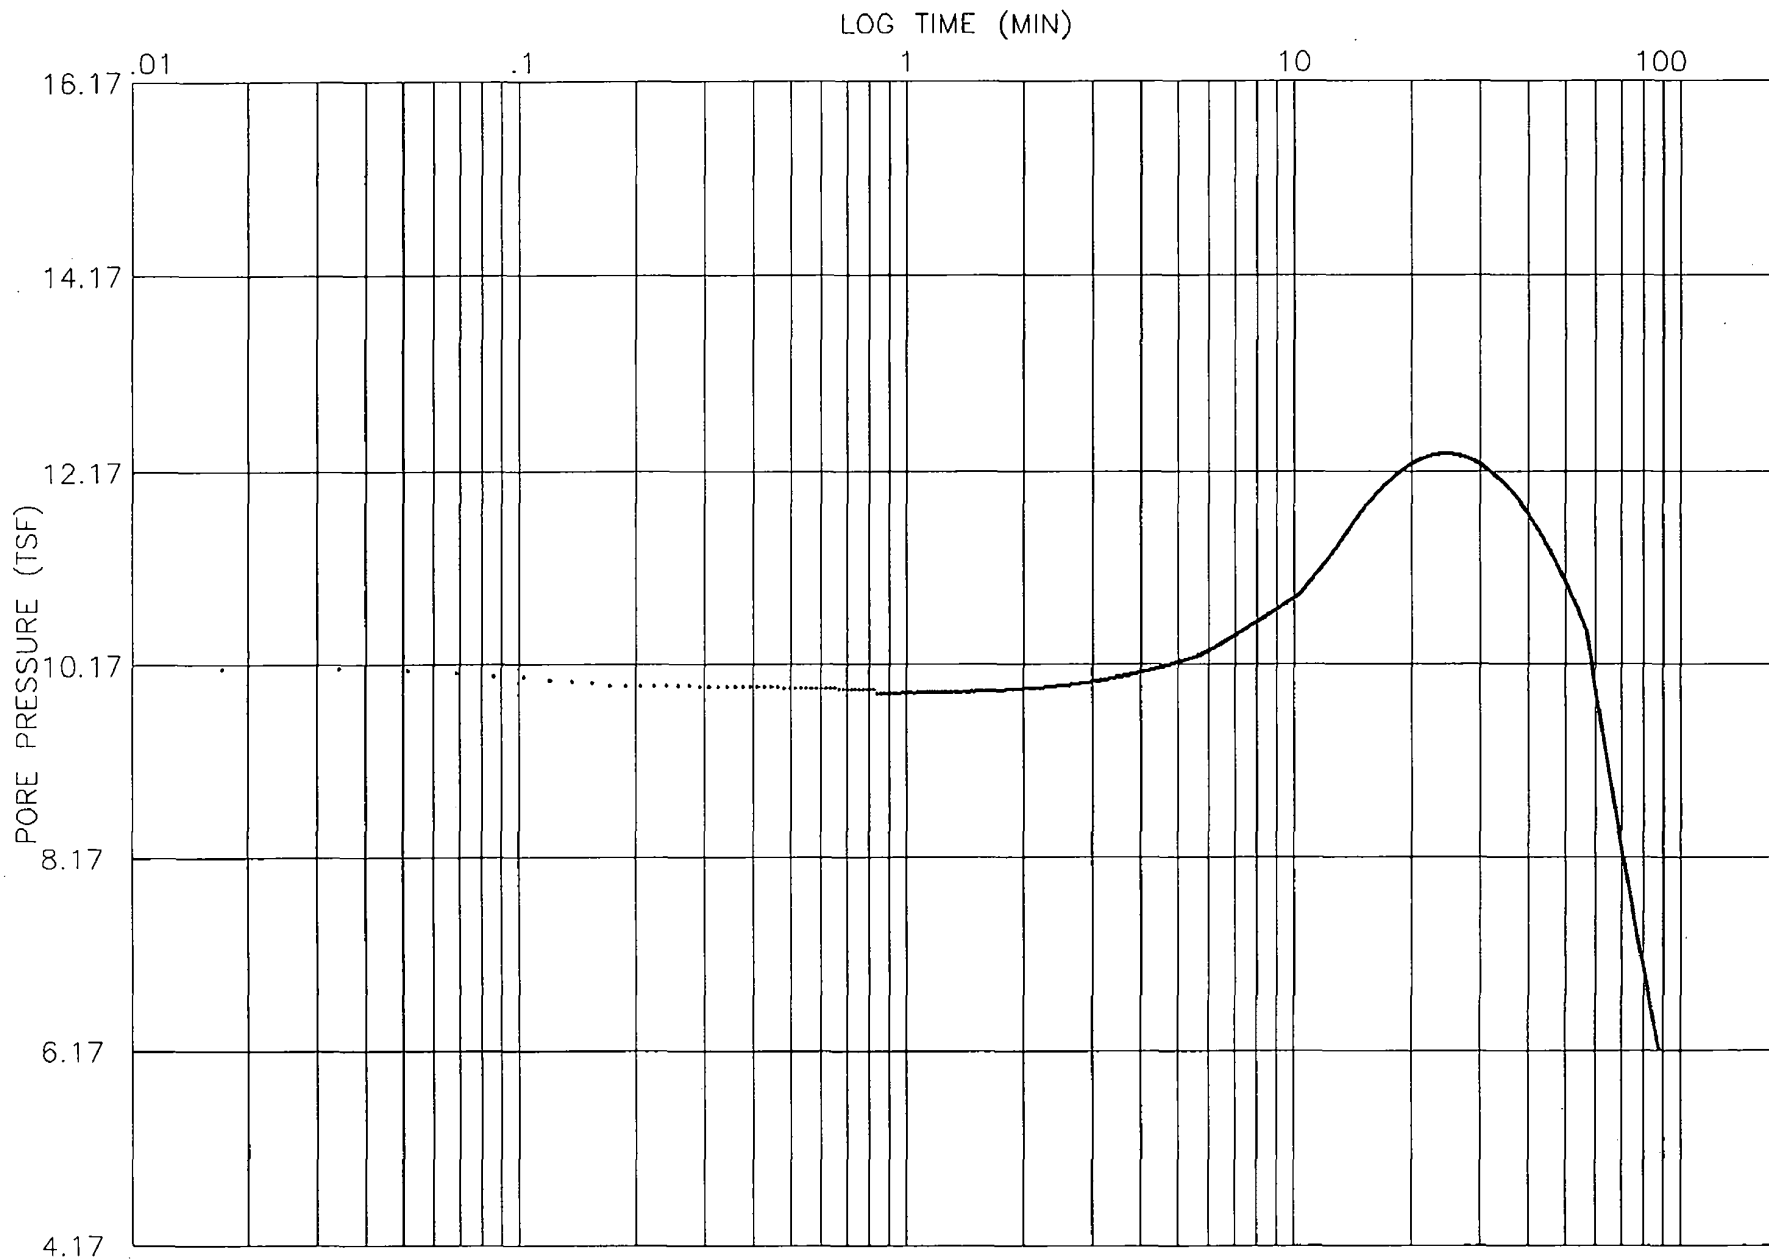


CPT NUMBER: C-2312  
JOB NUMBER: 1907-0075

DISSIPATION TEST

DEPTH: 70.6 FEET  
DATE: 03-Jan-2008



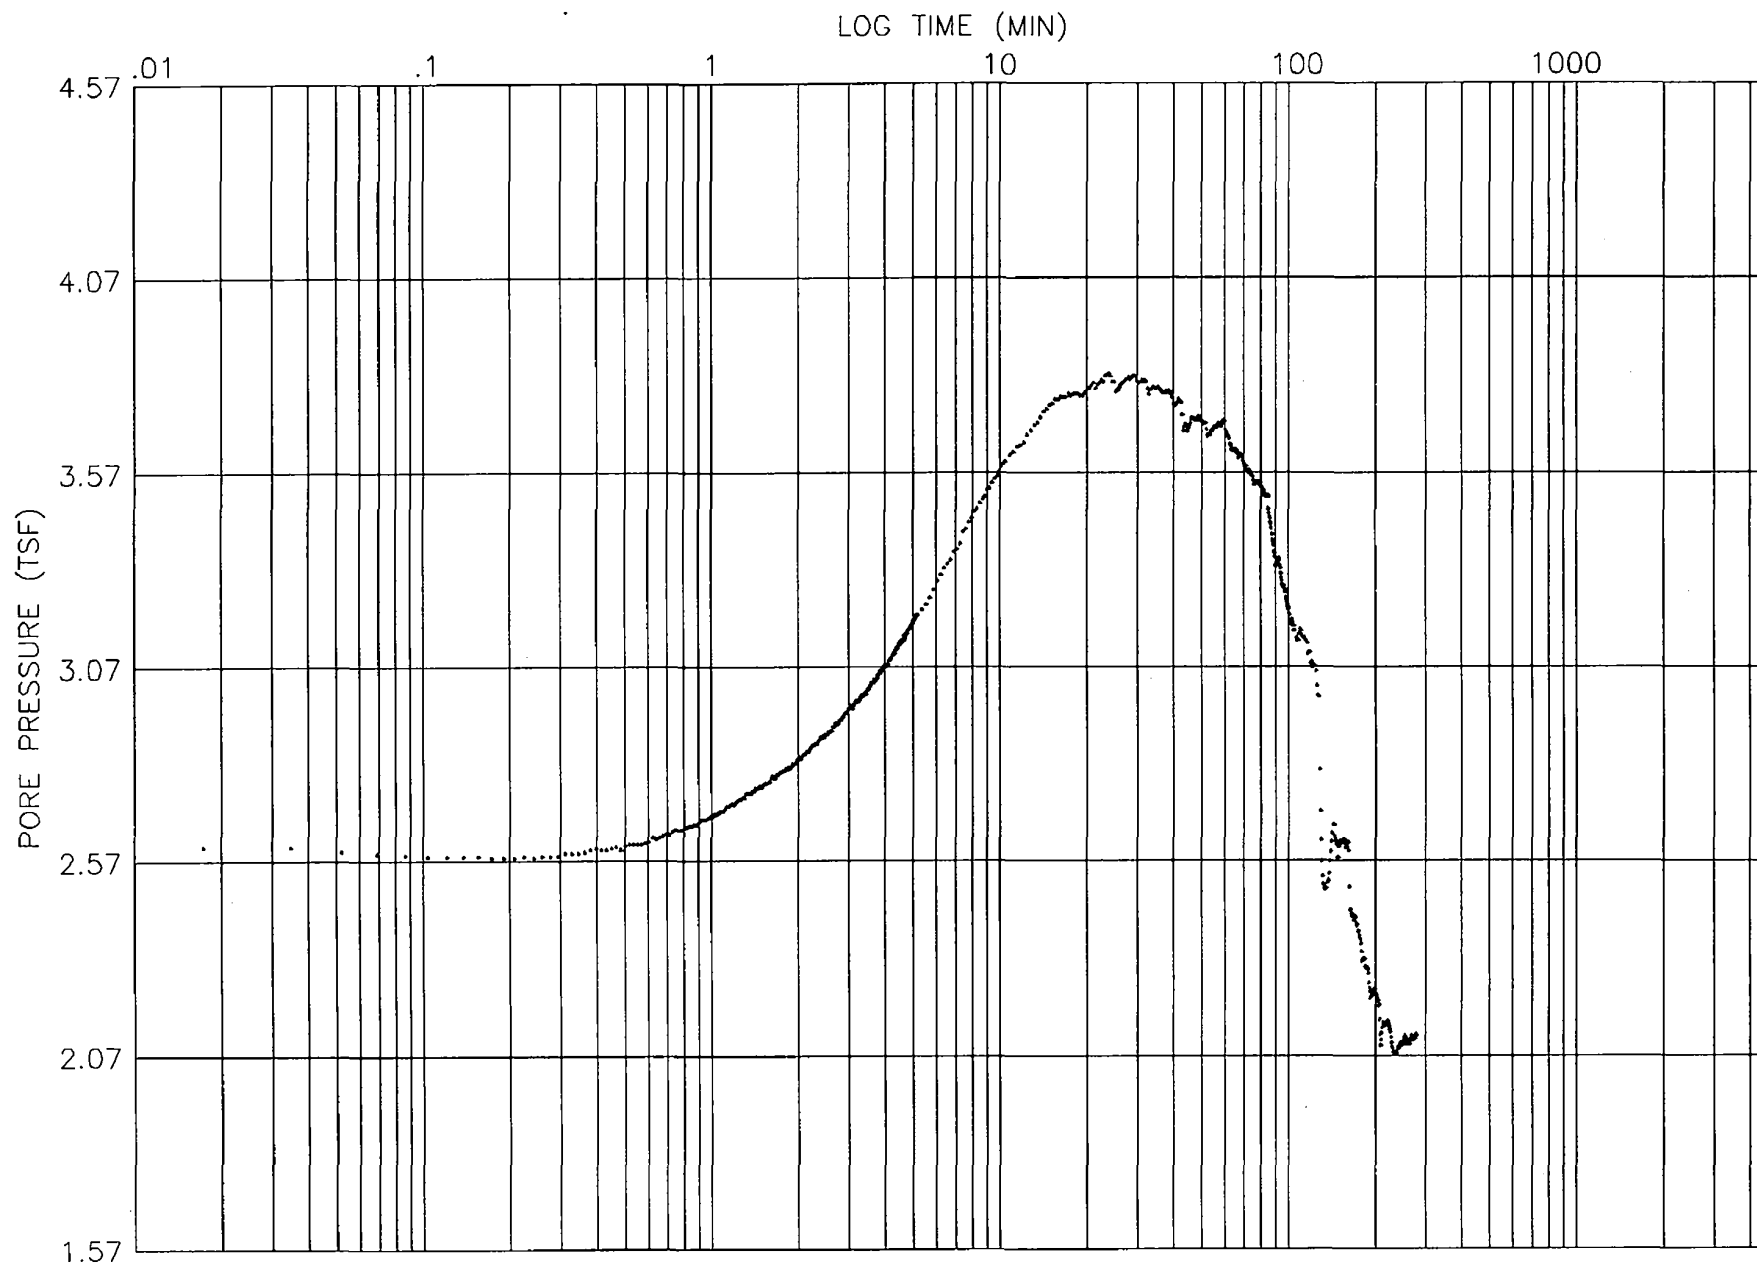


CPT NUMBER: C-2323sA  
JOB NUMBER: 1907-0075


DISSIPATION TEST

DEPTH: 100.1 FEET  
DATE: 08-Jan-2008


# SEISMIC DATA

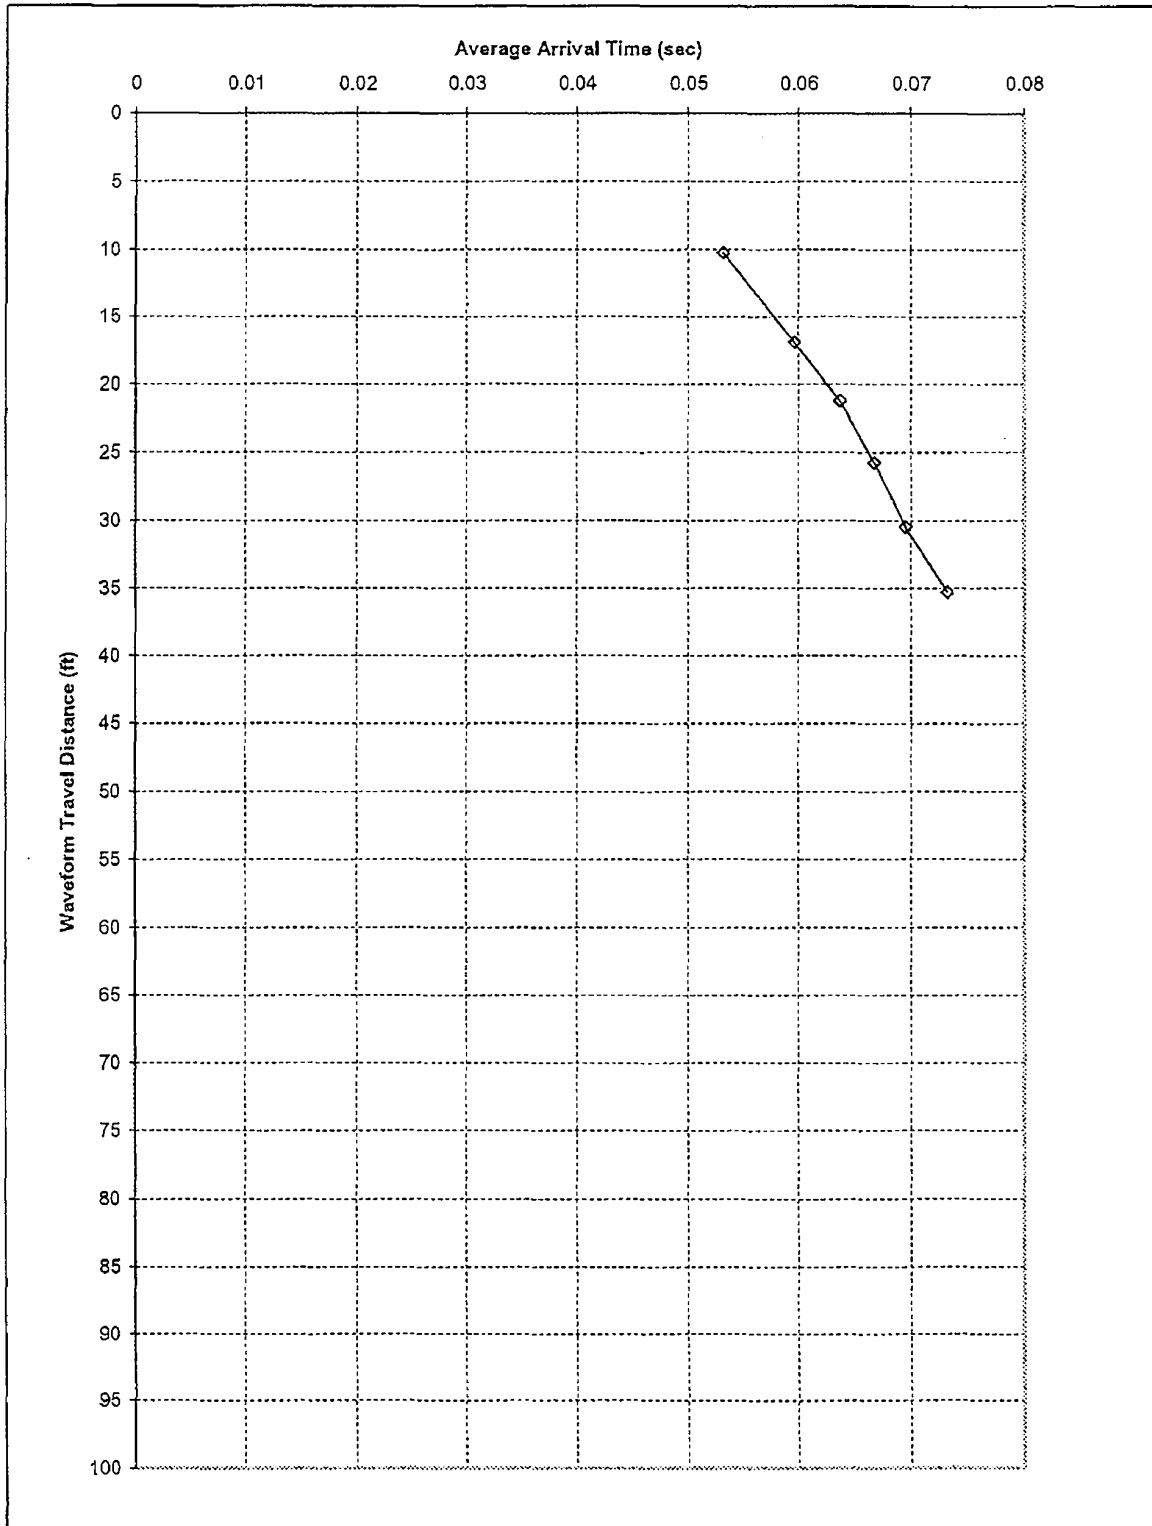


AVERAGE ARRIVAL TIME VERSUS WAVEFORM TRAVEL DISTANCE  
2301s

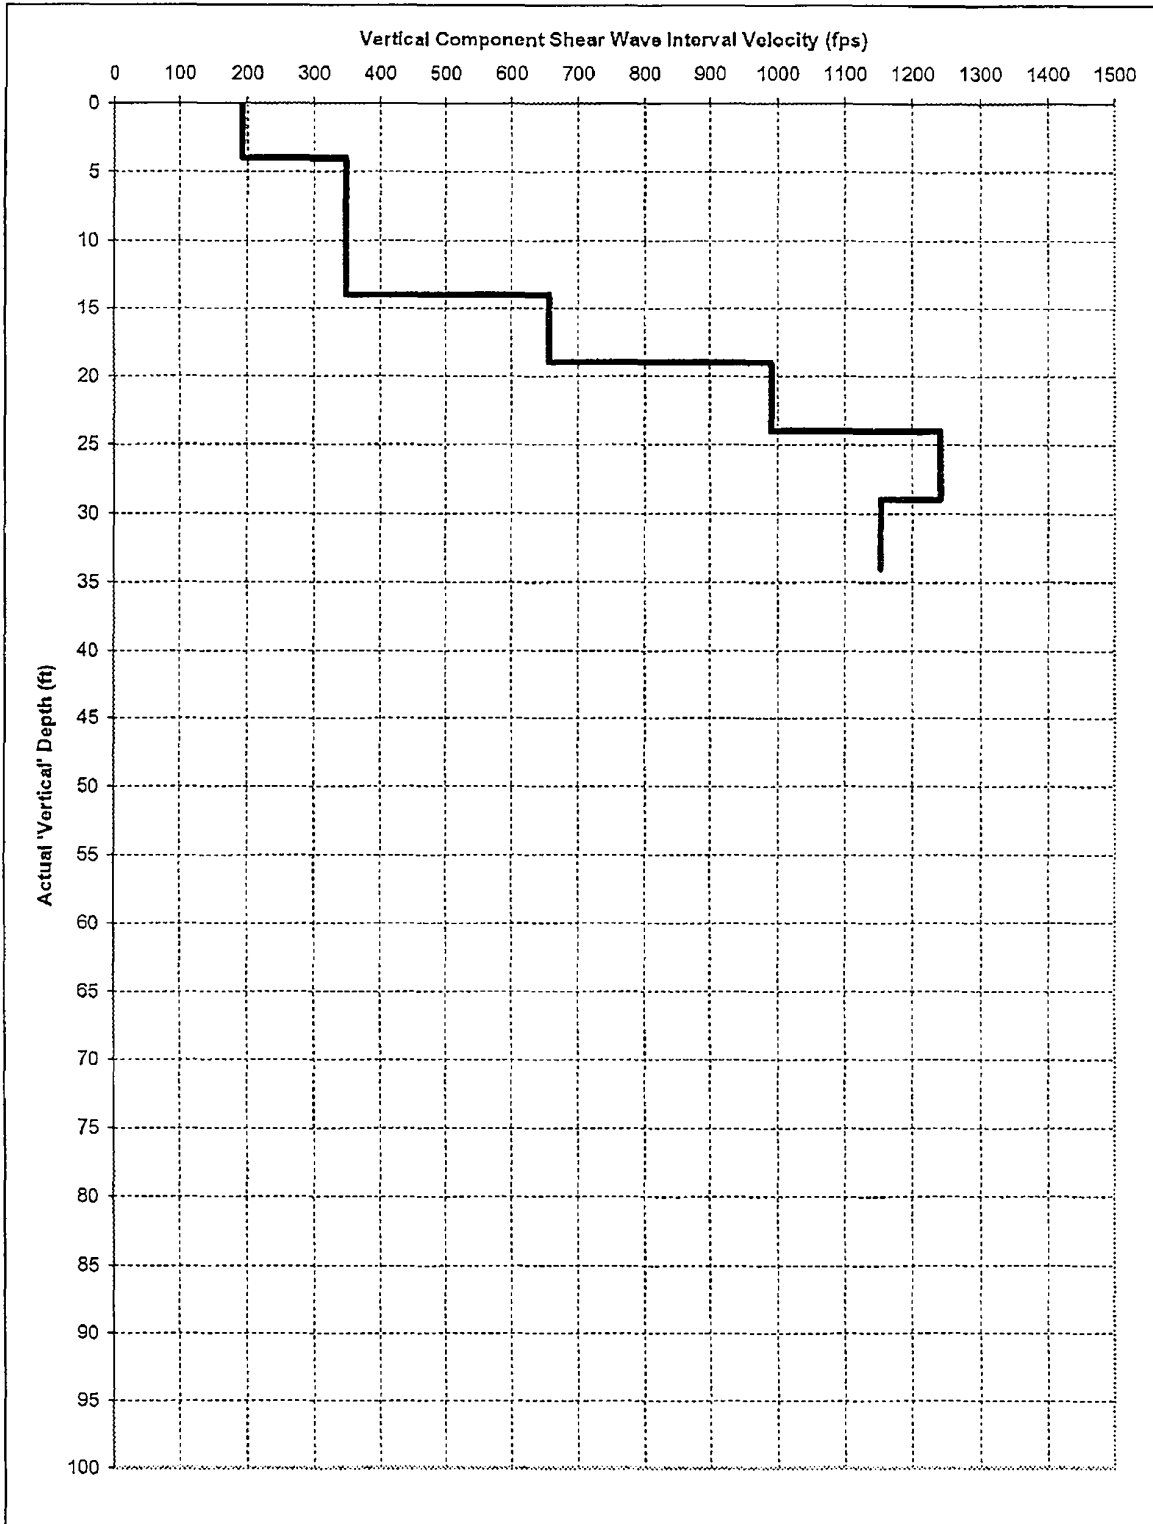

SHEAR WAVE INTERVAL VELOCITY VERSUS VERTICAL DEPTH  
2301s

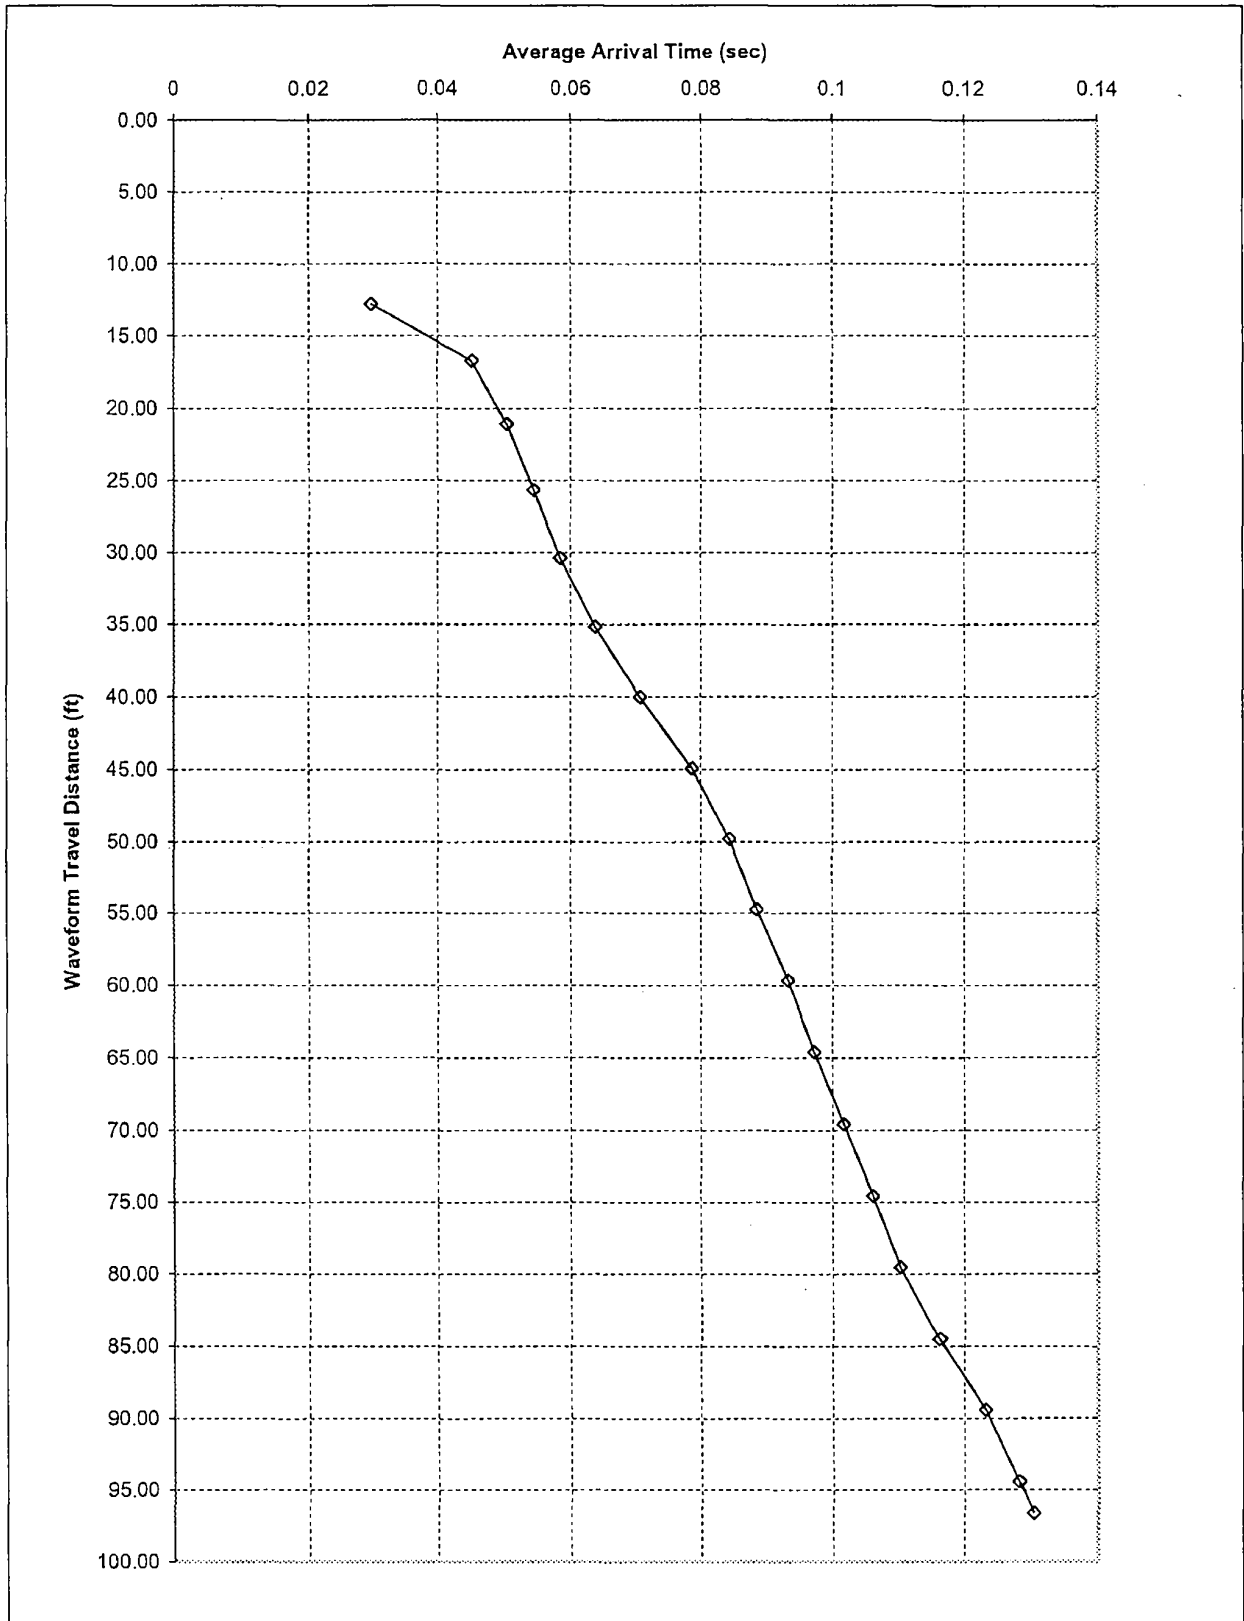


AVERAGE ARRIVAL TIME VERSUS WAVEFORM TRAVEL DISTANCE  
(SCPT C-2303s)

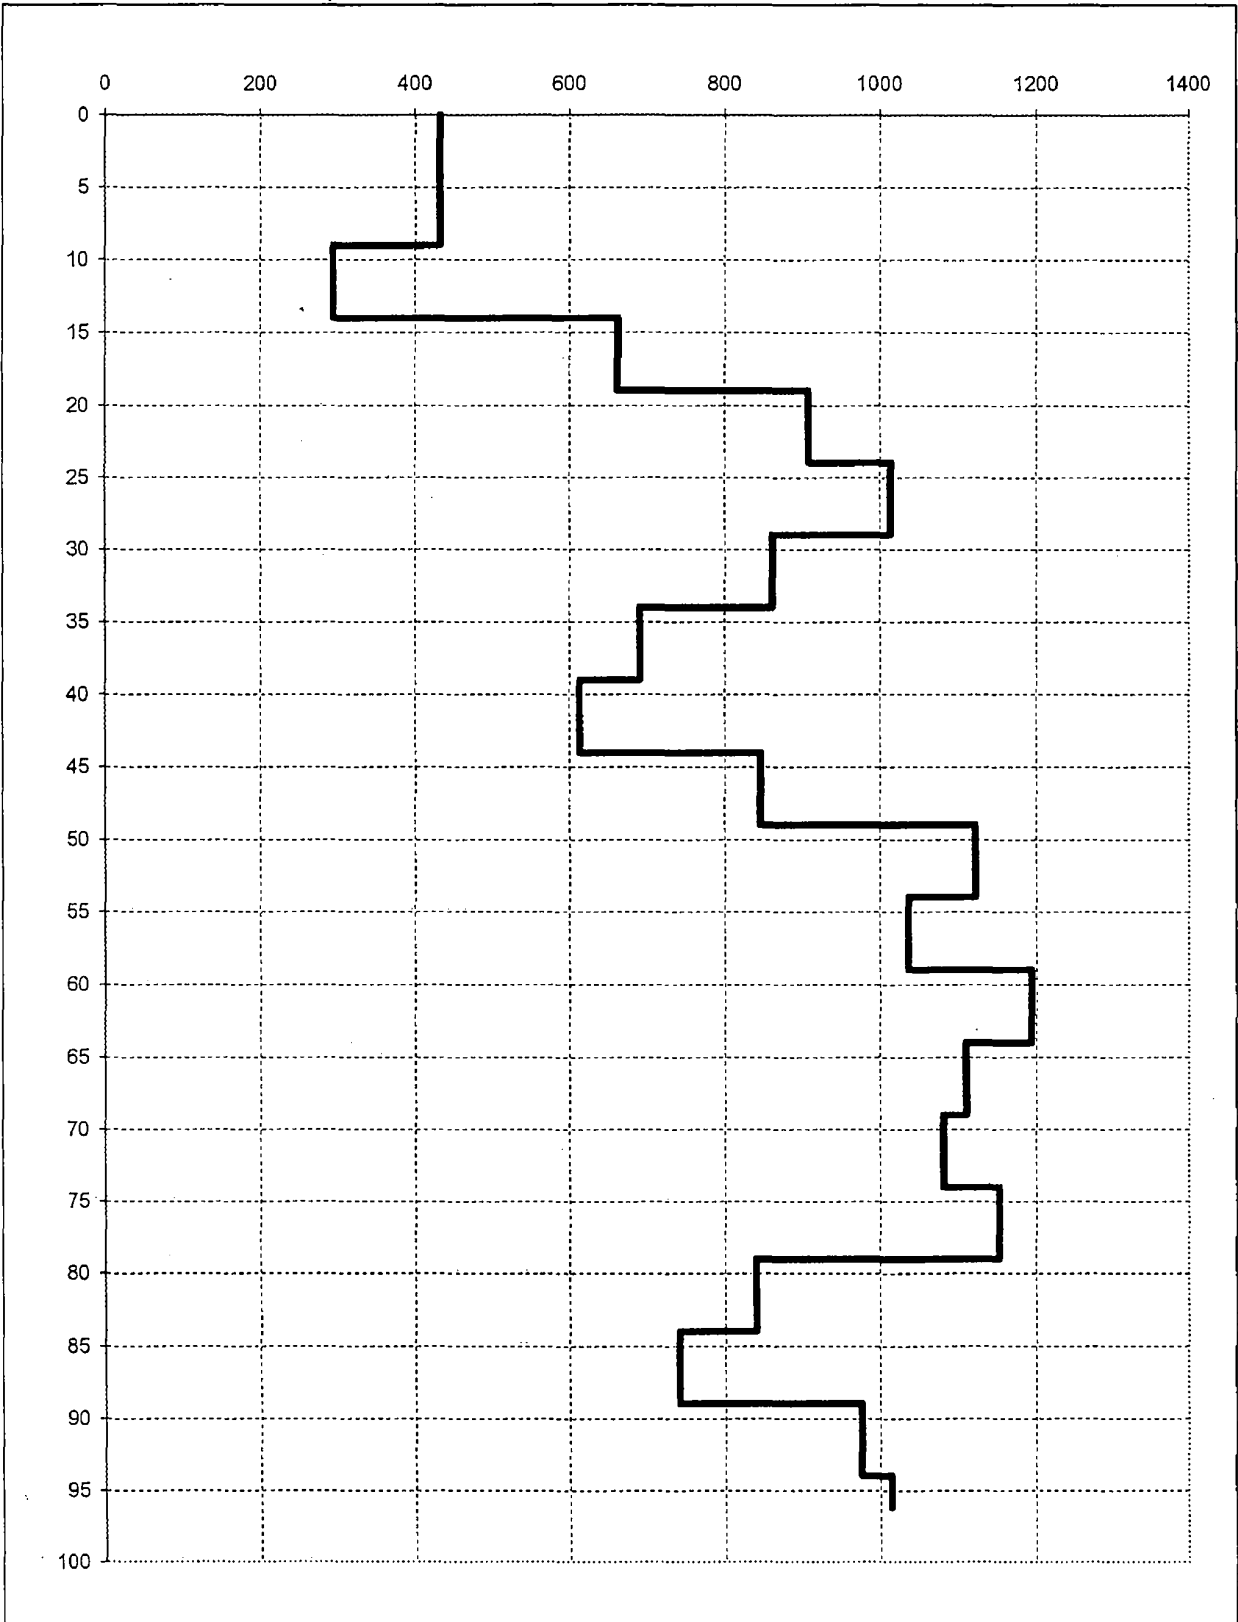


SHEAR WAVE INTERVAL VELOCITY VERSUS VERTICAL DEPTH



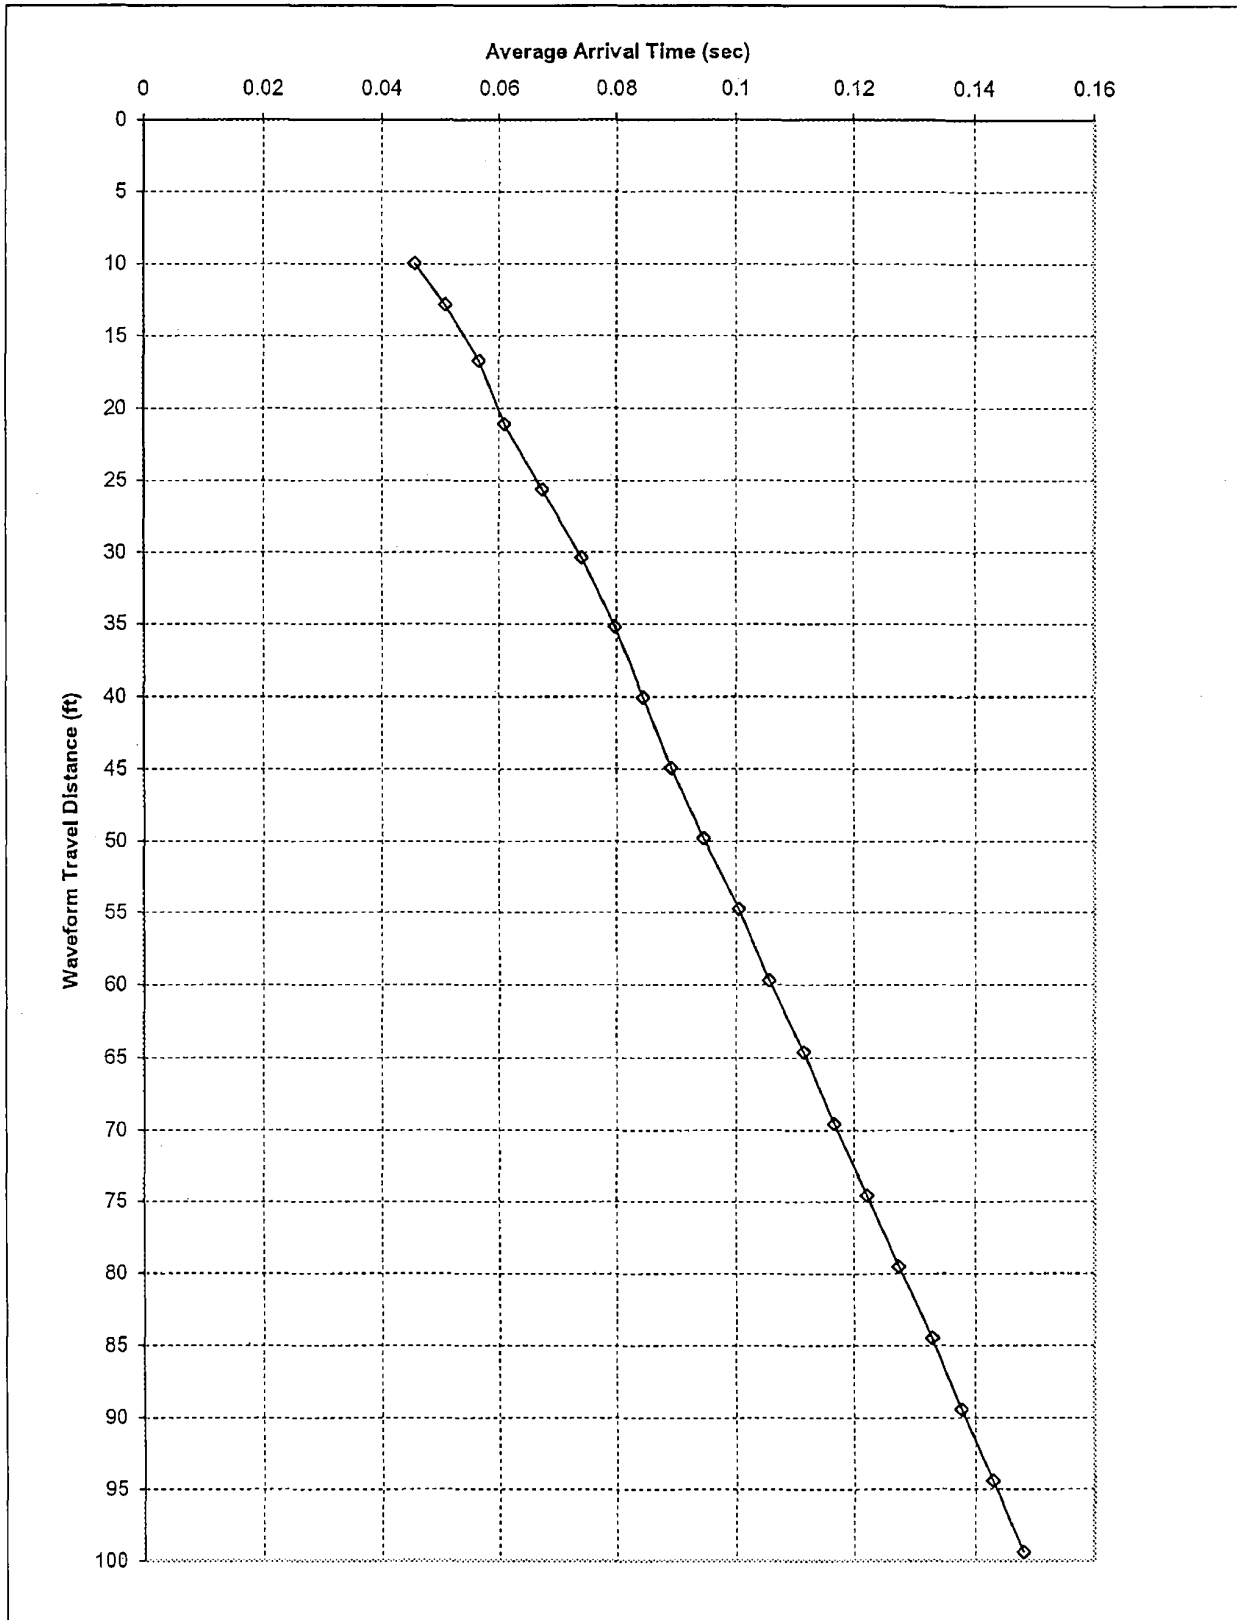

AVERAGE ARRIVAL TIME VERSUS WAVEFORM TRAVEL DISTANCE

C-2323sA

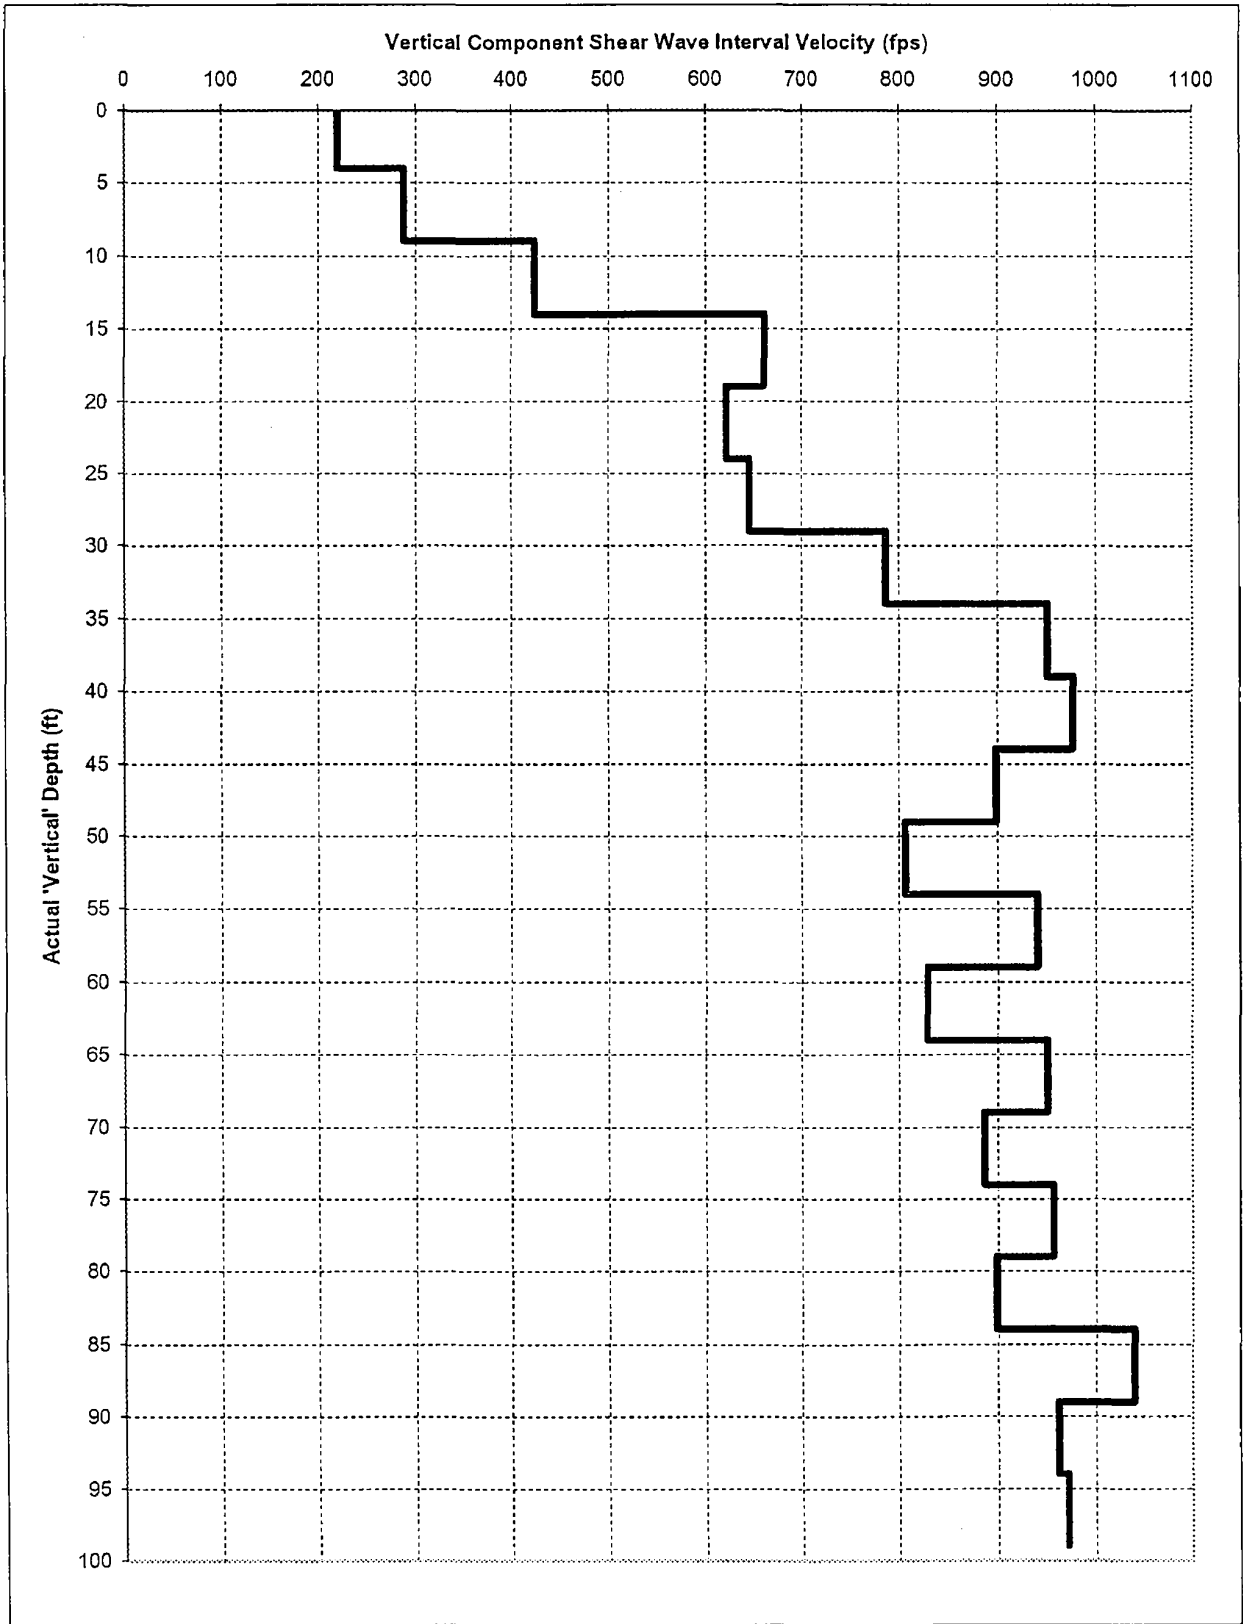

SHEAR WAVE INTERVAL VELOCITY VERSUS VERTICAL DEPTH

**APPENDIX A**  
**FUGRO'S CONE PENETROMETERS**

**APPENDIX A**


**FUGRO PENETROMETER TIPS DATA - TYPES FCKE**

SPECIFICATIONS LOADCELLS		F5CKE	F10CKE	F7.5CKE F15CKE A15F7.5CKE
<b>CONE LOADCELL</b>				
Base Area	cm <sup>2</sup>	10	10	15
Apex Angle	DEG	60	60	60
Full Range	kN	50	100	150
Load Limit	kN	100	100	200
Effect of 10 bar water pressure	N	450	450	880
Output at zero load	mV	< ± 0.5	< ± 0.5	< ± 0.5
Full range output (FRO)	mV	10	10	10
Input resistance	ohm ca.	270	270	270
Output resistance	ohm ca.	240	240	240
Non linearity and hysteresis	%FRO	< 0.1	< 0.1	< 0.1
Calibration accuracy	%FRO	< 0.5	< 0.5	< 0.5
Rated bridge supply voltage	Volt	10	10	10
Maximum bridge supply voltage	Volt	15	15	15
Thermal zero shift	%FRO/10 <sup>0</sup> C	< 0.2	< 0.2	< 0.2
Thermal Sensitivity shift	%FRO/10 <sup>0</sup> C	< 0.1	< 0.1	< 0.1
Repeatability	%FRO	< 0.1	< 0.1	< 0.1
<b>SLEEVE + CONE LOADCELL</b>				
Sleeve Area	cm <sup>2</sup>	150	150	200
Full Range	kN	50	100	150
Load Limit	kN	100	100	200
Effect of 10 bar water pressure	N	300	300	280
Output at zero load	mV	< ± 0.5	< ± 0.5	< ± 0.5
Full range output	mV	10	10	10
Input resistance	ohm ca.	270	270	270
Output resistance	ohm ca.	240	240	240
Non linearity and hysteresis	%FRO	< 0.1	< 0.1	< 0.1
Calibration accuracy	%FRO	< 0.5	< 0.5	< 0.5
Rated bridge supply voltage	Volt	10	10	10
Maximum bridge supply voltage	Volt	15	15	15
Thermal zero shift	%FRO/10 <sup>0</sup> C	< 0.2	< 0.2	< 0.2
Thermal Sensitivity shift	%FRO/10 <sup>0</sup> C	< 0.1	< 0.1	< 0.1
Repeatability	%FRO	< 0.1	< 0.1	< 0.1
<b>GENERAL</b>				
Friction output at full range load of cone	%FRO	< 2		
Compensated temperature range	°C	- 10 to + 40		
Maximum temperature	°C	80		
Insulation resistance	10 <sup>8</sup> ohm	> 5		
Slope sensor built-in		on request		

**NOTES:** The friction sleeve is located immediately above the cone.  
 Standard delivery includes: cone, calibration sheet, and connector tube.  
 The accuracy during field use will depend on: field calibrations, treatment during testing, readout equipment, abrasion and maintenance.



**TYPE F7.5CKEW/V**

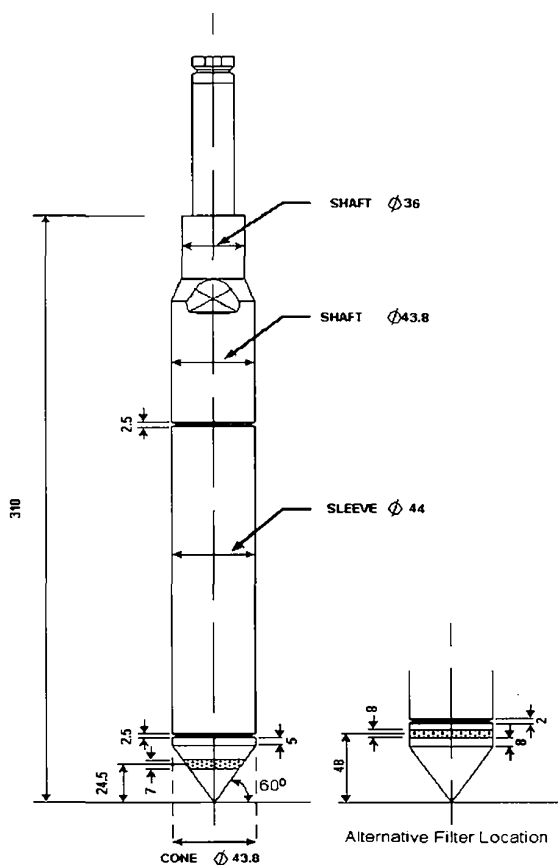

**DIMENSIONS**

CONE BASE AREA	(mm <sup>2</sup> )	: 1,500
SLEEVE AREA	(mm <sup>2</sup> )	: 20,000
α FACTOR		: 0.59

**SPECIFICATIONS**

**CONE LOAD CELL**

- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200

**CONE PLUS SLEEVE LOAD CELL**

- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200


**PORE PRESSURE TRANSDUCER**

- FULL SCALE RANGE	(Mpa)	: 5.0
- BURST PRESSURE	(Mpa)	: 12.5

**NOTES:**

1. LOAD CELLS/TRANSDUCERS MAY BE CALIBRATED FOR LOWER RANGES
2. UNEQUAL SLEEVE END AREAS
3. SUBTRACTION TYPE
4. ALL DIMENSIONS IN mm
5. BUILT-IN AMPLIFIERS
6. SLOPE SENSOR INCORPORATED
7. THREADED END : INTERNAL, CONICAL

**TYPE F7.5CKEgV**

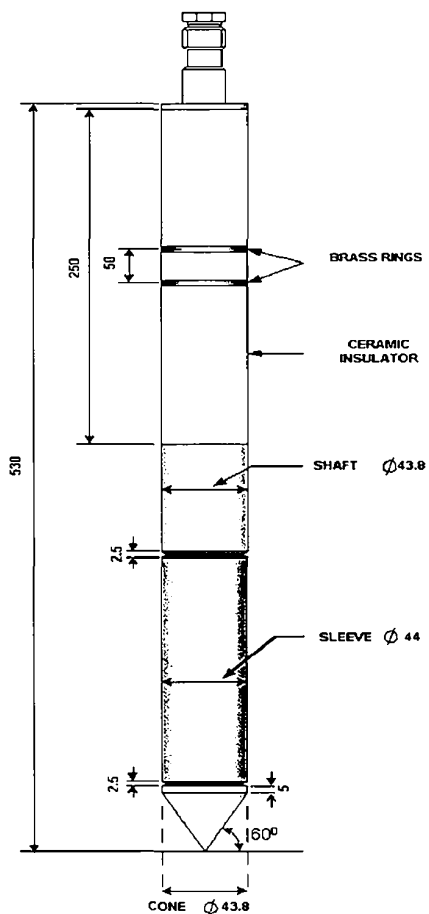

**DIMENSIONS**

CONE BASE AREA	(mm <sup>2</sup> )	: 1,500
SLEEVE AREA	(mm <sup>2</sup> )	: 20,000
α FACTOR		: 0.59

**SPECIFICATIONS**

**CONE LOAD CELL**

- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200

**CONE PLUS SLEEVE LOAD CELL**

- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200

**PORE PRESSURE TRANSDUCER**

- FULL SCALE RANGE	(Mpa)	: 5.0
- BURST PRESSURE	(Mpa)	: 12.5


**ELECTRICAL CONDUCTIVITY**

- FULL SCALE RANGE	(S/m)	: 1.0
- MAXIMUM RANGE	(S/m)	: 5.0

**NOTES:**

1. LOAD CELLS/TRNSDUCERS MAY BE CALIBRATED FOR LOWER RANGES
2. UNEQUAL SLEEVE END AREAS
3. SUBTRACTION TYPE
4. ALL DIMENSIONS IN mm
5. BUILT-IN AMPLIFIERS
6. SLOPE SENSOR INCORPORATED
7. THREADED END : EXTERNAL. M28 x 2

**TYPE F7.5CKE/V**

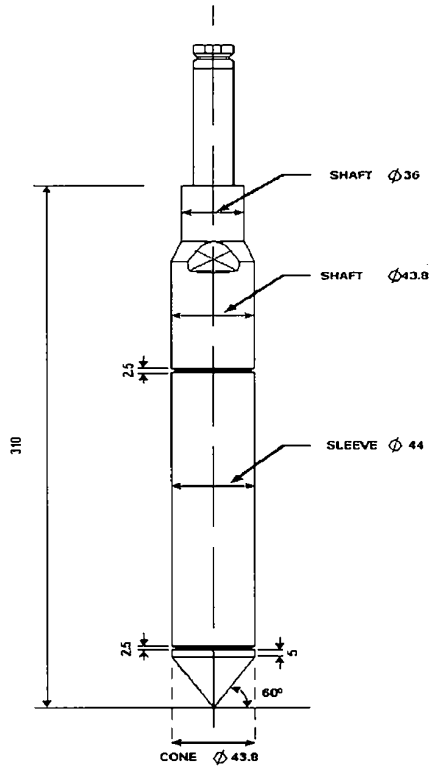

**DIMENSIONS**

CONE BASE AREA	(mm <sup>2</sup> )	: 1,500
SLEEVE AREA	(mm <sup>2</sup> )	: 20,000
α FACTOR		: 0.59

**SPECIFICATIONS**

**CONE LOAD CELL**

- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200

**CONE PLUS SLEEVE LOAD CELL**


- FULL SCALE RANGE	(kN)	: 75
- OVERLOAD CAPACITY	(kN)	: 200

**NOTES:**

1. LOAD CELLS/TRANSDUCERS MAY BE CALIBRATED FOR LOWER RANGES
2. UNEQUAL SLEEVE END AREAS
3. SUBTRACTION TYPE
4. ALL DIMENSIONS IN mm
5. BUILT-IN AMPLIFIERS
6. SLOPE SENSOR INCORPORATED
7. THREADED END : INTERNAL, CONICAL

**APPENDIX B**  
**FUGRO'S DEPLOYMENT SYSTEMS**



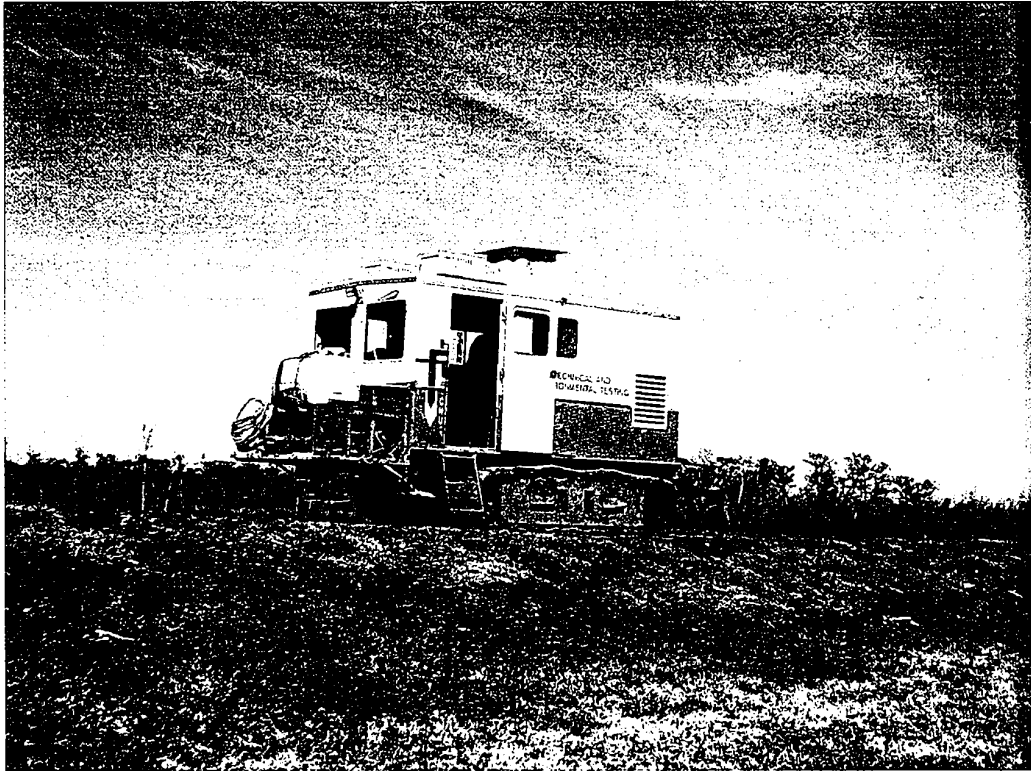

**APPENDIX C**  
**ZERO READINGS**

CPT	Date	Cone Type	Cone S/N	Tip Start	Tip Stop	Sleeve Sta	Sleeve Sto	Piezo Start	Piezo End	Slope Star	Slope End
C-2301S	02-Jan-2008	F2.5CKEW2/B	1701-1788	0.033911	0.025065	0.002551	-0.0059	-0.001484	-0.004622	0.01109	0.010677
C-2301SA	02-Jan-2008	F2.5CKEW2/B	1701-1788	0.029175	0.0271	-0.001294	-0.006144	-0.002617	-0.005762	0.011129	0.011003
C-2302	05-Jan-2008	F7.5CKEW2/B	1701-1498	0.005432	0.004801	0.002441	0.00175	-0.00166	-0.001563	0.045367	0.043424
C-2303s	18-Dec-2007	F2.5CKEW2/B	1701-1788	0.031543	0.029948	-0.001624	-0.007894	-0.001631	-0.005599	0.010938	0.010664
C-2304	17-Dec-2007	F2.5CKEW2/B	1701-1788	0.028674	0.026408	-0.004517	-0.010132	-0.003848	-0.006185	0.011074	0.010586
C-2305	19-Dec-2007	F2.5CKEW2/B	1701-1788	0.027563	0.028239	-0.006311	-0.007487	-0.004639	-0.004753	0.010703	0.010703
C-2306	19-Dec-2007	F2.5CKEW2/B	1701-1788	0.030945	0.029215	-0.002637	-0.007975	-0.007432	-0.00459	0.010602	0.010781
C-2307	17-Dec-2007	F2.5CKEW2/B	1701-1788	0.025464	0.025024	-0.008728	-0.010742	-0.003584	-0.006185	0.010781	0.010469
C-2308	06-Jan-2008	F7.5CKEW2/B	1701-1498	0.004871	0.003174	0.003052	0.001953	-0.00166	-0.001465	0.048582	0.065091
C-2309	19-Dec-2007	F2.5CKEW2/B	1701-1788	0.027112	0.024089	-0.006238	-0.012288	-0.004346	-0.006934	0.010906	0.010508
C-2310	19-Dec-2007	F2.5CKEW2/B	1701-1788	0.029773	0.027547	-0.004333	-0.008911	-0.003701	-0.005697	0.010848	0.010625
C-2311	06-Jan-2008	F7.5CKEW2/B	1701-1498	0.003564	0.00415	0.002441	0.002401	-0.002617	-0.001465	0.043184	0.045169
C-2311A	07-Jan-2008	F7.5CKEW2/B	1701-1498	0.007947	0.007853	0.006824	0.006592	-0.001758	-0.001563	0.044211	0.046367
C-2312	03-Jan-2008	F7.5CKEW2/B	1701-1498	0.007837	0.003825	0.005798	0.000936	-0.001953	-0.00166	0.043984	0.045234
C-2313	20-Dec-2007	F2.5CKEW2/B	1701-1788	0.030615	0.02596	-0.003552	-0.011393	-0.00377	-0.006966	0.010828	0.010469
C-2314	19-Dec-2007	F2.5CKEW2/B	1701-1788	0.029297	0.026611	-0.005054	-0.010213	-0.004443	-0.006152	0.010742	0.010508
C-2315	07-Jan-2008	F7.5CKEW2/B	1701-1498	0.010376	0.006999	0.007495	0.004801	-0.001563	-0.001432	0.045859	0.043021
C-2316	08-Jan-2008	F7.5CKEW2/B	1701-1498	0.011951	0.009521	0.009485	0.00647	-0.00166	-0.001465	0.045918	0.048789
C-2317	07-Jan-2008	F7.5CKEW2/B	1701-1498	0.009766	0.009155	0.007214	0.006429	-0.00166	-0.00166	0.043887	0.042852
C-2318	20-Dec-2007	F2.5CKEW2/B	1701-1788	0.025854	0.026978	-0.007495	-0.008545	-0.005332	-0.006217	0.010664	0.010586
C-2319	20-Dec-2007	F2.5CKEW2/B	1701-1788	0.026379	0.024658	-0.007227	-0.010742	-0.004648	-0.005371	0.010664	0.010599
C-2321S	04-Jan-2008	F2.5CKEW2/B	1701-1788	0.032861	0.030314	0.003174	-0.001953	-0.001924	-0.004753	0.011375	0.011081
C-2321SA	04-Jan-2008	F2.5CKEW2/B	1701-1788	0.030566	0.026978	-0.001099	-0.006429	-0.004189	-0.005273	0.011797	0.011497
C-2322	10-Jan-2008	F2.5CKEW2/B	1701-1788	0.031079	0.031657	0.001904	0.000854	-0.003438	-0.004948	0.01125	0.010703
C-2323S	08-Jan-2008	F2.5CKEW2/B	1701-1788	0.027893	0.02832	-0.002661	-0.003947	-0.006172	-0.007617	0.01082	0.010703
C-2323SA	09-Jan-2008	F2.5CKEW2/B	1701-1788	0.03269	0.029134	0.003967	-0.001465	-0.001924	-0.00485	0.011094	0.011133
C-2324	20-Dec-2007	F2.5CKEW2/B	1701-1788	0.028076	0.024414	-0.006372	-0.008179	-0.005234	-0.006445	0.010703	0.010625
C-2328	04-Jan-2008	F7.5CKEW2/B	1701-1498	0.007397	0.005046	0.006323	0.002523	-0.002148	-0.001563	0.042414	0.06849



6105 Rookin Road  
Houston, Texas 77074  
Tel: 713-346-4000  
Fax: 713-346-4002

January 24, 2008  
Report Number 1907-0075

Mactec Engineering and Consulting, Inc.  
7041 Old Wake Forest Road  
Suite 103  
Raleigh, North Carolina 27616

Attention: Mr. Scot Auger, P.E., PMP

**CALIBRATION VERIFICATION REPORT  
FOR SEISMIC PIEZOCONE PENETRATION TESTING  
EXELON TEXAS COL  
VICTORIA, TEXAS  
MACTEC PROJECT #6468071777**

Dear Mr. Auger:

Please find enclosed herewith the calibration verification results for the instruments used in the above referenced project. The data has been reviewed and has undergone the appropriate QA/QC process. These post calibrations checks were performed on cones F7.5CKEW2/B 1701-1832, F7.5CKESW2/B 1701-1788, and F7.5CKEW2/B 1701-1498. Post calibration checks on cone F7.5CKEW2/B 1701-1831 which was damaged attempting to perform a CPT through drill pipe.

Fugro's cone penetrometer manufacturing and calibration procedures include ISO 9001, ASTM D5778-2000 and European cone penetrometer standards. Cone penetrometers are tested and calibrated for the following:

**Mechanical Calibration**

- Cross Talk Check
- Dimension Check
- Seal/O-Ring Check

**Electronic Calibration**

- Temperature effect
- Pre and Post test voltage readings (zeros)
- Full scale output load readings
- Pore Pressure transducer calibration
- Slope indicator calibration

**Calibration Verification Methodology**

Manufactured and calibrated according to ISO 9001, the calibration values of the electric cone penetrometers used for this project were verified before and after fieldwork utilizing the following A2LA and/or ANSI/NCSL approved verification systems.





**Tip and Friction** (Up To 10,000 lbs.)

Load cell: Indicator system  
Calibrated by: Interface (A2LA approved)  
Calibration date: March 9, 2007  
Load cell model: 1211EX-10KB, Serial No. 113655  
Capacity: 10,000 lbs.  
Indicator: Interface 9820-000-1, Serial No. M2635

**Tip** (Up To 20,000 lbs.)

Load cell: Geotac  
Calibrated by: Applied Technical Services (A2LA approved)  
Calibration date: November 28, 2006 and March 14, 2008 ZHU 4/29/08  
Load cell model: 560K  
Capacity: 50,000K

**Pore Pressure Transducer**

Digital Pressure Indicator

Calibrated by: GD Sensing (ANSI/NCSL approved)  
Manufactured by: Eaton  
Model number: UPS 3000CC  
Serial number: A0813  
Calibration date: September 15, 2006

**Cone Penetrometer Temperature**

Digital Thermometer

Calibrated by: Houston Precision (ANSI/NCSL approved)  
Manufactured by: Cole Parmer  
Model Number: Degi-sence Type K  
Serial Number: TD-001  
Calibration date: November 16, 2007

Utilizing the above systems each was load and pressure tested as follows:

Tip: 0-20,000 lb.  
Friction: 0-7,500 lb.  
Pore Pressure: 0:350 PSI  
Temperature effect 30 Degrees Fahrenheit – 115 Degrees Fahrenheit

Under each load/pressure increment, the cone penetrometer readings are recorded in millivolts (mV). Load/pressure (pounds/psi) load increments and corresponding cone readings in mV are input into **HGL Instrument Verificaton** software to obtain linear regression and correlation coefficient ( $R^2$ ) values (See attached **HGL Instrument Verification** Forms).

Additionally, load/pressure increments and cone readings were also input into a calibration **Verification Certificate Program** to calculate each cone penetrometer's calibration value in MPa units (See attached **Calibration Verification Certificates** for each cone penetrometer). The last column in these forms represents the calibration values of tip, friction and pore pressure.





### Calculation Example

Load Increment, P1	= 590 lb. = 0.295 tons
Tip Reading	= 35.2 mV
Tip Area, A= 15cm <sup>2</sup>	= 0.0161 sq. ft.
Tip Pressure	= P1/A = 0.295/0.0161 = 18.32298 tsf
Tip Pressure Per mV	= 18.32298/35.2 mV = 0.520539 tsf/mv
Tip Pressure Per Volt	= 0.520539 x 1,000 = 520.539 tsf/volt = 49.847 MPa/Volt
Tip Calibration Valve	~ 50 Mpa/Volt

### Temperature Calibration:

Cone Penetrometers are placed in a temperature-controlled enclosure and zero readings recorded in mV at intervals between 30 degrees (F) and 115 degees (F). Temperatures and zero readings (mV) are entered into the **Calibration Verification Certificate** software which calculates the deviation between the maximum and minimum zero readings (mV) for the tip friction and pore pressure channels.

### Data Recording

During the cone penetration test, the calibration numbers are automatically recorded in CPT test data files along with the following information (See attached CPT test data file, 6710.DEP):

Date of CPT test  
Starting time of test  
Project Number  
CPT test number  
Operator name  
Elevation, starting depth, water depth  
Cone serial number  
Number of cone channels (3)  
    Tip calibration (50 MPa)  
    Friction calibration (0.5 MPa)  
    Pore Pressure Calibration (2.5 MPa)  
    Slope calibration (525)  
Initial baseline (zero) readings for depth, tip, friction, pore pressure and slope.

### Seismograph

Seismic data was collected using an ES-300 seismograph manufactured by Geometrics, Inc. The accuracy of the time readings of this instrument was verified before and after field work utilizing following A2LA and/or ANSI/NCSL approved verification systems.

Function Generator:	Oscilloscope with built function generator.
Manufactured by:	EZ Digital, Inc.
Model number:	OS-5020G
Serial number:	3080209
Calibrated by:	Transcat Calibration Services (ANSI/NCSL approved)





Calibration date: February 28, 2007

Frequency Counter, 120 MHz, 1 Channel  
Manufactured by: Insetek God Will Instruments  
Model number: GFC - 8010H  
Serial number: CF 871549

Calibrated by: Transcat Calibration Services (A2LA/NCSL approved)  
Calibration date: February 28, 2007

**Seismograph Verification Methodology**

The function generator was connected to the input of the seismograph and frequency counter. Sine wave signals were generated at 10 Hz intervals from 10-100 Hz. The seismograph was manually triggered for each frequency and the data stored in standard seg2 seismic data format files, one frequency per file. Each file was opened with Seismager software and converted to the frequency domain. The input and seismograph frequencies were entered into **Calibration Verification Certificate** software (See attached **Calibration Verification Certificate**).

Fugro appreciates the opportunity to submit our calibration verification report for your review. If you have any questions, or if we can be of further assistance, please do not hesitate to contact us.

Very truly yours,  
**FUGRO CONSULTANTS, INC.**

A handwritten signature in black ink, appearing to read "Recep Yilmaz", written over a white background.

Recep Yilmaz  
Senior Vice President

RY/jm

1 CD Enclosed



**CALIBRATION  
CERTIFICATES**



## CERTIFICATE OF CALIBRATION

**Customer:** FUGRO CONSULTANTS LP  
6100 HILLCROFT  
HOUSTON, TX 77081

**Customer Nbr:** 1-525293-000

**Cert/RA Nbr:** 5-V2023-1-1  
**Manufacturer:** EZ Digital, Inc  
**Description:** OSCILLOSCOPE  
**Model Nbr:** OS-5020G  
**Serial Nbr:** 3080209  
**ID Nbr:**  
**PO Nbr:** D111

**Date Received:** Feb 28, 2007  
**Date Calibrated:** Feb 28, 2007  
**Next Calibration:** Feb 28, 2008  
**Calibration Proc:** 1-AC10468-0  
**Item Received:** Out Of Tolerance  
**Item Returned:** Limited Calibration

For calibration data, see Supplemental Report for RA Nbr 5-V2023-1-1

**Temperature:** 72°F / 22.2°C

**Relative Humidity:** 47%

Transcat Calibration Laboratories have been afloat and found in compliance with ISO/IEC 17025:2005. Accredited calibrations performed within the Lab's Scope of Accreditation are indicated by the presence of the Accrediting Body's Logo and Certificate Number on this Certificate of Calibration. Any measurements or an accredited calibration not covered by this Lab's Scope are noted below.

Transcat calibrations, as applicable, are performed in compliance with the requirements of ISO 9001:2000, ISO 7814:94, ANSI/NCSL Z540-1994, QS-9000 and ISO 16012:1992. When specified contractually, the requirements of IEC 61311, IEC 61310 App. B and IEC 61311 are also covered.

Transcat will maintain and document the traceability of all its standards to the National Institute of Standards and Technology (NIST) or the National Research Council of Canada (NRC), or to other recognized national or international standard bodies (NMIs), or to comparable conditions created in our laboratory, or accepted fundamental and/or natural physical constants, rate type of calibration, or by comparison to consensus standards. The specific path of traceability for the reported measurement results is maintained at the Transcat facility and is available there for review.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are shown below.

The results in this report relate only to the item calibrated or tested, and the determination of fit or out of tolerance is specific to the model/material no. referenced above based on the manufacturer's published specifications.

All calibrations have been performed using equipment having a best uncertainty ratio of four or more times greater than the units calibrated, unless otherwise noted. Uncertainties have been estimated at a 95 percent confidence level (k=2). Calibration is a 4:1 TUR, provided reasonable evidence that the measurement is within the manufacturer's published specifications. Limitations on the use of this instrument are detailed in the manufacturer's operating instructions. Any number of devices can come a unit to drift out of tolerance at any time following its calibration.

**Notes:** Limited Calibration: "Limitations on this calibration are: Sweep time is +/- 6%, and Frequency is +/- 10%, approved by (Brent Lawrence, 02/28/2007)." Risetime measurements are calibrated traceable, not accredited.

Assets	Manufacturer	Model	Description	Cal Date	Due Date	Traceability Numbers
5346	Fluke Corporation	5520A-SC1100	Multifunction Cal. w/ Scope Op	03/13/2006	03/31/2007	F3094007
TEMP02	Oakton Instruments	35710-10	RH/Temperature Datalogger	01/25/2007	01/31/2008	6-V10A4-1-1

**Calibrated at:**  
1181 Brittmore  
Houston, TX 77043  
By: Jimmy Shipley

**Facility Responsible:**  
1181 Brittmore  
Houston, TX 77043  
713-465-4399

Michael A. Sublett  
Lab Manager  
Date: 2/28/07

This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

FOURTH QUARTER  
Certificate - Page 1 of 1



## SUPPLEMENTAL REPORT FOR 5-V2024-2-1

### CALIBRATION LAB DATA AS FOUND / AS LEFT

RA Nbr: 5-V2024-2-1	Mfg: Instek Good Will Instruments
Description: Frequency Counter, 120 MHz, 1 Channel	Model: GFC-8010H
Customer: FUGRO CONSULTANTS LP	Serial: CF871549
Calibrated: Feb 28, 2007	PO Nbr: D111
Date Due: Feb 28, 2008	ID Nbr: NONE
Service Type: S6	Calibration Proc: I-AC17352-0

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found / As Left	O Q T	Uncertainty (k=2; ±)	TUR
Frequency Accuracy								
Frequency Accuracy	10.000000 MHz	±( 12 PPM Rdg)	9.999880	10.000120	10.000007 MHz			
Input Sensitivity								
10 Hz to 10 MHz < (15 mVrms)			P	P	P			
10 MHz to 40 MHz < (20 mVrms)			P	P	P			
40 MHz to 80 MHz < (35 mVrms)			P	P	P			
80 MHz to 120 MHz < (50 mVrms)			P	P	P			

When uncertainties are provided, the uncertainty only includes the measurement process and does not include uncertainty contributions of the instrument under test.

Field not applicable. Calibration Lab Data Report - Page 1 of 1 RA Nbr: 5-V2024-2-1

Volume 2, Rev. 0 - 7/18/2008

Page 72 of 155

DCN# EXE808

# TRANSCAT®

CALIBRATION SERVICES - TEST & MEASUREMENT INSTRUMENTS



01V202300

PICK LIST

PAGE 1  
16:05:11 02/28/07  
PL Run 852503

1181 BRITTMOORE  
SUITE 600  
HOUSTON TX 77043

Ship FUGRO CONSULTANTS LP  
To: 6100 HILLCROFT  
HOUSTON TX 77081

Order 02/27/07  
3/09/07  
DSNYDER MSUBLETT

Co/Cust 01/0000525293 P.O. No D111 Order No V2023/00 Ship Via UPS GROUND WH 05

Item Number/Description	Ordered	Shipped	E/C	U/M	Loc	Qty
Contact BRENT LAWRENCE			7133695400			
Carrier: UPS GROUND						
001 ED1801-6 Cal&Data-EZ Digital, Inc mdl:OS -5020G OSCILLOSCOPE	1.000	1.000			EA	BELOW
LOC: 22,99.99						
S/N:3080209 UNIT ID:						
1 YEAR CALIBRATION INTERVAL						
TURNAROUND TIME - 7 BUSINESS DAYS AFTER RECEIPT OF ORDER						
Thank you!! Denise Snyder 800-828-1470 x 9505						
Fax: 800-395-0543 E-Mail: dsnyder@transcat.com						
* COMPLETE *						

Equal Opportunity/Affirmative Action Employer, H/V

PICK

## CERTIFICATE OF CALIBRATION

Customer: FUGRO CONSULTANTS LP  
6100 HILLCROFT  
HOUSTON, TX 77081

Customer Nbr: 1-525293-000

Cert/RA Nbr: 5-V2024-2-1  
Manufacturer: Instek Good Will Instruments  
Description: Frequency Counter, 120 MHz, 1 Channel  
Model Nbr: GFC-8010H  
Serial Nbr: CF871549  
ID Nbr: NONE  
PO Nbr: D111

Date Received: Feb 27, 2007  
Date Calibrated: Feb 28, 2007  
Next Calibration: Feb 28, 2008  
Calibration Proc: 1-AC17352-0  
Item Received: In Tolerance  
Item Returned: In Tolerance

For calibration data, see Supplemental Report for RA Nbr 5-V2024-2-1

Temperature: 72°F / 22.2°C

Relative Humidity: 47%

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2005. Accredited calibrations performed within the Lab's Scope of Accreditation are indicated by the presence of the Accrediting Body's Logo and Certificate Number on this Certificate of Calibration. Any measurements on an accredited calibration are not covered by this Lab's Scope are noted below.

Transcat calibrations, as applicable, are performed in compliance with the requirements of ISO 9001:2000, ISO TS16949, ANSI/ASQ Z540-1994, QS-9000 and ISO 10012:1993. When specified contractually, the requirements of 10CFR21, 10CFR50 App. B and NQA-1 are also covered.

Transcat will maintain and document the traceability of all its standards to the National Institute of Standards and Technology (NIST) or the National Research Council of Canada (NRC), or to other recognized national or international standard bodies (NMI), or to measured in conditions created in our laboratory, or accepted fundamental and/or related physical constants, via the type of calibration, or by comparison to consistent standards. The specific path of traceability for the reported measurement results is maintained at the Transcat facility and is available there for review.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are shown below.

The results in this report relate only to the item calibrated or tested, and the description of it or set of materials is specific to the model/serial no. referenced above based on the manufacturer's published specifications.

All calibrations have been performed using processes having a shot uncertainty ratio of four or more times greater than the unit calibrated, unless otherwise noted. Uncertainties have been estimated at a 95 percent confidence level (k=2). Calibration at a 6(1) TLR provides reasonable confidence that the instrument is within the manufacturer's published specifications. Limitations on the use of this instrument are detailed in the manufacturer's operating instructions. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration.

Notes:

Assets	Manufacturer	Model	Description	Cal Date	Due Date	Traceability Numbers
5219	Agilent/HP/Agilent Tech	8902A	Measuring Receiver	11/20/2006	11/30/2007	1-496265449-1
5346	Fluke Corporation	5520A-SC1100	Multifunction Cal. w/ Scope Op	03/13/2006	03/31/2007	F3094007
J568	Agilent/HP/Agilent Tech	11722A	Sensor Module, 100k-2.6GHz	03/30/2006	03/31/2007	1-270725701-1
TEMP02	Oakton Instruments	35710-10	RH/Temperature Datalogger	01/25/2007	01/31/2008	6-V10A4-1-1

Calibrated at:

1181 Brittmore  
Houston, TX 77043  
By: Jimmy Shipley

Facility Responsible:

1181 Brittmore  
Houston, TX 77043  
713-465-4399

Michael A. Sublett  
Lab Manager

Date

This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

81117118 1/30/2006  
Certificate - Page 1 of 1

# TRANSCAT®

CALIBRATION SERVICES • TEST & MEASUREMENT INSTRUMENTS



01V202400

PICK LIST

PAGE 1  
16:05:03 02/28/07  
PL Run 852502

35 VANTAGE POINT DR  
ROCHESTER NY 14624

Ship FUGRO CONSULTANTS LP  
To: 6100 HILLCROFT  
HOUSTON TX 77081

Order 02/27/07  
3/02/07  
DSNYDER MSUBLETT

Co/Cust  
01/0000525293

P.O. No  
D111

Order No  
V2024/00

Ship Via  
DO NOT SHIP


WH

01

Item Number/Description	Ordered	Shipped	E/O	U/M	Loc Seq
Contact BRENT LAWRENCE				7133695400	
Carrier: DO NOT SHIP					
001 GFC8010H FREQUENCY COUNTER 120MHZ	1.000	1.000	000	EA	BELOW
LOC: T .14.05					
002 EHP016 CalData-Instek Good Will Instr uments Mdl.GFC-8010H, FREQUENCY	1.000	1.000	000	EA	BELOW
LOC: OS.01.01					
***** PLEASE SHIP TO HOUSTON LAB UPS RED EARLY AM					
MIKE SUBLETT WILL CALIBRATE TOMORROW 2/28/07					
1 YEAR CALIBRATION INTERVAL					
* COMPLETE *					

Equal Opportunity/Affirmative Action Employer, H/V

PICK



THE AMERICAN ASSOCIATION FOR  
LABORATORY ACCREDITATION

**ACCREDITED LABORATORY**

A2LA has accredited

**INTERFACE, INC.**  
**Scottsdale, AZ**

for technical competence in the field of **Calibration**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This laboratory also meets the requirements of ANSI/NCSL Z540-1-1994 and any additional program requirements in the field of calibration. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (*refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005*).

Presented this 18<sup>th</sup> day of October 2006.

President  
For the Accreditation Council  
Certificate Number 1991.01  
Valid to November 30, 2008.



For the calibrations to which this accreditation applies, please refer to the laboratory's Calibration Scope of Accreditation.



# American Association for Laboratory Accreditation

## SCOPE OF ACCREDITATION TO ISO 17025:2005 & ANSI/NCSL Z540-1:1994

INTERFACE, INC.  
7401 E. Butherus Drive  
Scottsdale, AZ 85260  
LaVar Clegg Phone: 480 948 5555 ext 106

### CALIBRATION

Valid To: November 30, 2008

Certificate Number: 1991.01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following calibrations<sup>1</sup>:

#### I. Mechanical

Parameter/Equipment	Range	Best Uncertainty <sup>2</sup> (±)	Comments
Force – Load Cells, Force Transducers	(200 to 240 000) lbf	0.035 % reading	Load cells
	(100 to 1100) lbf	0.050 % reading	
	(240 000 to 1 000 000) lbf	0.041 % reading	
	(1 to 500) lbf	0.040 % reading	Free weights
	(25 to 1100) lbf	0.030 % reading	Actuated weights
Mass – Measure	(10 to 550) lbf	0.021 % reading	Actuated weights (stainless steel)
	(25 to 2000) gf	0.030 % reading	Free weights
Dead Weight	(1 to 25) lb (25 to 100) lb	0.0032 % 0.0085 %	Transfer method using load cells

*Signature M. Robinson*

(A2LA Cert. No. 1991.01) 10/18/2006

Page 1 of 2





## II. Electrical - DC &amp; Low Frequency

Parameter/Equipment	Range	Best Uncertainty <sup>2</sup> ( $\pm$ )	Comments
DC Voltage - Measure	(0 to 0.14) V (0.14 to 1.4) V (1.4 to 14) V (14 to 140) V	0.0026 % + 0.2 $\mu$ V 0.0024 % + 2 $\mu$ V 0.0022 % + 20 $\mu$ V 0.0022 % + 200 $\mu$ V	Solartron 7071
DC Voltage Ratio	(0 to 0.1) V	0.0007 % rdg + 0.1 $\mu$ V/V <sub>ref</sub>	Kelvin-Varley divider
Resistance - Measure	(0 to 1.4) k $\Omega$ (0.14 to 1.4) k $\Omega$ (1.4 to 14) k $\Omega$ (14 to 140) k $\Omega$ (140 to 1400) k $\Omega$	0.0026 % + 0.2 m $\Omega$ 0.0026 % + 2 m $\Omega$ 0.0026 % + 20 m $\Omega$ 0.0028 % + 0.2 $\Omega$ 0.0036 % + 2 $\Omega$	Solartron 7071

<sup>1</sup> This laboratory offers commercial calibration service.

<sup>2</sup> "Best Uncertainty" is the smallest uncertainty of measurement that a laboratory can achieve within its scope of accreditation when performing more or less routine calibrations of nearly ideal measurement standards of nearly ideal measuring equipment. Best uncertainties represent expanded uncertainties expressed at approximately the 95 % level of confidence, usually using a coverage factor of  $k = 2$ . The best uncertainty of a specific calibration performed by the laboratory may be greater than the best uncertainty due to the behavior of the customer's device and to influences from the circumstances of the specific calibration.

*Russell M. Robinson*





# LOAD CELL-INDICATOR SYSTEM CALIBRATION CERTIFICATE

Customer : FUGRO GEOSCIENCES, INC.  
 Address : Houston, TX 77074  
 Condition : AS FOUND & FINAL  
 Load Cell Model: 1211EX-10K-B  
 Capacity : 10000 lbf  
 Indicator Model: INTERFACE 9820-000-1  
 Excitation : 10 VDC

S.O. # : 71644

Procedure: C-1761  
 P.O. # : CREDIT CARD  
 Serial : 113655

Serial : M2635  
 Count-By : 1

## TEST CONDITIONS

TEMPERATURE: 75 °F HUMIDITY: 30 %

## TRACEABILITY

FORCE STANDARD : STD-18  
 STANDARD INDICATOR: BRD106

NIST #: 822/273975-06  
 NIST #: 496182

DUE: 15-SEP-09

## SHUNT CALIBRATION

	Shunt KOhm	Reading	Connections
Tension		N/A lbf	
Compression	30.1	6779 lbf	Internal

## PERFORMANCE

TEST LOAD ( lbf)	RECORDED READINGS	
	Tension	Compression
0		0
2000		1998
4000		3997
6000		5997
8000		7999
10000		10000
4000		4001
0		0

Interface, Inc. certifies that force measurements are traceable to primary standards at NIST. Calibration performed per Interface QA program and the requirements of ISO/IEC 17025, MIL-STD-45662A & ANSI/NCSL 2540-1:1994. Estimated measurement uncertainty is 0.040% NDC, expressed as the expanded uncertainty at 95% confidence level using a coverage factor of k=2. Results relate to above serial numbers only.  
 DO NOT REPRODUCE THIS REPORT except in full or with Interface, Inc. written approval.

TECHNICIAN :  Josh Smith

DATE :09-MAR-07

INTERFACE INC.  
 7401 EAST BUTHERUS DRIVE · SCOTTSDALE, ARIZONA 85260, U.S.A.  
 TELEPHONE (480)948-5555 · FAX (480)948-1924



# CERTIFICATE OF CALIBRATION

Certificate Number M503691-1

Manufacturer: Geotac  
Model No: 560K  
Customer PO No.: L-2416

Description: Load Cell  
Serial No: 129739  
Customer Asset No.: 129739

Customer:  
Fugro Consultants LP  
6100 Hillcroft  
Houston, TX 77081

Location of Calibration:  
Applied Technical Services, Inc.  
1049 Triad Court  
Marietta, GA 30062

Calibration Procedure: **ATS-521 Rev. 5: Calibration of Force Gages**

Date of Calibration: **November 28, 2006**  
Temperature: **70° F**  
Condition Received: **As Found Data Only**

\*Next Calibration Due: **November 28, 2007**  
Humidity: **29 %**  
Condition Returned: **As Found Data Only**

This instrument has been calibrated using primary or secondary standards whose calibration is traceable to the International System of Units (SI) through the National Institute of Standards and Technology (NIST). Some measurements are traceable to natural physical constants, consensus standards or ratio type measurements.

The reported expanded measurement uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k=2$ , providing a confidence level of approximately 95%. ATS maintains, wherever possible, at least a 4:1 Test Uncertainty Ratio. Statements of compliance, where applicable, are based on test results falling within specified limits with no reduction by the uncertainty of the measurement, unless otherwise allowed by procedure.

All calibrations are performed in accordance with the ATS Quality Manual QM1, Rev. 7 dated July 7, 2006. Applied Technical Services, Inc.'s Quality System complies with the applicable requirements of ANSI/NCSL Z540-1, ISO 9001-2000, 10CFR 50 Appendix B, 10CFR Part 21 and ISO/IEC 17025. ATS is an ISO/IEC 17025 Accredited Calibration Laboratory through A2LA.

The reported data is valid only at the time of the test and related only to the item calibrated. \*Calibration due dates appearing on this Certificate of Calibration and calibration label are determined by the client and do not imply continued conformance to specifications.

This certificate shall not be reproduced except in full, without the permission of Applied Technical Services, Inc.

Notes: *Gage Factor = -2.1826mV/V*

### Calibration Equipment Used::

Model: Tinius Olsen Super L Desc.: Universal Testing Machine ID No.: **ATS-01226** Cal Due Date: **2/11/2007**

Calibrated by:

Christopher A. Gerlach  
Senior Calibration Technician



# APPLIED TECHNICAL SERVICES, INCORPORATED

## CALIBRATION DATA SHEET

Page 2 of 2

Customer: Fugro Consultants Purchase Order No.: L-2416  
 Item Name: Load Cell w/o Display Asset No.: 129739 ATS Reference No.: M503691-1  
 Manufacturer: GeoTac Model No.: 50Klbs Proc. No.: 521 Rev.: 5  
 Serial No.: 129739 Calibration Date: 11/28/06 Calibration Due Date: 11/28/07

Reason For Service:  Initial Calibration  Due For Calibration  Repair and Calibration

Equipment Used: ATS-01226 Due: 02/11/07 Universal Testing Machine  
 \_\_\_\_\_ Due: \_\_\_\_\_  
 \_\_\_\_\_ Due: \_\_\_\_\_  
 \_\_\_\_\_ Due: \_\_\_\_\_  
 \_\_\_\_\_ Due: \_\_\_\_\_  
 \_\_\_\_\_ Due: \_\_\_\_\_

Calibrated By: *[Signature]*

### Customer Instrument Under Test

UNCERTAINTY (SEE NOTE) g	RANGE Lbs	ATS STANDARD Lbs	TOLERANCE Lbs	AS FOUND READING mV	AS CALIBRATED READING Lbs
0.03%	50000	(Comp.) 5000.000	As Found Data Only	-2.176	Same as - As Found
0.03%		10000.000	As Found Data Only	-4.358	Same as - As Found
0.03%		20000.000	As Found Data Only	-8.722	Same as - As Found
0.03%		30000.000	As Found Data Only	-13.092	Same as - As Found
0.03%		40000.000	As Found Data Only	-17.479	Same as - As Found
0.03%		50000.000	As Found Data Only	-21.826	Same as - As Found
Excitation (Before)	10.0000VDC				
Excitation (After)	10.0000VDC				
Zero (Before)	0.000				
Zero (After)	0.000				
Gage Factor	-2.1826mV/V				

\* Indicates out of tolerance readings.

Remarks: Measurement Uncertainty reported at coverage factor K = 2 or 95% confidence level.

A= + Excitation B= -Excitation C= + Output D= -Output



# LOAD CELL CALIBRATION CERTIFICATION

CUSTOMER : FUGRO CONSULTANTS INC.  
ADDRESS : Houston, TX 77081  
CONDITION: AS FOUND & FINAL S.O. #: 78664 P.O. #: L-2563  
MODEL: FT451-50K SERIAL: 129739 BRIDGE: A CAPACITY: 50 K1bf  
PROCEDURE: C-1257

INPUT RESISTANCE: 376.3 OHM OUTPUT RESISTANCE: 354.7 OHM  
ZERO BALANCE : 0.166 %RO

### TEST CONDITIONS

TEMPERATURE: 74 °F HUMIDITY: 30 % EXCITATION: 10 VDC

### TRACEABILITY

FORCE STANDARD : STD-14 NIST #: 822/273338-06 DUE: 15-MAR-10  
STANDARD INDICATOR: BRD295 NIST #: 512727  
TEST INDICATOR : BRD297 NIST #: 512727

### SHUNT CALIBRATION

	Shunt (± 0.01%)	Output	Straight Line Conversion	Connections*
Tension	Kohm	.00000 mV/V	.0000 K1bf	
Compression	60 Kohm	-1.46285 mV/V	33.650 K1bf	-Out to +Exc

\*For models wired with +Sense, -Sense, or -SCal leads, resistor connections are actually to these leads in place of +Exc, -Exc, or -Out respectively.


### PERFORMANCE

	RATED OUTPUT	SEB OUTPUT	NONLINEARITY	HYSTERESIS	SEB
TENSION	.00000 mV/V	.00000 mV/V	.000 %FS	.000 %FS	± .000 %FS
COMPRESSION	-2.17387 mV/V	-2.17364 mV/V	-.027 %FS	.045 %FS	± .022 %FS

STATIC ERROR BAND (SEB) - The band of maximum deviations of the ascending and descending calibration points from a best fit straight line through zero output. It includes the effects of NONLINEARITY, HYSTERESIS, and nonreturn to MINIMUM LOAD.

TEST LOAD APPLIED ( K1bf)	RECORDED READINGS (mV/V)	
	Tension	Compression
0	.00000	
10	-.43434	
20	-.86897	
30	-1.30378	
40	-1.73876	
50	-2.17387	
20	-.86994	
0	-.00018	

Interface Inc. certifies that force measurements are traceable to primary standards at NIST. Calibration performed per Interface DA program and the requirements of ISO/IEC 17025, MIL-STD-45662A & ANSI/NCS Z540-3:1994. Estimated measurement uncertainty is 0.040% expressed as the expanded uncertainty at 95% confidence level using a coverage factor of k=2. Results relate to load cell serial 129739 only.  
DO NOT REPRODUCE THIS REPORT EXCEPT IN FULL WITH INTERFACE INC. WRITTEN APPROVAL.

TECHNICIAN :  Josh Smith DATE : 14-MAR-08

INTERFACE INC.  
7401 EAST BUTHERUS DRIVE • SCOTTSDALE, ARIZONA 85260, U.S.A.  
TELEPHONE (480)948-5555 • FAX (480)948-1924



# LOAD CELL CALIBRATION CERTIFICATION

CUSTOMER : FUGRO CONSULTANTS INC.  
ADDRESS : Houston, TX 77081  
CONDITION: FINAL  
MODEL: FT451-50K  
PROCEDURE: C-1257  
S.O. #: 78664 P.O. #: L-2563  
SERIAL: 129739 BRIDGE: A CAPACITY: 12.5 K1bf

INPUT RESISTANCE: 374.7 OHM  
ZERO BALANCE : -0.386  $\%R0$   
OUTPUT RESISTANCE: 353.0 OHM

### TEST CONDITIONS

TEMPERATURE: 75 °F HUMIDITY: 30 % EXCITATION: 10 VDC

### TRACEABILITY

FORCE STANDARD : STD-22 NIST #: 822/275431-07 DUE: 15-SEP-11  
STANDARD INDICATOR: BRD106 NIST #: 512727  
TEST INDICATOR : BRD300 NIST #: 512727

### SHUNT CALIBRATION

	Shunt ( $\pm 0.01\%$ )	Output	Straight Line Conversion	Connections*
Tension	60 Kohm	1.46154 mV/V	33.590 K1bf	-Out to -Exc
Compression	Kohm	.00000 mV/V	.0000 K1bf	

\*For models wired with +Sense, -Sense, or -SCal leads, resistor connections are actually to these leads in place of +Exc, -Exc, or -Out respectively.


### PERFORMANCE

	RATED OUTPUT	SEB OUTPUT	NONLINEARITY	HYSTERESIS	SEB
TENSION	.54411 mV/V	.54388 mV/V	-.073 %FS	.066 %FS	$\pm .044$ %FS
COMPRESSION	.00000 mV/V	.00000 mV/V	.000 %FS	.000 %FS	$\pm .000$ %FS

STATIC ERROR BAND (SEB) - The band of maximum deviations of the ascending and descending calibration points from a best fit straight line through zero output. It includes the effects of NONLINEARITY, HYSTERESIS, and nonreturn to MINIMUM LOAD.

TEST LOAD APPLIED ( K1bf)	RECORDED READINGS (mV/V)	
	Tension	Compression
0.0	.00000	
2.5	.10868	
5.0	.21743	
7.5	.32609	
10.0	.43489	
12.5	.54411	
5.0	.21779	
0.0	.00026	

Interface Inc. certifies that force measurements are traceable to primary standards at NIST. Calibration performed per Interface QA program and the requirements of ISO/IEC 17025, NIST 86-3092A & ANSI/INC-12540-1:1994. Estimated measurement uncertainty (1SD) (k=2), expressed as the expanded uncertainty at 95% confidence level, using a coverage factor of k=2. Results relate to load cell serial 129739 only.  
DO NOT REPRODUCE THIS REPORT except in full or with Interface Inc. written approval.

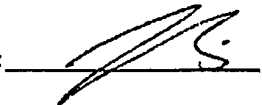TECHNICIAN :  Josh Smith DATE : 14-MAR-08

INTERFACE INC.  
7401 EAST BUTHERUS DRIVE • SCOTTSDALE, ARIZONA 85260, U.S.A.  
TELEPHONE (480)948-5555 • FAX (480)948-1924

# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

**Fugro Consultants LP**

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Manufacturer: Eaton

Sales Order: 216724

Page 1 of 6

Model Number: UPS3000CC

Serial Number: A0813

ID Number: XPE-001


Preceding the calibration, the elastic element of this gauge was exercised and zero was adjusted. The horizontal plane of reference for pressure measurement is at the centerline of the test port.

The calibration and traceability of the transfer standards used in this calibration are maintained according to Quality Manual (QMS-001) Revision R (12/14/2005). The measurement results are traceable through an unbroken chain of comparisons to reference standards developed and maintained by the National Institute of Standards and Technology. The uncertainty reported with the data is the expanded uncertainty, and is based on the standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

This calibration was performed at the GE Infrastructure Sensing Houston facility. At the time of the calibration, the environmental conditions were 21 °C, 60%RH, and 101 kPa. The best estimate of gravitational acceleration at the site of calibration was 9.792778 m/s<sup>2</sup>.

The calibration procedure CS-125 Revision D satisfies the requirements of ANSI/NCSL Z540-1-1994, ISO 9001, ISO/IEC 17025:1999 (E), NIST Handbook 150, and MIL-STD-45662A.

This report shall not be reproduced, except in full, without the written permission of the issuing laboratory.

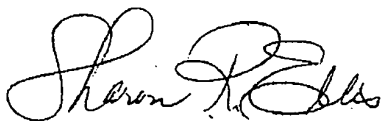

Approved by: Sharon R. Ellis  
Calibration Technician

Calibrated by: Joseph P. Balliew  
Calibration Technician



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338

# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

**Fugro Consultants LP**

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Page 2 of 6  
Full Scale: 250 psi gauge

### As Found Calibration Data

Calibration Date: September 15, 2006

Calibration Standard: PC-89, WS-12, and WS-27

Medium: nitrogen

Applied psi	Uncertainty psi	Displayed psi
0.00	0.0E+00	0.00
124.6680	1.4E-03	124.70
249.579	2.7E-03	249.65
124.6680	1.4E-03	124.65
0.00	0.0E+00	0.05

*Note: The instrument was not adjusted prior to the above data being recorded. An asterisk denotes a point that is out of tolerance.*



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338

# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

**Fugro Consultants LP**

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Page 3 of 6  
Full Scale: 100 psi gauge

### As Found Calibration Data

Calibration Date: September 15, 2006

Calibration Standard: PC-67, WS-12, and WS-27

Medium: nitrogen

Applied psi	Uncertainty psi	Displayed psi
0.00	0.0E+00	0.00
49.8390	5.0E-04	49.80
99.9320	1.0E-03	99.88
49.8400	5.0E-04	49.76
0.00	0.0E+00	0.00

*Note: The instrument was not adjusted prior to the above data being recorded. An asterisk denotes a point that is out of tolerance.*



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338



# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

**Fugro Consultants LP**

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Page 4 of 6  
Full Scale: 500 psi gauge

### As Found / As Left Calibration Data

Calibration Date: September 15, 2006

Calibration Standard: PC-89, and ,WS-12

Medium: nitrogen

Applied psi	Uncertainty psi	Displayed psi
0.0	0.0E+00	0.0
124.6700	1.4E-03	124.7
249.580	2.7E-03	249.6
374.330	4.1E-03	374.4
499.070	5.5E-03	499.2
249.580	2.7E-03	249.6
0.0	0.0E+00	0.1

Notes: *The instrument was not adjusted.*



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338

# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

### Fugro Consultants LP

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Page 5 of 6  
Full Scale: 250 psi gauge

### As Left Calibration Data

Calibration Date: September 15, 2006

Calibration Standard: PC-89, WS-12, and WS-27

Medium: nitrogen

Applied psi	Uncertainty psi	Displayed psi
0.00	0.0E+00	0.00
61.7960	6.8E-04	61.80
124.6680	1.4E-03	124.65
186.5430	2.1E-03	186.55
249.579	2.7E-03	249.60
124.6680	1.4E-03	124.65
0.00	0.0E+00	0.00

Notes: The instrument was adjusted prior to recording the above data.



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338

# GE Infrastructure Sensing

## Calibration Report 060915A0813

Digital Pressure Indicator

for

**Fugro Consultants LP**

6100 Hillcroft  
Houston, TX 77081

Date of Issue: September 15, 2006

Page 6 of 6  
Full Scale: 100 psi gauge

### As Left Calibration Data

Calibration Date: September 15, 2006

Calibration Standard: PC-67, WS-12, and WS-27

Medium: nitrogen

Applied psi	Uncertainty psi	Displayed psi
0.00	0.0E+00	0.00
24.86100	2.5E-04	24.84
49.8390	5.0E-04	49.84
74.9860	7.5E-04	74.98
99.9310	1.0E-03	99.96
49.8390	5.0E-04	49.82
0.00	0.0E+00	0.00

Notes: *The instrument was adjusted prior to recording the above data.*



General Electric Company  
10311 Westpark Drive  
Houston, TX 77042  
USA

T 713 975 0547  
F 713 975 6338



**SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999**

**GE Infrastructure Sensing**  
 10311 Westpark Drive  
 Houston, TX 77042-5312  
 Mr. Kenneth A. Kolb  
 Phone: 713-975-0547 Fax: 713-975-6338  
 E-mail: kenneth.kolb@ge.com  
 URL: <http://www.gesensing.com>

**CALIBRATION LABORATORIES**

**NVLAP LAB CODE 200491-0**

*NVLAP Code:* 20/A01                      ANSI/NC SL Z540-1-1994; Part 1    Compliant

**MECHANICAL**

*NVLAP Code:* 20/M08  
 Mass

Calibration of Primary Piston Gauge Masses

<i>Range</i>	<i>Best Uncertainty (<math>\pm</math>) Relative to Indicated Value <sup>note 1</sup></i>	<i>Remarks</i>
1 mg to 17 kg	$5.0 \times 10^{-6}$ but not less than 0.5 mg	Substitution – Mechanical
1 mg to 1.2 kg	$5.0 \times 10^{-6}$ but not less than 0.5 mg	Substitution – Electronic

Calibration of Secondary Piston Gauge Masses

1 mg to 8.0 kg	$2.0 \times 10^{-5}$ but not less than 0.5 mg	Substitution – Electronic
1 mg to 1.2 kg	$2.0 \times 10^{-5}$ but not less than 0.5 mg	Direct Reading - Electronic
1.2 kg to 8 kg	$2.0 \times 10^{-5}$ but not less than 43 mg	Direct Reading – Electronic

2006-01-01 through 2006-12-31

*Effective dates*

*For the National Institute of Standards and Technology*



# National Voluntary Laboratory Accreditation Program



CALIBRATION LABORATORIES

NVLAP LAB CODE 200491-0

## THERMODYNAMICS

NVLAP Code: 20/T05

Pressure

Pneumatic Pressure using Primary Piston Gauge <sup>note 1</sup>

Range	Best Uncertainty ( $\pm$ ) of Reading <sup>note 1</sup>	Remarks
-100 kPa to -1.38 kPa	$1.0 \times 10^{-5}$ but not less than 0.07 Pa	Negative Gauge Mode
-16 kPa to 16 kPa	$1.1 \times 10^{-5}$ but not less than 0.034 Pa	Differential Mode
1.38 kPa to 1.4 MPa	$1.0 \times 10^{-5}$ but not less than 0.07 Pa	Gauge Mode <sup>note 4</sup>
1.4 MPa to 7 MPa	$1.1 \times 10^{-5}$ but not less than 2.8 Pa	Gauge Mode <sup>note 4</sup>
7 MPa to 21 MPa	$1.1 \times 10^{-5} + 1.9 \times 10^{-7}$ per MPa	Gauge Mode
21 MPa to 104 MPa	$3.5 \times 10^{-5}$	Gauge Mode

Pneumatic Effective Area Determination using Primary Piston Gauge <sup>note 2</sup>

Range	Best Uncertainty ( $\pm$ ) of Reading <sup>notes 1, 7</sup>	Remarks
1.38 kPa to 345 kPa	$8.8 \times 10^{-6}$	
11.72 kPa to 1.4 MPa	$8.3 \times 10^{-6}$	
14 kPa to 7 MPa	$1.0 \times 10^{-5} + 2.4 \times 10^{-7}$ per MPa <sup>note 3</sup>	
700 kPa to 21 MPa	$1.0 \times 10^{-5} + 4.8 \times 10^{-7}$ per MPa <sup>note 3</sup>	
1.17 MPa to 104 MPa	$3.37 \times 10^{-5}$	

Pneumatic Pressure using Precision Transducer <sup>note 2</sup>

Range	Best Uncertainty ( $\pm$ ) of Reading <sup>note 1</sup>	Remarks
0 Pa to 133 Pa	0.133 Pa	Absolute Mode
-16 kPa to 16 kPa	$5.0 \times 10^{-5}$ but not less than 0.035 Pa	Differential Mode
-100 kPa to 17 MPa	$6.5 \times 10^{-5}$ but not less than 0.22 Pa	Gauge Mode <sup>note 5</sup>

2006-01-01 through 2006-12-31

Effective dates

For the National Institute of Standards and Technology



**National Voluntary  
Laboratory Accreditation Program**



**CALIBRATION LABORATORIES**

**NVLAP LAB CODE 200491-0**

Pneumatic Effective Area Determination using Precision Transducer *note 2*

20 Pa to 17 MPa                       $7.2 \times 10^{-5}$  but not less than 0.05 Pa

Pneumatic Deadweight Tester Output Pressure Conformance using Precision Transducer *note 2*

**Range**                                      **Best Uncertainty ( $\pm$ ) of Reading** *notes 1, 8*                      **Remarks**

20 Pa to 17 MPa                       $7.5 \times 10^{-5}$  but not less than 0.053 Pa

Hydraulic Pressure using Primary Piston Gauge *note 2*

**Range**                                      **Best Uncertainty ( $\pm$ ) of Reading** *notes 1, 6*                      **Remarks**

50 kPa to 7 MPa	$2.5 \times 10^{-5}$ but not less than 10 Pa	Gauge Mode
7 MPa to 140 MPa	$3.5 \times 10^{-5}$	Gauge Mode
14 MPa to 280 MPa	$7.5 \times 10^{-5}$	Gauge Mode
280 MPa to 500 MPa	$1.0 \times 10^{-4}$	Gauge Mode

Hydraulic Effective Area Determination using Primary Piston Gauge *note 2*

**Range**                                      **Best Uncertainty ( $\pm$ ) of Reading** *note 1*                      **Remarks**

50 kPa to 7 MPa	$2.31 \times 10^{-5}$
7 MPa to 140 MPa	$3.34 \times 10^{-5}$
140 MPa to 280 MPa	$7.29 \times 10^{-5}$
280 MPa to 500 MPa	$9.80 \times 10^{-5}$

Hydraulic Effective Area Determination using Secondary Piston Gauge *note 2*

70 kPa to 140 MPa                       $7.2 \times 10^{-5}$

2006-01-01 through 2006-12-31

*Effective dates*

*For the National Institute of Standards and Technology*



**National Voluntary  
Laboratory Accreditation Program**



**CALIBRATION LABORATORIES**

**NVLAP LAB CODE 200491-0**

Hydraulic Deadweight Tester Output Pressure Conformance using Secondary Piston Gauge <sup>note 2</sup>

70 kPa to 140 MPa

$7.5 \times 10^{-5}$  but not less than 50 Pa

1. Represents an expanded uncertainty using a coverage factor,  $k = 2$ , at an approximate level of confidence of 95 %.
2. This capability includes on-site calibration service, as limited by influences of operating environment.
3. Component uncertainties are combined in quadrature.
4. For absolute mode, uncertainties increase by  $1.33E + 00$  Pa, combined in quadrature with stated level.
5. For absolute mode, uncertainties increase by  $1.88E + 00$  Pa, combined in quadrature with stated level.
6. For absolute mode, uncertainties increase by  $1.31E + 01$  Pa, combined in quadrature with stated level.
7. Calibration process may include the use of transducers to measure small differential pressures.
8. Conformance evaluation of Deadweight Tester output pressure compared to indicated pressure.

2006-01-01 through 2006-12-31

*Effective dates*

*For the National Institute of Standards and Technology*

## CERTIFICATE OF CALIBRATION

Customer: FUGRO CONSULTANTS INC  
6100 HILLCROFT  
HOUSTON, TX 77081

Customer Nbr: 1-525293-000  
PO Nbr: FO200708

Cert/RA Nbr: 5-V8842-1-1  
Manufacturer: Cole-Parmer  
Model Nbr: 8528-40  
Description: Thermometer, Type K

Date Received: Nov 16, 2007  
Date Calibrated: Nov 16, 2007  
Next Calibration: Nov 16, 2008  
Calibration Proc: 1-AC22434-0  
Item Received: In Tolerance  
Item Returned: In Tolerance

Serial Nbr: C95005824  
ID Nbr: TD 001

For calibration data, see Supplemental Report for RA Nbr 5-V8842-1-1

Temperature: 70°F / 21.1°C

Temp/RH Asset: temp02

Relative Humidity: 33%

Transcat Calibration Laboratories have been studied and found in compliance with ISO/IEC 17025:2005. Accredited calibrations performed within the Lab's Scope of Accreditation are indicated by the presence of the Accrediting Body's Logo and Certificate Number on this Certificate of Calibration. Any measurements on an accredited calibration not covered by that Lab's Scope are noted below.

Transcat calibrations, as applicable, are performed in compliance with the requirements of ISO 9001:2000, ISO TS16949, ANSI/NCSL Z540-1994, QS-9000 and ISO 10012-1992. When specified contractually, the requirements of 10CFR21, 10CFR50 App. B and NQA-1 are also covered.

Transcat will maintain and document the traceability of all its standards to the National Institute of Standards and Technology (NIST) or the National Research Council of Canada (NRC), or to other recognized national or international standard bodies (NMI's), or to measurable conditions created in our laboratory, or accepted fundamental and/or natural physical constants, radio type of calibration, or by comparison to consensus standards. The specific path of traceability for the reported measurement results is maintained at the Transcat facility and is available there for review.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are shown below.

The results in this report relate only to the item calibrated or tested, and the determination of in or out of tolerance is specific to the model/serial no. referenced above based on the manufacturer's published specifications.

All calibrations have been performed using processes having a test uncertainty ratio of four or more times greater than the unit calibrated, unless otherwise noted. Uncertainties have been estimated at a 95 percent confidence level (k=2). Calibration at a 4:1 TUR provides reasonable confidence that the instrument is within the manufacturer's published specifications. Limitations on the uses of this instrument are detailed in the manufacturer's operating instructions. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration.

Notes: Unit meets all manufacturers specifications. When using the K type probe with the unit, the readings were: @0.0°C/  
0.1°C @50.0°C/49.8°C @100.0°C/100.2°C

Assets	Manufacturer	Model	Description	Cal Date	Due Date	Traceability Numbers
5072	Fluke Corporation	5500A	Multi-Product Calibrator	5/7/2007	5/31/2008	5-&5072-3-8
5342	Hart Scientific	1502A	Thermometer, SPRT, -200° to 96	8/21/2007	8/31/2008	15-V54VR-1-1
5343	Hart Scientific	5626	Probe, Secondary Reference, PR	8/21/2007	8/31/2008	15-V54VR-1-1
K1TCW-11	Omega Engineering, Inc.	Type-K	Thermocouple Probe, Type-K	6/11/2007	12/31/2099	6-&K1TCW-507-11

Calibrated at:

1181 Brittmore  
Houston, TX 77043  
By: Thomas M. Laguna

Facility Responsible:

1181 Brittmore  
Houston, TX 77043  
713-465-4399

Michael A. Sublett  
Lab Manager  
Date: 11/16/07



# SUPPLEMENTAL REPORT FOR 5-V8842-1-1

## CALIBRATION LAB DATA AS FOUND / AS LEFT

RA Nbr: 5-V8842-1-1	Mfg: Cole-Parmer
Description: Thermometer, Type K	Model: 8528-40
Customer: FUGRO CONSULTANTS INC	Serial: C95005824
Calibrated: Nov 16, 2007	PO Nbr: FO200708
Date Due: Nov 16, 2008	ID Nbr: TD 001
Service Type: R6	Calibration Proc: 1-AC22434-0

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found / As Left	OT	Uncertainty (k=2; ±)	TUR
Temperature Measure								
Type K (ITS90)	-145.0 °C	±( 0.25% Rdg + 2 °C)	-147.4	-142.6	-145.2 °C			
	0.0 °C	±( 0.25% Rdg + 1 °C)	-1.0	1.0	-0.1 °C			
	450.0 °C	±( 0.25% Rdg + 1 °C)	447.9	452.1	450.1 °C			
	900.0 °C	±( 0.25% Rdg + 1 °C)	896.7	903.3	900.0 °C			
	1350 °C	±( 0.25% Rdg + 1 °C)	1346	1354	1350 °C			
Units Conversion	2462 °F	±( 0.25% Rdg + 1.8 °F)	2454	2470	2461 °F			

**Remarks:**

Unit meets all manufacturers specifications. When using the K type probe with the unit, the readings were: @0.0°C/ 0.1°C @50.0°C/49.8°C @100.0°C/100.2°C


When uncertainties are provided, the uncertainty only includes the measurement process and does not include uncertainty contributions of the instrument under test.

Field not applicable.

# QUALITY SYSTEM MANUAL

FOR

## HOUSTON GEOTECHNICAL LABORATORY

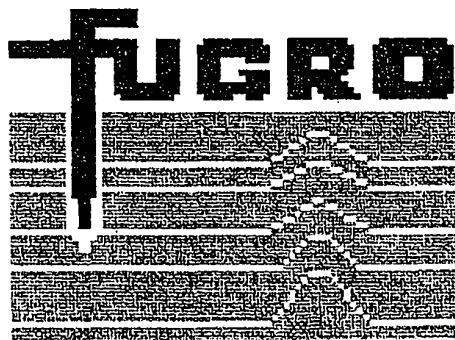

**CONTROL #: GEO-1**

**Fugro Consultants, Inc.**

6100 Hillcroft

Houston, Texas 77081

Phone: (713) 369-5400

Fax: (713) 369-5545

Document Revised: July 07, 2007

CALIBRATION EQUIPMENT OR REFERENCE STANDARDS			
Equipment Name	Calibration Interval	Check Interval	Procedure Used
Digital Micrometers & Mechanical Micrometers	2 years		Outside Source
Force Transducers	1 year		Outside Source
Metal Specimens	Verify Before Use or After Repair		HGL-2685
Pressure Gages	2 years		Outside Source
Set of Gage Blocks	5 years		Outside Source
Thermometers	1 year		Outside Source
Torque Transducers	2 years		Outside Source
Voltmeters/Multimeters (6.5 digit)	3 years		Outside Source

\*The term "calibration" is used to maintain consistency with ASTM D 3740. It is taken to mean "verification."

10-02-2007

11:21:31

1907-0067

10

AL

	0.00	0.00	0.00	1		
F7.5CKESW1576						
3	50.00	0.500	2.500	525.0		
0	-0.00013	-0.00119	0.00013	0.00400	-0.00006	
2	-0.00013	-0.00119	0.00013	0.00400		
4	-0.00013	-0.00119	0.00013	0.00400		
6	-0.00013	-0.00119	0.00013	0.00400		
8	0.01794	0.00013	0.00013	0.00262		
10	0.03737	0.00081	0.00013	0.00244		
12	0.06181	0.00031	0.00013	0.00213		
14	0.08025	0.00050	0.00013	0.00281		
16	0.08677	0.00456	0.00013	0.00269		
18	0.09328	0.01281	0.00019	0.00231		
20	0.09980	0.02656	0.00013	0.00212		
22	0.10631	0.09099	0.00019	0.00244		
24	0.29775	0.15541	0.00038	0.00225		
26	0.48094	0.21983	0.00038	0.00356		
28	0.49413	0.28426	0.00006	0.00400		
30	0.39231	0.34868	0.00019	0.00294		
32	0.37288	0.41310	0.00031	0.00525		
34	0.35475	0.47753	0.00000	0.00538		
36	0.32225	0.54195	0.00000	0.00556		
38	0.31706	0.60637	0.00006	0.00500		
40	0.26138	0.62738	0.00006	0.00594		
42	0.23619	0.62400	0.00013	0.00538		
44	0.21856	0.60164	0.00050	0.00544		
46	0.19506	0.57929	0.00050	0.00575		
48	0.17344	0.53070	0.00019	0.00581		
50	0.15519	0.48211	0.00075	0.00587		
52	0.14296	0.43353	0.00075	0.00500		
54	0.13073	0.38716	0.00013	0.00562		
56	0.11850	0.34079	0.00050	0.00581		
58	0.11916	0.29443	0.00062	0.00588		
60	0.11981	0.24806	0.00044	0.00500		
62	0.12047	0.22700	0.00019	0.00506		
64	0.12294	0.22131	0.00006	0.00519		
66	0.12406	0.20137	0.00006	0.00525		
68	0.12094	0.19737	0.00075	0.00538		
70	0.11187	0.19319	0.00156	0.00556		

**PRE JOB  
CALIBRATION  
VERIFICATION**

# CALIBRATION CERTIFICATE



APPLICANT FCI Houston Certificate number FC071310 Page 1 of 1  
 SUBMITTED **A Piezo Cone Penetrometer** Manufacturer Fugro Engineers B.V.  
 Device type CONE, A15F7.5CKEW2/B, 70 bar Serial number 1701-1498

The device contains an electronic data sheet which contains, amongst others, the characteristics of all the sensors inside the device. The data acquisition system calculates the measured value from these known characteristics. All calibration results are conform the values specified below.

## Force calibration

Calibration reference : 548 FRE.002  
 Procedure : FEBV.CAL.PRO.003 KALIBRATIE KRACHT  
 Title of channel(s) : Cone and Cone+Fric.  
 Max. load 150 kN

Range	Calibration range From to	Sensitivity Deviation	Zero load output
1	0 75 kN	< 0.5 %	< 1.50 kN
Calibration uncertainty		0.3 %	0.008 kN

## Pressure test :

Deviation from specified Alpha factor at 2.5 MPa	< 5 %
--	-------

## Cone quality control values :

Max. deviation from reference	< 1 %
Max. Tip to Sleeve friction Crosstalk	< 1 %

## Pressure calibration

Calibration reference : 3257-0001  
 Procedure : FEBV.CAL.PRO.004 KALIBRATIE DRUK  
 Title of channel : Pore 2  
 Max. load 10.5 Mpa

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 2.5 MPa	< 1.0 %	< 0.28 MPa
Calibration uncertainty		0.6 %	0.003 MPa
Pore 2 transducer : Kulite HKM 150-70bar SN : 7056-1-133			

## Calibration of the slope sensor

Calibration reference :  
 Procedure: FEBV.CAL.PRO.006 KALIBRATIE HELLING  
 Title of channel : Slope x

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 15 deg	< 10 %	< 1.5 deg
Calibration uncertainty		1 %	0.5 deg

## Typical values for this type of device

Cone diameter (mm)	43.7	Pore 2 position	2	Alpha factor	0.58
Cone area (square cm)	15	Sleeve length (mm)	144.7	Cone - Sleeve distance (mm)	14.4
Sleeve diameter (mm)	43.9	Sleeve area (square cm)	200	Cone - Pore 2 distance (mm)	6.0

TRACEABILITY The measurements have been executed using standards for which the traceability to primary and/or (inter)national standards has been demonstrated .

Calibrated by: Boer de, Kimmo


Approved by: Sinjorgo, Gerry

Calibration date: 03/12/2007

Approval date: 03/12/2007

Calibrate before: 27/11/2008

Template : 75CKEW2 70bar002 Updated : 8/11/2007 11:26:00 AM



# Calibration Verification Certificate




Device Type: Piezo Cone Penetrometer

Device Number: F7.5CKEW2/B 1701-1498

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>  
Tip readings in mV


Load lb	Load Tons	load/area tsf	Tip mV	TIP Cal Factor Mpa
0	0	0	0	0
595	0.2975	18.47826	35.3	50.1272162
6120	3.06	190.0621	363.9	50.0150484
8510	4.255	264.2857	505.6	50.0557325
10010	5.005	310.8696	595.3	50.0068526
15005	7.5025	465.9938	892.3	50.0099515
19985	9.9925	620.6522	1184.3	50.1849794

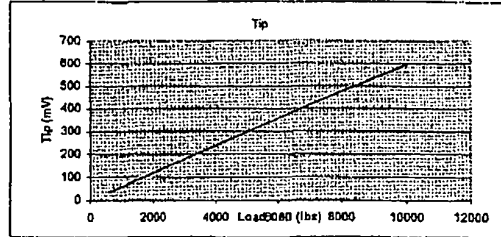

## FRICITION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>  
Friction readings in mV

Load lb	Load Tons	load/area tsf	Friction mV	Friction Cal Factor Mpa
0	0	0	0	0
520	0.26	1.207617	230.6	0.50148415
2490	1.245	5.782629	1101.3	0.50281344
3510	1.755	8.151417	1548.2	0.50418884
4990	2.495	11.58848	2191.6	0.50635188
7520	3.76	17.464	3286.3	0.50888987

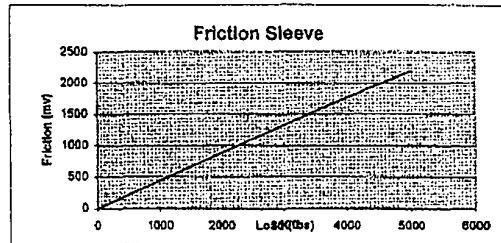


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial: 7056-1-133

Pore Pressure readings in mV

Pressure psi	Pressure tsf	Transducer readings mV	P.Pres. Cal Factor Mpa
0	0	0	0
75	5.4	207.8	2.48848722
150	10.8	414.3	2.49629565
300	21.6	827.8	2.49870812

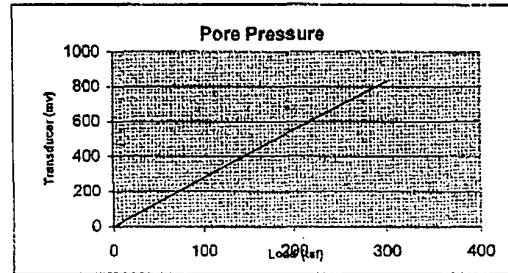

## Temperature Calibration (30 - 115 degrees F)

Temp (deg F)	TIP (mV)	FRIC (mV)	PIEZO (mV)	Deviation mV	Mpa	% Full Scale
30	1.578	0.973	-0.438	Tip	0.338	0.0169
50	1.652	0.939	-0.984	Friction	1.694	0.000847
75	1.681	0.981	-1.023	Piezo	5.714	0.014285
100	1.840	1.222	1.564			
115	1.877	2.011	3.210			

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICITION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/NCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer

Date: 12/16/2007

Checked By : Recep Yilmaz



Date: 12/16/2007

### HGL Instrument Verification

DATE: 12/16/2007 Instrument No.: ft Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer-TIP			mV	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	-1.8	1.8	-0.01
Model Number	F7.5CKE3SW2/B			35.300000	595.0	592.3	2.7	-0.01
Serial Number	1701-1498(Tip)			363.900000	6120.0	6121.9	1.9	0.01
HGL Instrument Number	ft			505.600000	8510.0	8506.4	3.6	-0.01
Excitation (V)				595.300000	10010.0	10015.9	5.9	0.02
Gain/Span Setting	NA			892.300000	15005.0	15013.8	8.8	0.03
Full Range Output (V)				1187.200000	19985.0	19976.4	8.6	-0.03
Full Range/Capacity (lb)	33716							
Date Verified	12/16/2007							
Date Due	12/15/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1			<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	Geotek							
Model Number	560K							
Serial Number	129739							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999999325							
Intercept (lb)	-1.775423408							
Slope (lb/mV)	16.82797742							
Verification (Calib.) Factor	16.82797742							
Verification Factor Units	lb/mV							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	1.145434402							
Coverage Factor	2							
Expanded Uncertainty (lb)	2.290868805							
Max. Abs. or FS Error (%)	0.03			<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			

MTS  Yes;  No

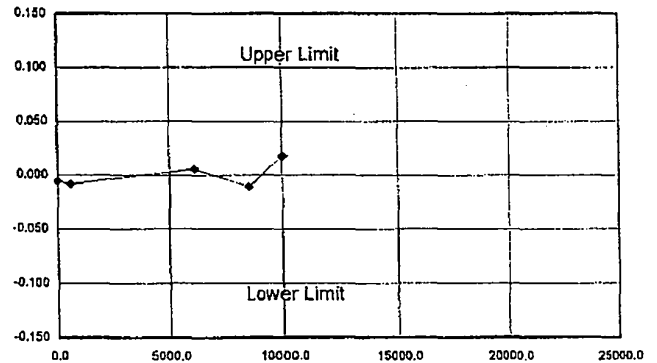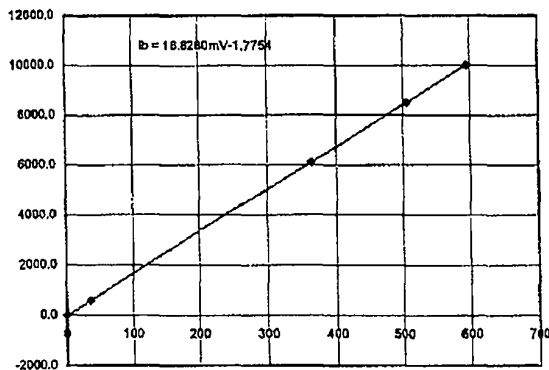

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	1.1454	N	1.0000	A	1.1454	1.3120	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	1.1454						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			Coverage Factor	2			for 95% confidence level.

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_





### HGL Instrument Verification

DATE: 12/16/2007 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard lb	Prediction lb	Abs. Error lb	Full Scale Error (%)
Type	Cone Penetrometer					
Manufacturer	Fugro	0.000000	0.0	-14.6	14.6	-0.09
Model Number	F7.5CKEV2/B	230.600000	520.0	512.9	7.1	-0.04
Serial Number	1701-1498 (Friction)	1101.300000	2490.0	2504.5	14.5	0.09
HGL Instrument Number	ft100	1548.200000	3510.0	3526.7	16.7	0.10
Excitation (V)		2191.600000	4890.0	4998.3	8.3	0.05
Gain/Span Setting	NA	3286.300000	7520.0	7502.3	17.7	-0.11
Full Range Output (V)						
Full Range/Capacity (lb)	16858					
Date Verified	12/16/2007					
Date Due	12/15/2008					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;				
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	INTERFACE					
Model Number	1211EX-10K-B					
Serial Number	113655					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999971576					
Intercept (lb)	-14.57516298					
Slope (lb/mv)	2.287323639					
Verification (Calib.) Factor	2.28732364					
Verification Factor Units	lb/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	1.796528357					
Coverage Factor	2					
Expanded Uncertainty (lb)	3.593056715					
Max. Abs. or FS Error (%)	-0.11	<input checked="" type="checkbox"/> FS;				

MTS  Yes;  No

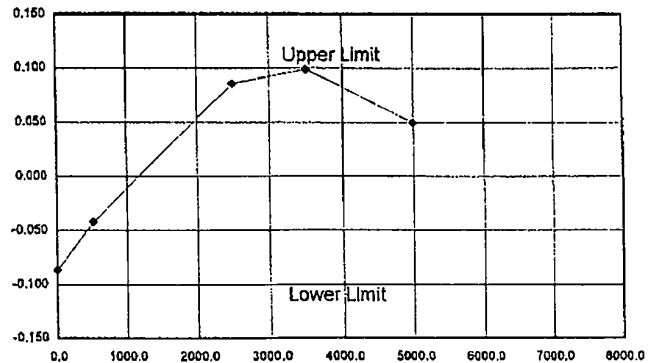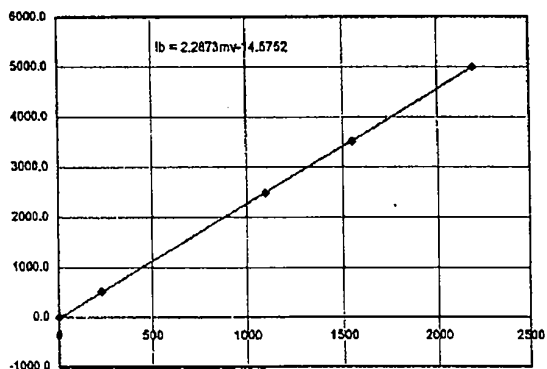

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	1.7965	N	1.0000	A	1.7965	3.2275	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	1.7965						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			3.593	lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.



Verified By: MS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 12/16/2007 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument mv	Standard psi	Prediction psi	Abs. Error psi	Full Scale Error (%)
Type	Cone Penetrometer							
Manufacturer	Fugro			0.000000	0.0	-0.2	0.2	-0.04
Model Number	F7.5CKEW2/B			207.800000	75.0	75.2	0.2	0.05
Serial Number	1701-1576-7056-1-133 (Piezo)			414.300000	150.0	150.0	0.0	0.01
HGL Instrument Number	pt			827.800000	300.0	299.9	0.1	-0.02
Excitation (V)								
Gain/Span Setting	NA							
Full Range Output (V)								
Full Range/Capacity (psi)	360							
Date Verified	12/16/2007							
Date Due	12/15/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	PT(ANSI/NCSL APPROVED)							
Manufacturer	Eaton							
Model Number	UPS3000CC							
Serial Number	A0813							
HGL Instrument Number								
Date Verified								
Temperature	°C =	°F						
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.99998775							
Intercept (psi)	-0.152094883							
Slope (psi/mv)	0.362513539							
Verification (Calib.) Factor	0.36251354							
Verification Factor Units	psi/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (psi)	0.03399576							
Coverage Factor	2							
Expanded Uncertainty (psi)	0.06799152							
Max. Abs. or FS Error (%)	0.05	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					

MTS  Yes;  No

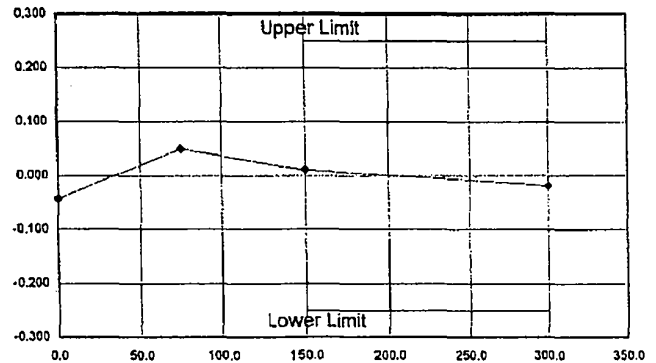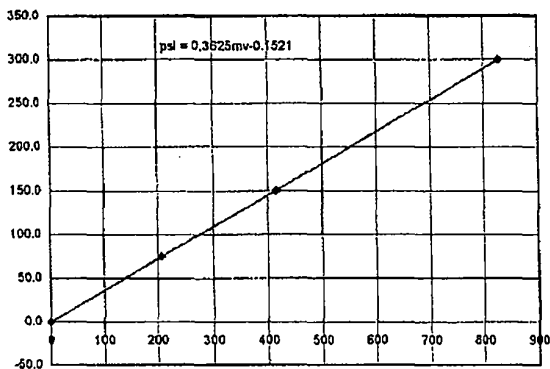

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.0340	N	1.0000	A	0.0340	0.0012	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.0340	Coverage Factor		2	for 95% confidence level.		
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	0.068			psi			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: RS

Input By: \_\_\_\_\_

Reviewed By: \_\_\_\_\_

Checked By: RS

File: \_\_\_\_\_

Remarks: \_\_\_\_\_

# CALIBRATION CERTIFICATE



**APPLICANT** FGI HOUSTON **Certificate number** FC070040 Page 1 of 1  
**SUBMITTED** **A Piezo Cone Penetrometer** **Manufacturer** Fugro Engineers B.V.  
**Device type** CONE, A15F2.5CKE3SW2/ B, 50 bar **Serial number** 1701-1788

The device contains an electronic data sheet which contains, amongst others, the characteristics of all the sensors inside the device. The data acquisition system calculates the measured value from these known characteristics. All calibration results are conform the values specified below.

### Force calibration

**Calibration reference** : 548 FRE.001  
**Procedure** : FEBV.CAL.PRO.003 KALIBRATIE KRACHT  
**Title of channel(s)** : Cone and Cone+Fric.  
**Max. load** 150 kN

Range	Calibration range		Sensitivity	Zero load
	From	to	Deviation	output
1	0	25 kN	< 0.5 %	< 0.75 kN
Calibration uncertainty			0.3 %	0.008 kN

### Pressure test :

Deviation from specified Alpha factor at 2.5 MPa	< 5 %
--	-------

### Cone quality control values :

Max. deviation from reference	< 1 %
Max. Tip to Sleeve friction Crosstalk	< 1 %

### Pressure calibration

**Calibration reference** : 3257-0001  
**Procedure** : FEBV.CAL.PRO.004 KALIBRATIE DRUK  
**Title of channel** : Pore 2  
**Max. load** 30 Mpa

Range	Calibration range		Sensitivity	Zero load
	From		Deviation	output
1	0	2.5 MPa	< 1.0 %	< 0.002 MPa
Calibration uncertainty			0.6 %	0.003 MPa
Pore 2 transducer : Kistler 4043A50				
SN : 1233109				

### Calibration of the slope sensor

**Calibration reference** :  
**Procedure**: FEBV.CAL.PRO.006 KALIBRATIE HELLING  
**Title of channel** : Slope x

Range	Calibration range		Sensitivity	Zero load
	From		Deviation	output
1	0	15 deg	< 10 %	< 1.5 deg
Calibration uncertainty			1 %	0.5 deg

### Typical values for this type of device

Cone diameter (mm)	43.7	Pore 2 position	2	Alpha factor	0.58
Cone area (square cm)	15	Sleeve length (mm)	144.7	Cone - Sleeve distance (mm)	14.4
Sleeve diameter (mm)	43.9	Sleeve area (square cm)	200	Cone - Pore 2 distance (mm)	6.0

**TRACEABILITY:** The measurements have been executed using standards for which the traceability to primary and/or (inter)national standards has been demonstrated .


**Calibrated by:** Hoogendoorn, Raymond

**Approved by:** Sinjorgo, Gerry

**Calibration date:** 16-1-2007

**Approval date:** 16-1-2007

**Calibrate before:** 16-1-2008



# Calibration Verification Certificate



Device Type: Piezo Cone Penetrometer


Device Number: F7.5CKESW2/V 1701-1788

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip readings in mV

Load	Load	load/area	Tip	Cal Factor
lb	Tons	tsf	mV	Mpa
0	0	0	0	0
540	0.27	16.77019	32.1	50.0287963
5110	2.555	158.6957	303.4	50.0883413
7580	3.79	235.4037	449.8	50.1165401
10020	5.01	311.1801	596.3	49.9728639
15020	7.51	466.4596	892.5	50.0487269
20005	10.0025	621.2733	1183.2	50.2819048

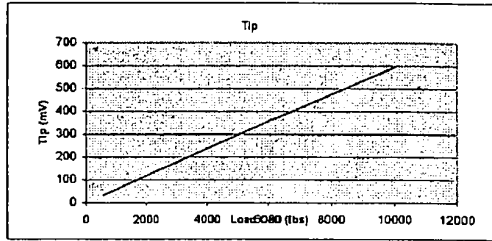


## FRICTION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>

Friction readings in mV

Load	Load	load/area	Friction	Cal Factor
lb	Tons	tsf	mV	Mpa
0	0	0	0	0
620	0.31	1.439851	279.8	0.49278463
1990	0.995	4.621458	884.6	0.50028711
3520	1.76	8.17464	1562.3	0.50106193
5010	2.505	11.63493	2212.2	0.5036473
7510	3.755	17.44078	3308.9	0.50474203

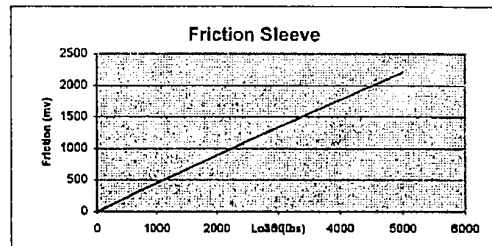


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial : 1233109

Pore Pressure readings in mV

Pressure	Pressure	Transducer	P.Pres.
psi	tsf	readings	Cal Factor
		mV	Mpa
0	0	0	0
75	5.4	206.7	2.50173026
150	10.8	413.6	2.50052053
300	21.6	824.2	2.50962215

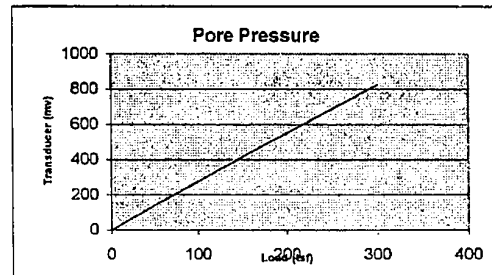

## Temperature Calibration (30 - 115 degrees F)

Temp (deg F)	TIP (mV)	FRIC (mV)	PIEZO (mV)	Deviation	mV	Mpa	% Full Scale
30	-0.017	-0.198	-0.109	Tip	0.274	0.0137	0.0274
50	-0.008	-0.336	-0.067	Friction	3.185	0.001593	0.3185
75	0.011	-0.456	-0.054	Piezo	2.593	0.006483	0.2593
100	0.132	2.307	-2.192				
115	0.257	2.987	-2.647				

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICTION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/INCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer *DS* Date: 11/5/2007



Checked By : Recep Yilmaz *RY* Date: 11/5/2007



### HGL Instrument Verification

DATE: 11/5/2007 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer			mv	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	-13.6	13.6	-0.08
Model Number	F7.5CKESW2/B1			279.800000	620.0	621.9	1.9	0.01
Serial Number	1701-1788 (Friction)			884.600000	1990.0	1995.4	5.4	0.03
HGL Instrument Number	ft100			1562.300000	3520.0	3534.5	14.5	0.09
Excitation (V)				2212.200000	5010.0	5010.5	0.5	0.00
Gain/Span Setting	NA			3308.900000	7510.0	7501.2	8.8	-0.05
Full Range Output (V)								
Full Range/Capacity (lb)	16858							
Date Verified	11/5/2007							
Date Due	11/4/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	INTERFACE							
Model Number	1211EX-10K-B							
Serial Number	113655							
HGL Instrument Number								
Date Verified								
Temperature	°C =	°F						
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999987431							
Intercept (lb)	-13.55356528							
Slope (lb/mv)	2.271068817							
Verification (Calib.) Factor	2.27106882							
Verification Factor Units	lb/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	2.398188297							
Coverage Factor	2							
Expanded Uncertainty (lb)	4.796376595							
Max. Abs. or FS Error (%)	0.09	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
				MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No		

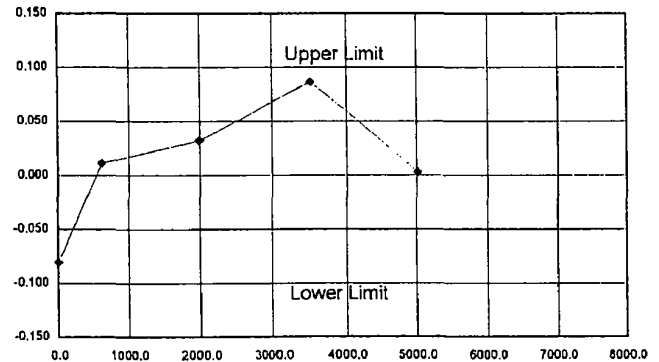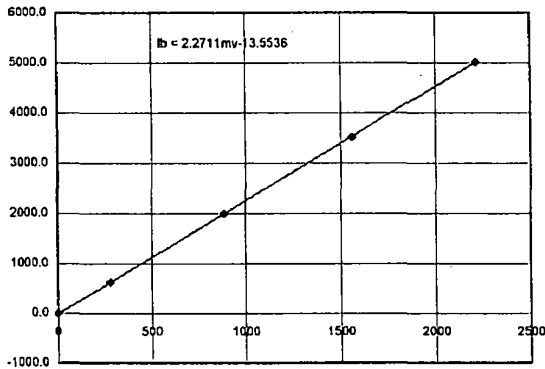

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	2.3982	N	1.0000	A	2.3982	5.7513	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	2.3982						
		Coverage Factor	2				for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>		4.796		lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.



(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: MS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Reg  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 11/5/2007 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer			mv	psi	psi	psi	Error (%)
Manufacturer	Fugro			0.000000	0.0	-0.2	0.2	-0.06
Model Number	F7.5CKESW2/B1			206.700000	75.0	75.0	0.0	0.01
Serial Number	1701-1788-1233109 (Piezo)			413.600000	150.0	150.4	0.4	0.10
HGL Instrument Number	pt			824.200000	300.0	299.8	0.2	-0.05
Excitation (V)								
Gain/Span Setting	NA							
Full Range Output (V)								
Full Range/Capacity (psi)	360							
Date Verified	11/5/2007							
Date Due	11/4/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	PT(ANSI/NCSL APPROVED)							
Manufacturer	Eaton							
Model Number	UPS3000CC							
Serial Number	A0813							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.99999592							
Intercept (psi)	-0.20331044							
Slope (psi/mv)	0.364010552							
Verification (Calib.) Factor	0.36401055							
Verification Factor Units	psi/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (psi)	0.064150208							
Coverage Factor	2							
Expanded Uncertainty (psi)	0.128300415							
Max. Abs. or FS Error (%)	0.10	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
				MTS <input type="checkbox"/> Yes; <input checked="" type="checkbox"/> No				

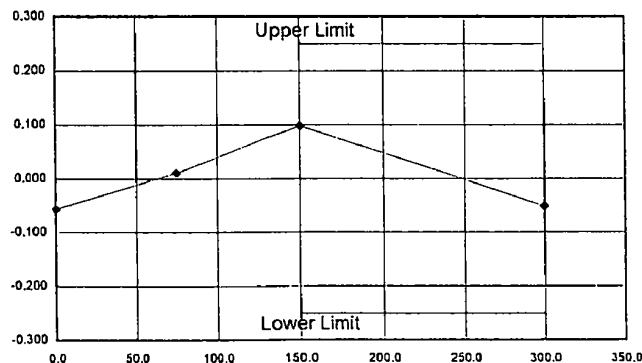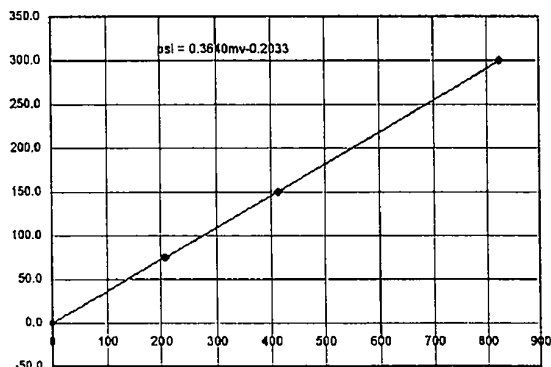

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.0642	N	1.0000	A	0.0642	0.0041	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.0642	Coverage Factor		2	for 95% confidence level.		
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	0.128			psi			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: LS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry

File: \_\_\_\_\_

Remarks: \_\_\_\_\_

# CALIBRATION CERTIFICATE



APPLICANT FGI HOUSTON Certificate number FC070494 Page 1 of 1  
 SUBMITTED A Piezo Cone Penetrometer Manufacturer Fugro Engineers B.V.  
 Device type CONE, A15F7.5CKEW2/B, 50 bar (2.5 ton) Serial number 1701-1831

The device contains an electronic data sheet which contains, amongst others, the characteristics of all the sensors inside the device. The data acquisition system calculates the measured value from these known characteristics. All calibration results are conform the values specified below.

### Force calibration

Calibration reference : 548 FRE.001  
 Procedure : FEBV.CAL.PRO.003 KALIBRATIE KRACHT  
 Title of channel(s) : Cone and Cone+Fric.  
 Max. load 150 kN

Range	Calibration range From to	Sensitivity Deviation	Zero load output
1	0 25 kN	< 0.5 %	< 0.75 kN
Calibration uncertainty		0.3 %	0.008 kN

### Pressure test :

Deviation from specified Alpha factor at 2.5 MPa	< 5 %
--	-------

### Cone quality control values :

Max. deviation from reference	< 1 %
Max. Tip to Sleeve friction Crosstalk	< 1 %

### Pressure calibration

Calibration reference : 3257-0001  
 Procedure : FEBV.CAL.PRO.004 KALIBRATIE DRUK  
 Title of channel : Pore 2  
 Max. load 12.5 Mpa

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 2.5 MPa	< 1.0 %	< 0.002 MPa
Calibration uncertainty		0.6 %	0.003 MPa
Pore 2 transducer : Kistler 4043A50 SN : 1233111			

### Calibration of the slope sensor

Calibration reference :  
 Procedure: FEBV.CAL.PRO.006 KALIBRATIE HELLING  
 Title of channel : Slope x

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 15 deg	< 10 %	< 1.5 deg
Calibration uncertainty		1 %	0.5 deg

### Typical values for this type of device

Cone diameter (mm)	43.7	Pore 2 position	2	Alpha factor	0.58
Cone area (square cm)	15	Sleeve length (mm)	144.7	Cone - Sleeve distance (mm)	14.4
Sleeve diameter (mm)	43.9	Sleeve area (square cm)	200	Cone - Pore 2 distance (mm)	6.0

TRACEABILITY The measurements have been executed using standards for which the traceability to primary and/or (inter)national standards has been demonstrated .


Calibrated by: Mouaouya, Mo

Calibration date: 15/05/2007

Calibrate before: 15/05/2008

Approved by : Sinigro, Gerry

Approval date: 15/05/2007





# Calibration Verification Certificate




Device Type: Piezo Cone Penetrometer

Device Number: F7.5CKEW2/B1 1701-1831

Tip = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip + Friction (cone readings in mV)


Load lbs	load tons	load tsf	Tip mV	Cal Factor
0	0		0	
600	0.3	18.63354	35.4	52.63712
5000	2.5	155.2795	296.2	52.42387
8750	4.35	270.1863	512.3	52.73987

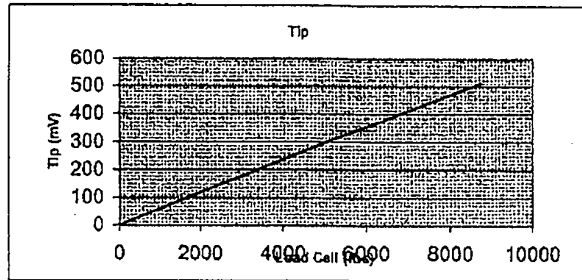

Sleeve = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>


Friction Only (cone readings in mV)

Load lbs	load tons	load tsf	Friction	Cal Factor
0	0	0	0.2	
600	0.3	1.393405	265.4	0.5250
2100	1.05	4.876916	934.3	0.5220
3200	1.6	7.431491	1405.3	0.5288

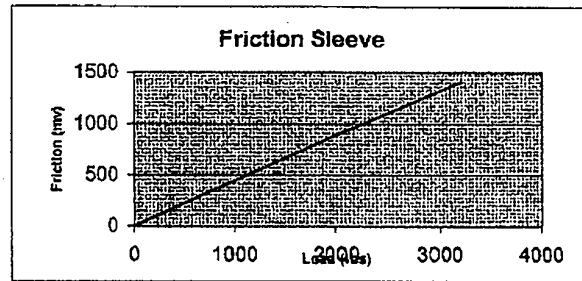

Pore Pressure Transducer

Pressure (tsf)	Transducer Output (mV)		
0	0	0	
5	5	200.5	2.4938
10	10	401.2	2.4925
20	20	801.6	2.4950

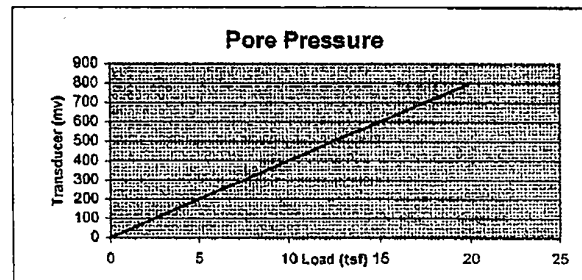

Calibration verified Interface 9820-000-1 Loadcell #113655 For Tip and Friction Calibration  
 Model #UPS3000CC SERIAL # A0813 for Pore pressure calibration  
 Loadcell used for calibration verification is traceable to primary standards at NIST and was calibrated by an A2LA accredited Laboratory.



Calibration verified by Dennis Stauffer  Date: 10/5/07

Checked by: Recep Yilmaz  Date: 10/5/07

### HGL Instrument Verification

DATE: \_\_\_\_\_ Instrument No.: ft \_\_\_\_\_ Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer_TIP			mV	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	2.9	2.9	0.02
Model Number	F7.5CKEW2/B1			35.400000	600.0	600.0	0.0	0.00
Serial Number	1701-1831			286.200000	5000.0	4999.8	0.4	0.00
HGL Instrument Number	ft			517.300000	8750.0	8729.4	20.6	-0.12
Excitation (V)				593.700000	10000.0	10018.2	18.2	0.11
Gain/Span Setting	NA							
Full Range Output (V)								
Full Range/Capacity (lb)	18858							
Date Verified								
Date Due								
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.							
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	Interface							
Model Number	1211EX-10K-B							
Serial Number	113655							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.998980823							
Intercept (lb)	2.851328541							
Slope (lb/mV)	16.8593632							
Verification (Calib.) Factor	16.85936320							
Verification Factor Units	lb/mV							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	4.525449005							
Coverage Factor	2							
Expanded Uncertainty (lb)	9.050898011							
Max. Abs. or FS Error (%)	-0.12 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.							
				MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No		

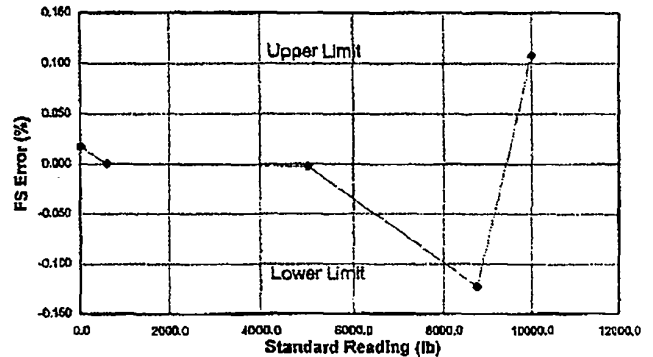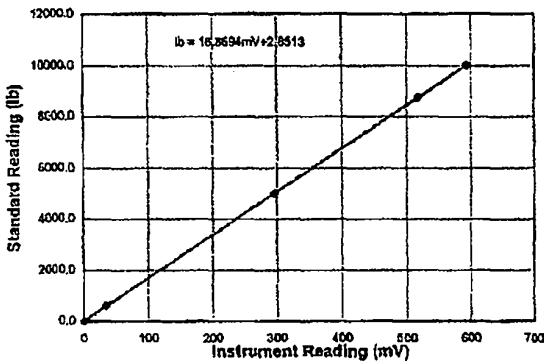

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	4.5254	N	1.0000	A	4.5254	20.4797	
Resolution of Instrument	0.0000	R	3.4841	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4841	B			
Combined Uncertainty	4.5254						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			9.051	lb			
					Coverage Factor	2	for 95% confidence level.

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., 8106V of the Mean.

(2) This value is unique for type (model) of equipment.



(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: \_\_\_\_\_ Instrument No.: ft \_\_\_\_\_ Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer	mv	lb	lb	lb	Error (%)
Manufacturer	Fugro	0.000000	0.0	2.7	2.7	0.02
Model Number	F7.5CKEW2/B1	255.400000	600.0	601.4	1.4	0.01
Serial Number	1701-1831	934.300000	2100.0	2110.4	10.4	0.06
HGL Instrument Number	ft	1405.300000	3200.0	3172.9	27.1	-0.16
Excitation (V)		2220.850000	6000.0	6012.6	12.6	0.07
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (lb)	18858					
Date Verified						
Date Due						
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	INTERFACE					
Model Number	1211EX-10K-B					
Serial Number	113655					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999937691					
Intercept (lb)	2.711953603					
Slope (lb/mv)	2.255859638					
Verification (Calib.) Factor	2.25585984					
Verification Factor Units	lb/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	4.602345851					
Coverage Factor	2					
Expanded Uncertainty (lb)	9.204691303					
Max. Abs. or FS Error (%)	-0.16	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.	MTS: <input type="checkbox"/> Yes; <input checked="" type="checkbox"/> No		

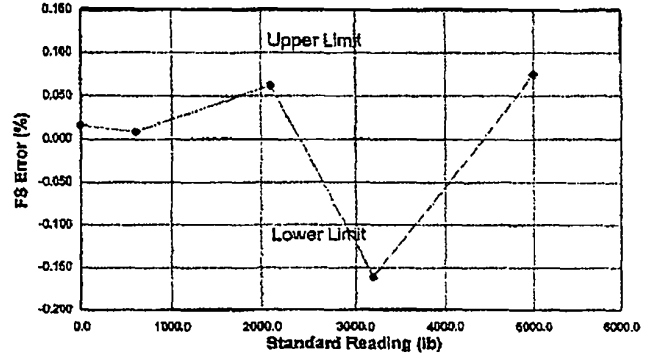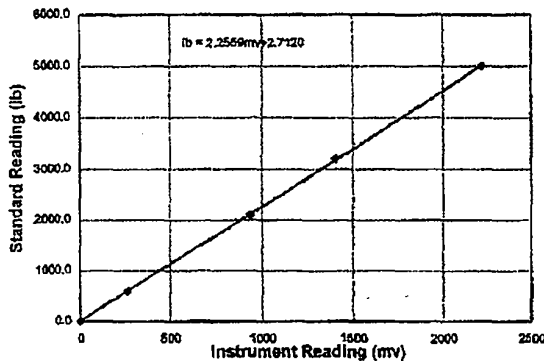

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	4.6023	N	1.0000	A	4.6023	21.1816	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	4.6023						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			9.205	lb			
			Coverage Factor		2		for 95% confidence level.



(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.  
 (3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: \_\_\_\_\_ Instrument No.: pt \_\_\_\_\_ Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard psi	Prediction psi	Abs. Error psi	Full Scale Error (%)
Type	Cone Penetrometer					
Manufacturer	Fugro	0.000000	0.0	0.0	0.0	-0.01
Model Number	F7.5CKEW2/B1	206.800000	75.0	75.0	0.0	-0.01
Serial Number	1701-1831-1233111	413.900000	150.0	150.1	0.1	0.03
HGL Instrument Number	pt	827.000000	300.0	300.0	0.0	-0.01
Excitation (V)						
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (psi)	360					
Date Verified						
Date Due						
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
Verification/Standard Equipment						
Type	PT(ANSI/NCSL APPROVED)					
Manufacturer	Eaton					
Model Number	UPS3000CC					
Serial Number	A0813					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.99999702					
Intercept (psi)	-0.036235332					
Slope (psi/mv)	0.362744313					
Verification (Calib.) Factor	0.36274431					
Verification Factor Units	psi/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (psi)	0.018078098					
Coverage Factor	2					
Expanded Uncertainty (psi)	0.036156196					
Max. Abs. or FS Error (%)	0.03	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.	MTS: <input type="checkbox"/> Yes; <input checked="" type="checkbox"/> No		

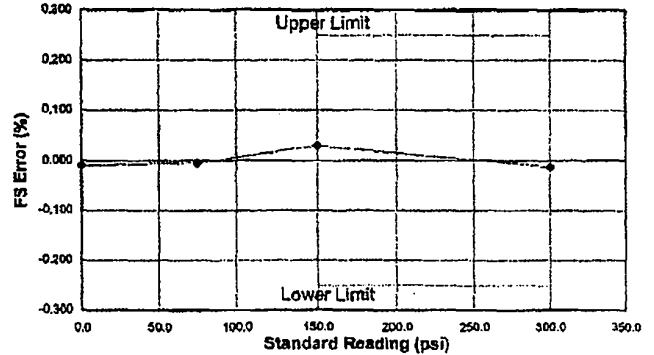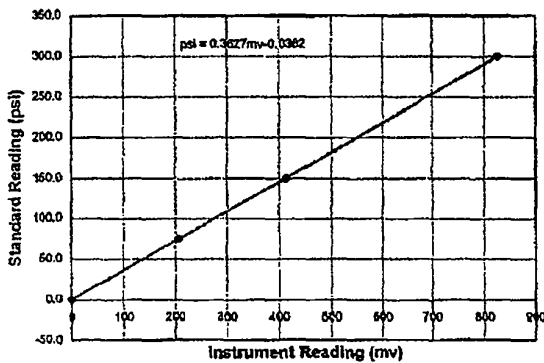

Uncertainty Budget Analysis For pt						
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>
Standard's Uncertainty		N	2.0000	B		
Abs. Error-STDEV <sup>1</sup>	0.0181	N	1.0000	A	0.0181	0.0003
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000
Repeatability <sup>2</sup>		N	1.0000	A		
Resolution of Standard	#N/A	R	3.4641	B		
Combined Uncertainty	0.0181					
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	0.036			psi		
					Coverage Factor	2
					for 95% confidence level.	

(1) This equation follows the approach presented by ASLA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

# CALIBRATION CERTIFICATE



APPLICANT: FGI HOUSTON  
 SUBMITTED: **A Piezo Cone Penetrometer**  
 Device type: CONE, A15F7.5CKEW2/B, 50 bar (2.5 ton)

Certificate number: FC070496  
 Manufacturer: Fugro Engineers B.V.  
 Serial number: 1701-1832

The device contains an electronic data sheet which contains, amongst others, the characteristics of all the sensors inside the device. The data acquisition system calculates the measured value from these known characteristics. All calibration results are conform the values specified below.

### Force calibration

Calibration reference : 548 FRE.001  
 Procedure : FEBV.CAL.PRO.003 KALIBRATIE KRACHT  
 Title of channel(s) : Cone and Cone+Fric.

Max. load 150 kN

Range	Calibration range From to	Sensitivity Deviation	Zero load output
1	0 25 kN	< 0.5 %	< 0.75 kN
Calibration uncertainty		0.3 %	0.008 kN

### Pressure test :

Deviation from specified Alpha factor at 2.5 MPa	< 5 %
--	-------

### Cone quality control values :

Max. deviation from reference	< 1 %
Max. Tip to Sleeve friction Crosstalk	< 1 %

### Pressure calibration

Calibration reference : 3257-0001  
 Procedure : FEBV.CAL.PRO.004 KALIBRATIE DRUK  
 Title of channel : Pore 2

Max. load 12.5 Mpa

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 2.5 MPa	< 1.0 %	< 0.002 MPa
Calibration uncertainty		0.6 %	0.003 MPa
Pore 2 transducer : Kistler 4043A50 SN : 1233112			

### Calibration of the slope sensor

Calibration reference :  
 Procedure: FEBV.CAL.PRO.006 KALIBRATIE HELLING  
 Title of channel : Slope x

Range	Calibration range From	Sensitivity Deviation	Zero load output
1	0 15 deg	< 10 %	< 1.5 deg
Calibration uncertainty		1 %	0.5 deg

### Typical values for this type of device

Cone diameter (mm)	43.7	Pore 2 position	2	Alpha factor	0.58
Cone area (square cm)	15	Sleeve length (mm)	144.7	Cone - Sleeve distance (mm)	14.4
Sleeve diameter (mm)	43.9	Sleeve area (square cm)	200	Cone - Pore 2 distance (mm)	6.0

TRACEABILITY The measurements have been executed using standards for which the traceability to primary and/or (inter)national standards has been demonstrated .


Calibrated by: Mouaouya, Mo

Calibration date: 15/05/2007

Calibrate before: 15/05/2008

Approved by : Sinjorgo, Gerry

Approval date: 15/05/2007



# Calibration Verification Certificate



Device Type: Piezo Cone Penetrometer


Device Number: F7.5CKEW2/V 1701-1832

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip readings in mV

Load lb	Load Tons	load/area tsf	Tip mV	Cal Factor Mpa
0	0	0	0	0
610	0.305	18.9441	36.3	49.9751995
5130	2.565	159.3168	304.1	50.1686335
8550	4.275	265.528	506.9	50.1620354
10030	5.015	311.4907	596.4	50.0143495
15040	7.52	467.0807	892.2	50.1322208
20010	10.005	621.4286	1184.4	50.2435152

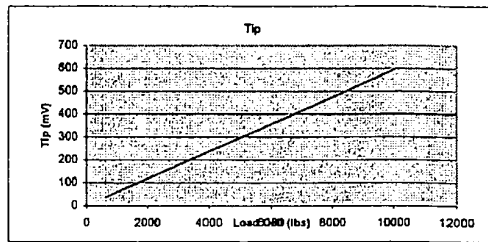


## FRICTION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>

Friction readings in mV

Load lb	Load Tons	load/area tsf	Friction mV	Cal Factor Mpa
0	0	0	0	0
630	0.315	1.463075	279.8	0.50073277
1995	0.9975	4.63307	887.6	0.49984894
3350	1.675	7.779842	1488.4	0.50053946
4980	2.49	11.56526	2210	0.50112981
7520	3.76	17.464	3307.8	0.50558219

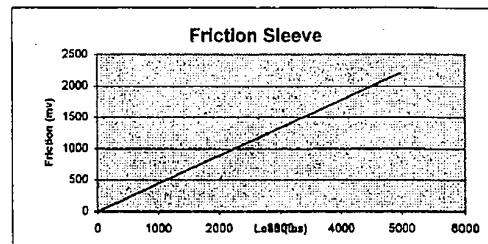


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial : 123312

Pore Pressure readings in mV

Pressure Pressure Transducer readings

psi	tsf	mV	P.Pres. Cal Factor Mpa
0	0	0	0
75	5.4	209.1	2.473016
150	10.8	413.8	2.49931196
300	21.6	833.8	2.48072749

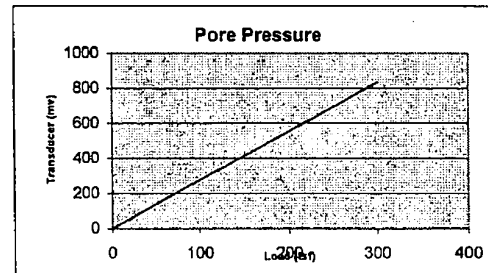

## Temperature Calibration (30 - 115 degrees F)

Temp (deg F)	TIP (mV)	FRIC (mV)	PIEZO (mV)	Deviation	mV	Mpa	% Full Scale
30	-0.007	0.189	-0.047	Tip	0.242	0.0121	0.0242
50	-0.035	0.203	0.126	Friction	3.174	0.001587	0.31738
75	-0.049	0.291	0.140	Piezo	3.058	0.007645	0.3058
100	-0.129	2.804	-2.391				
115	-0.249	3.363	-2.932				

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICTION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/NCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer

Date: 11/5/2007



Checked By : Recep Yilmaz

Date: 11/5/2007

### HGL Instrument Verification

DATE: 11/5/2007 Instrument No.: ft Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument mV	Standard lb	Prediction lb	Abs. Error lb	Full Scale Error (%)
Type	Cone Penetrometer_TIP							
Manufacturer	Fugro			0.000000	0.0	-8.5	8.5	-0.03
Model Number	F7.5CKEV2/B1			36.300000	610.0	604.3	5.7	-0.02
Serial Number	1701-1832 (Tip)			304.100000	5130.0	5125.3	4.7	-0.01
HGL Instrument Number	ft			506.900000	8550.0	8549.0	1.0	0.00
Excitation (V)				596.400000	10030.0	10059.9	29.9	0.09
Gain/Span Setting	NA			892.200000	15040.0	15053.6	13.6	0.04
Full Range Output (V)				1184.400000	20010.0	19986.5	23.5	-0.07
Full Range/Capacity (lb)	33716							
Date Verified	11/5/2007							
Date Due	11/4/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	Geotac							
Model Number	560K							
Serial Number	129739							
HGL Instrument Number								
Date Verified								
Temperature	°C =	°F						
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999994562							
Intercept (lb)	-8.544049781							
Slope (lb/mV)	16.88202947							
Verification (Calib.) Factor	16.88202947							
Verification Factor Units	lb/mV							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	4.016393928							
Coverage Factor	2							
Expanded Uncertainty (lb)	8.032787857							
Max. Abs. or FS Error (%)	0.09	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
				MTS <input type="checkbox"/> Yes; <input checked="" type="checkbox"/> No				

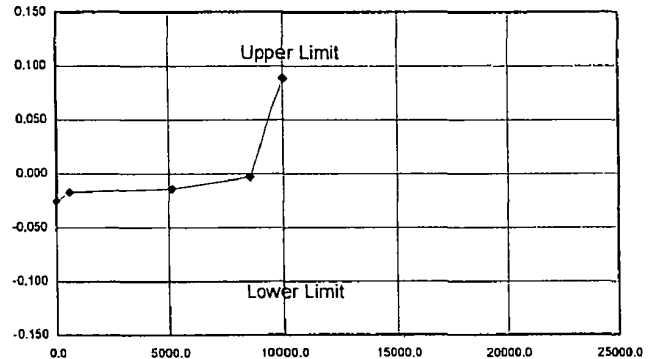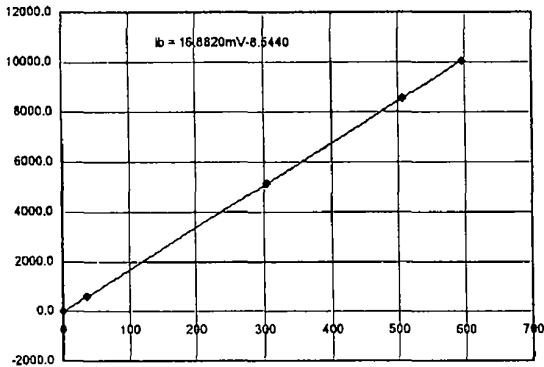

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	4.0164	N	1.0000	A	4.0164	16.1314	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	4.0164		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			8.033	lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: *[Signature]*

Input By: \_\_\_\_\_

Reviewed By: \_\_\_\_\_

Checked By: *[Signature]*



File: \_\_\_\_\_

Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 11/5/2007 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer	mv	lb	lb	lb	Error (%)
Manufacturer	Fugro	0.000000	0.0	-213.5	213.5	-1.27
Model Number	F7.5CKEW2/B1	279.800000	630.0	435.4	194.6	-1.15
Serial Number	1701-1832 (Friction)	887.600000	1195.0	1845.0	650.0	3.86
HGL Instrument Number	ft100	1488.400000	3350.0	3238.4	111.6	-0.66
Excitation (V)		2210.000000	4980.0	4911.8	68.2	-0.40
Gain/Span Setting	NA	3307.800000	7520.0	7457.8	62.2	-0.37
Full Range Output (V)						
Full Range/Capacity (lb)	16858					
Date Verified	11/5/2007					
Date Due	11/4/2008					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	INTERFACE					
Model Number	1211EX-10K-B					
Serial Number	113655					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.98755242					
Intercept (lb)	-213.4594712					
Slope (lb/mv)	2.319144175					
Verification (Calib.) Factor	2.31914417					
Verification Factor Units	lb/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	90.41311646					
Coverage Factor	2					
Expanded Uncertainty (lb)	180.8262329					
Max. Abs. or FS Error (%)	3.86	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
		MTS		<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No	

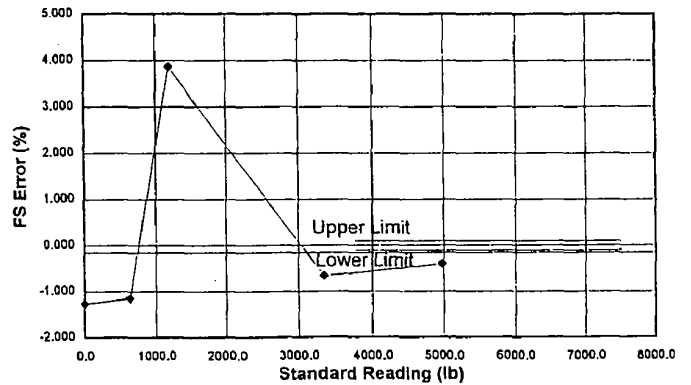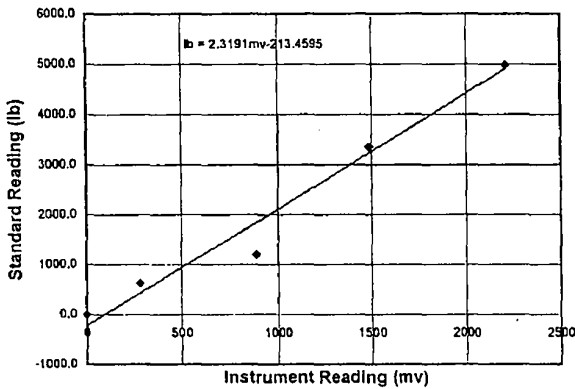

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	90.4131	N	1.0000	A	90.4131	8,174.5316	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	90.4131		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	180.826			lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.  
 Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_





### HGL Instrument Verification

DATE: 11/5/2007 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer			mv	psi	psi	psi	Error (%)
Manufacturer	Fugro			0.000000	0.0	0.1	0.1	0.04
Model Number	F7.5CKEW2/B1			209.100000	75.0	75.4	0.4	0.12
Serial Number	1701-1832-123312 (Piezo)			413.800000	150.0	149.1	0.9	-0.25
HGL Instrument Number	pt			833.800000	300.0	300.3	0.3	0.09
Excitation (V)								
Gain/Span Setting	NA							
Full Range Output (V)								
Full Range/Capacity (psi)	360							
Date Verified	11/5/2007							
Date Due	11/4/2008							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	PT(ANSI/NCSL APPROVED)							
Manufacturer	Eaton							
Model Number	UPS3000CC							
Serial Number	A0813							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999978009							
Intercept (psi)	0.132500696							
Slope (psi/mv)	0.360039814							
Verification (Calib.) Factor	0.36003981							
Verification Factor Units	psi/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (psi)	0.158811828							
Coverage Factor	2							
Expanded Uncertainty (psi)	0.317623656							
Max. Abs. or FS Error (%)	-0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					

MTS  Yes;  No

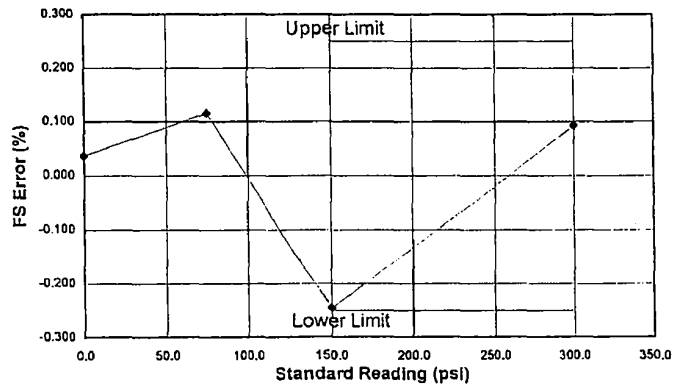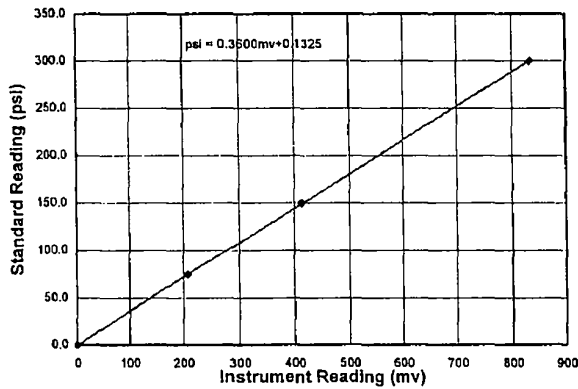

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.1588	N	1.0000	A	0.1588	0.0252	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.1588		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>		0.318		psi			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: RS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

# Calibration Verification Certificate



Device Type: Seismograph


Device Manufacturer Geometrics, Inc.

Model Number: ES-3000

Serial Number: 5138

## Frequency (Hz)

Input	Seismograph
10.059	10.0
20.042	19.8
30.061	29.5
40.042	40.1
50.056	50.3
60.050	60.3
70.050	70.2
80.002	80.0
90.080	90.0
100.002	99.7

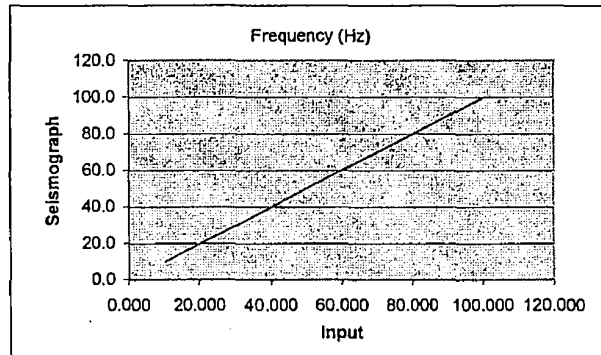

FREQUENCY CALIBRATED BY INSTEK GOOD WILL INSTRUMENTS (A2LA APPROVED) FREQUENCY COUNTER :

Model: GFC-80101H, Serial No. CF871549

FREQUENCY GENERATED BY EZ DIGITAL, INC (A2LA APPROVED) OSCILLISCOPE WITH BUILT IN FUNCTION GENERATOR


Model: OS-5020G, Serial No.: 3080209


Calibration Verified by: Dennis Stauffer *DS*


Date: 10/5/2007


Checked By : Recep Yilmaz *RY*


Date: 10/5/2007

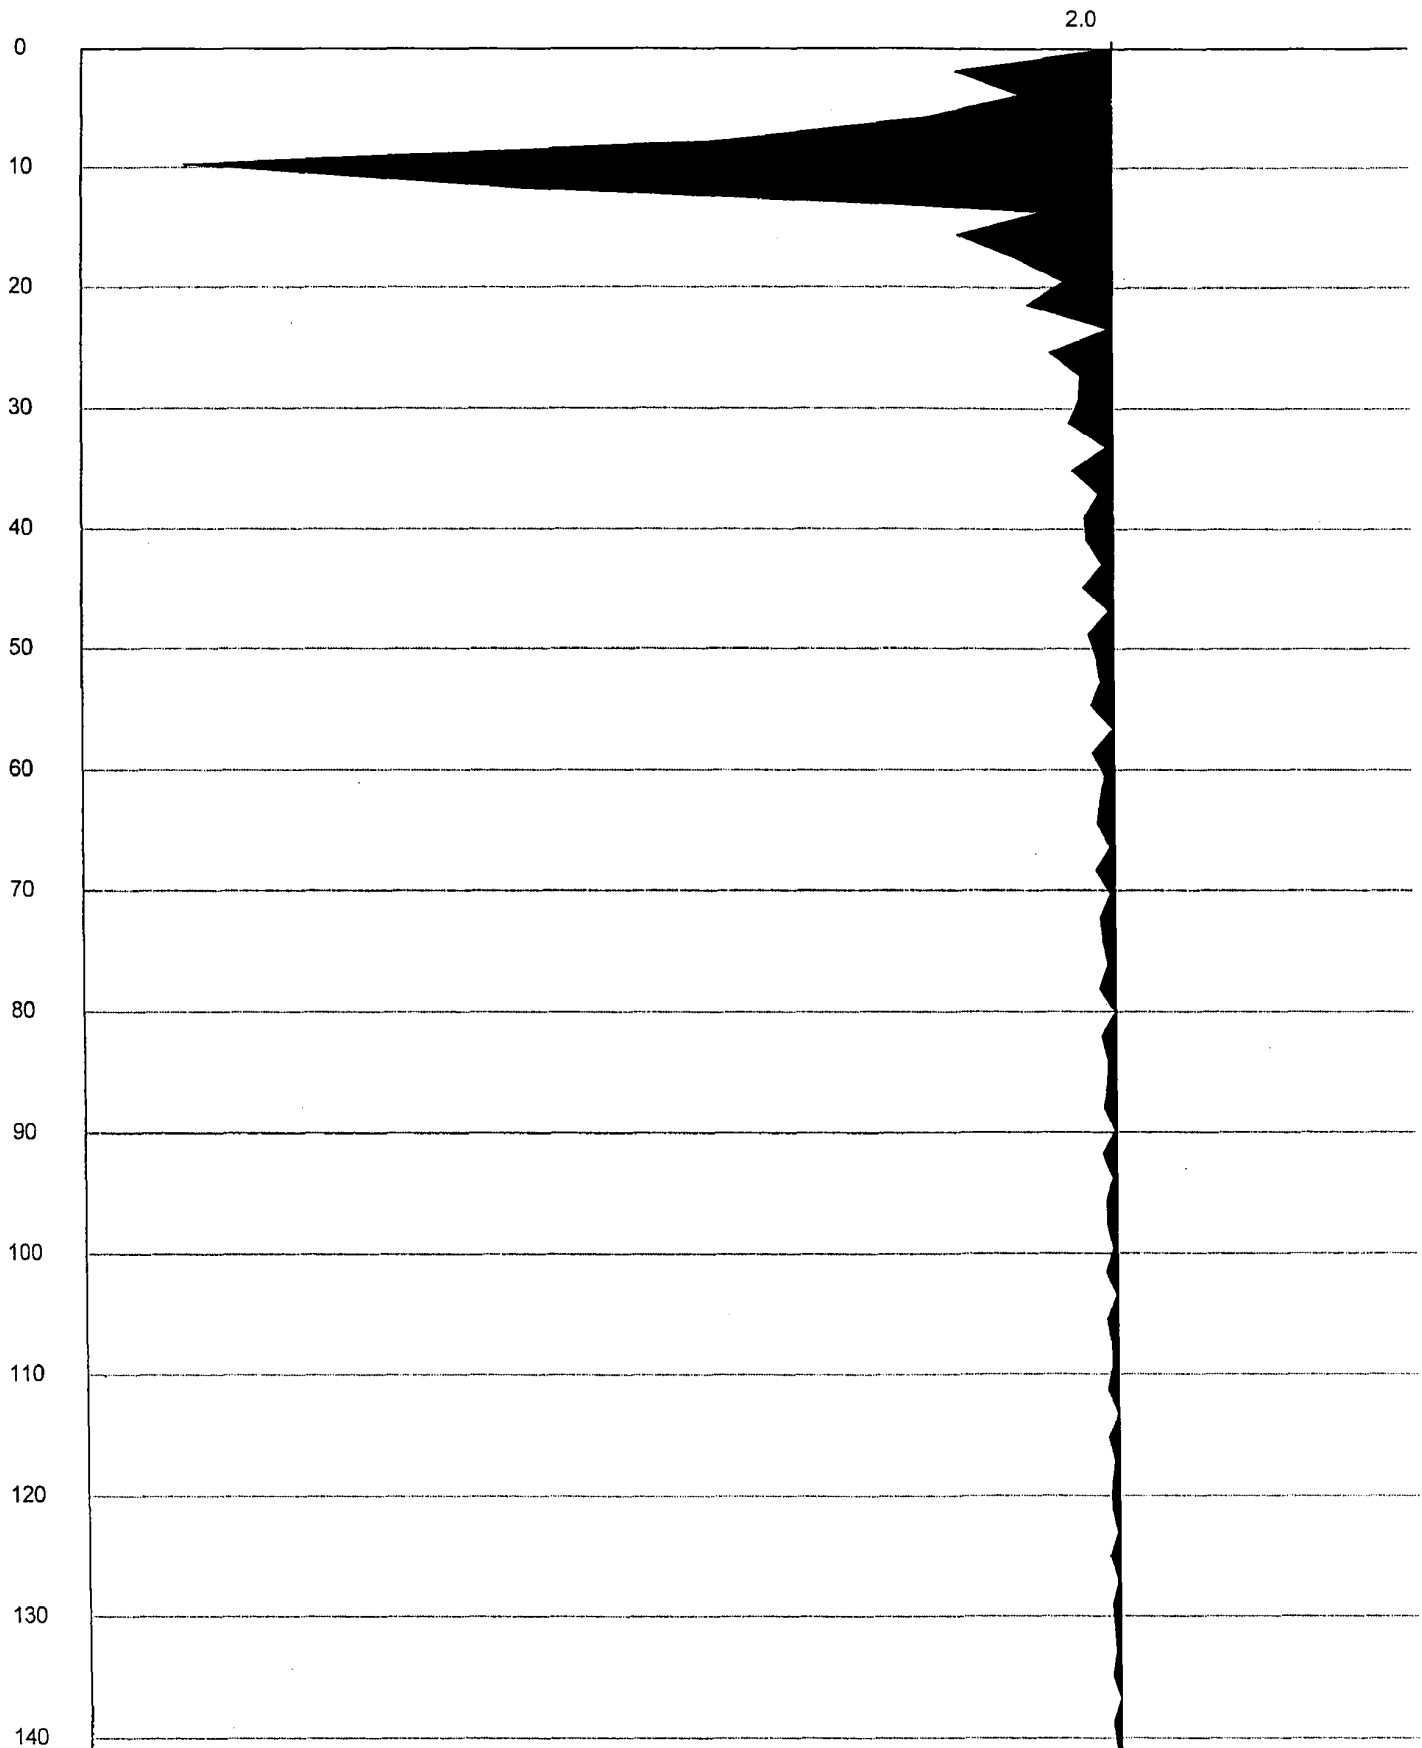


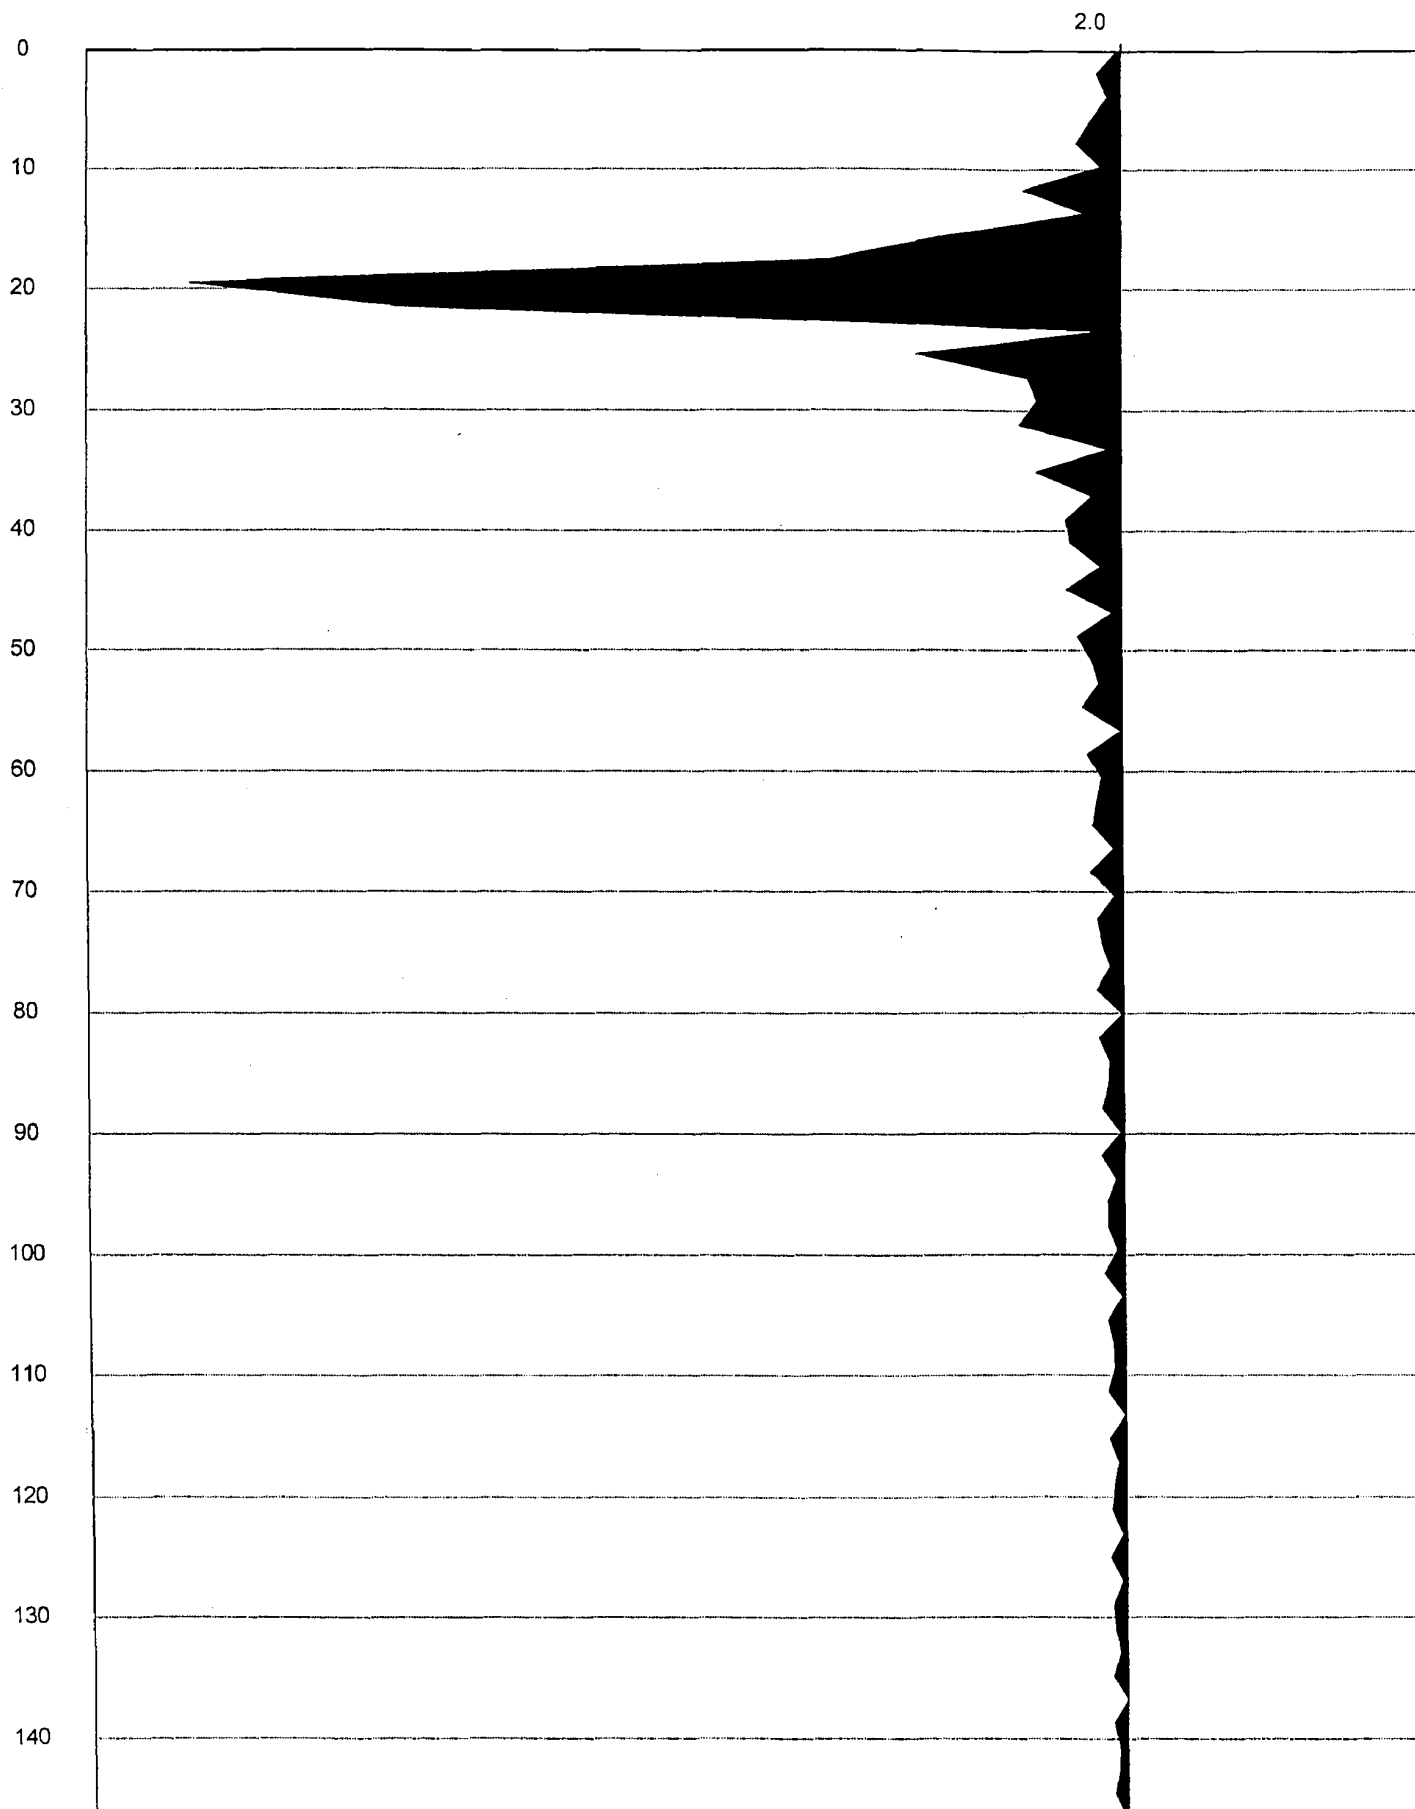

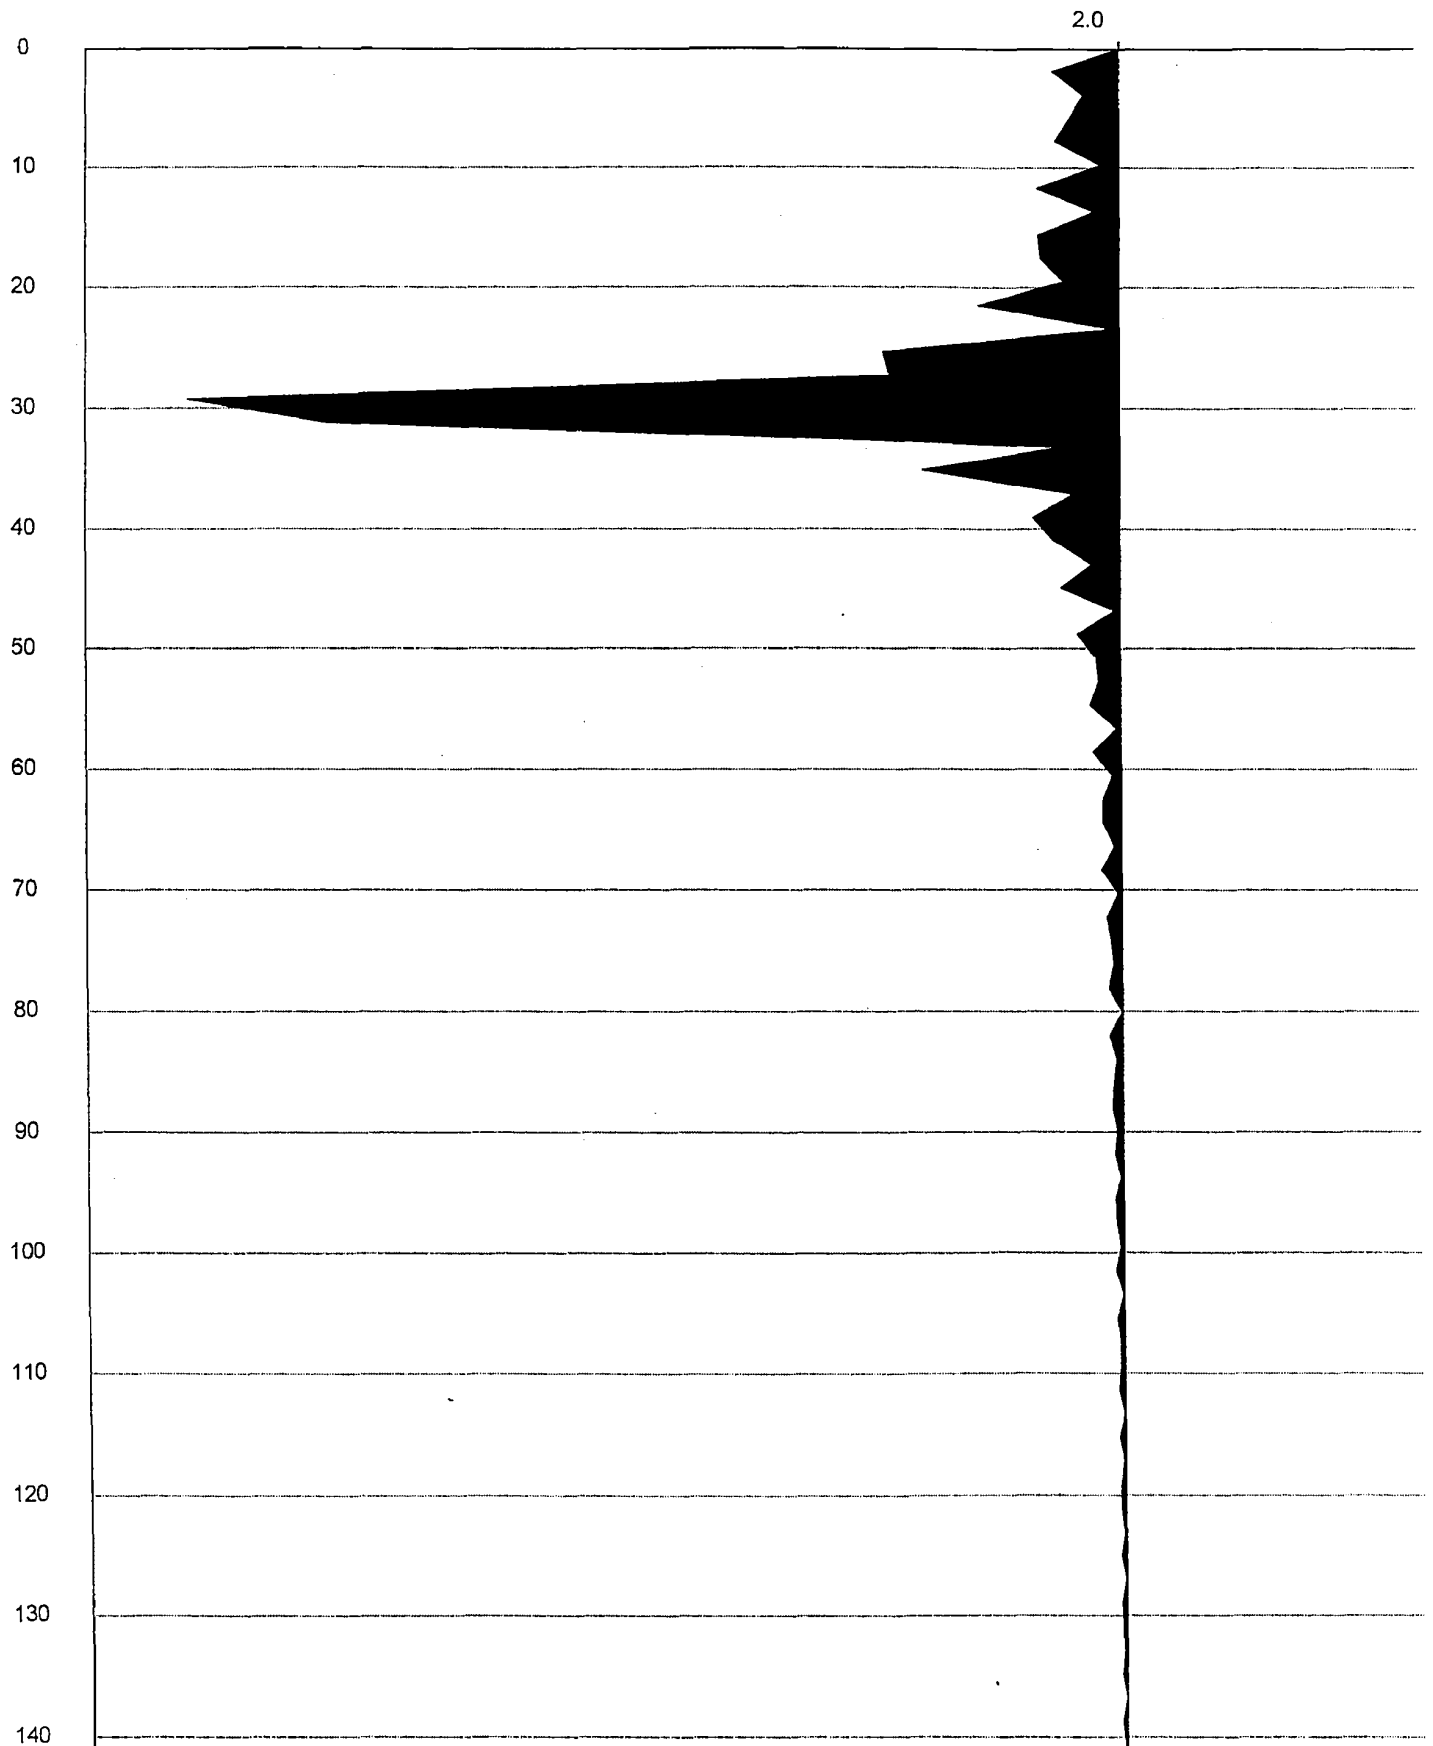


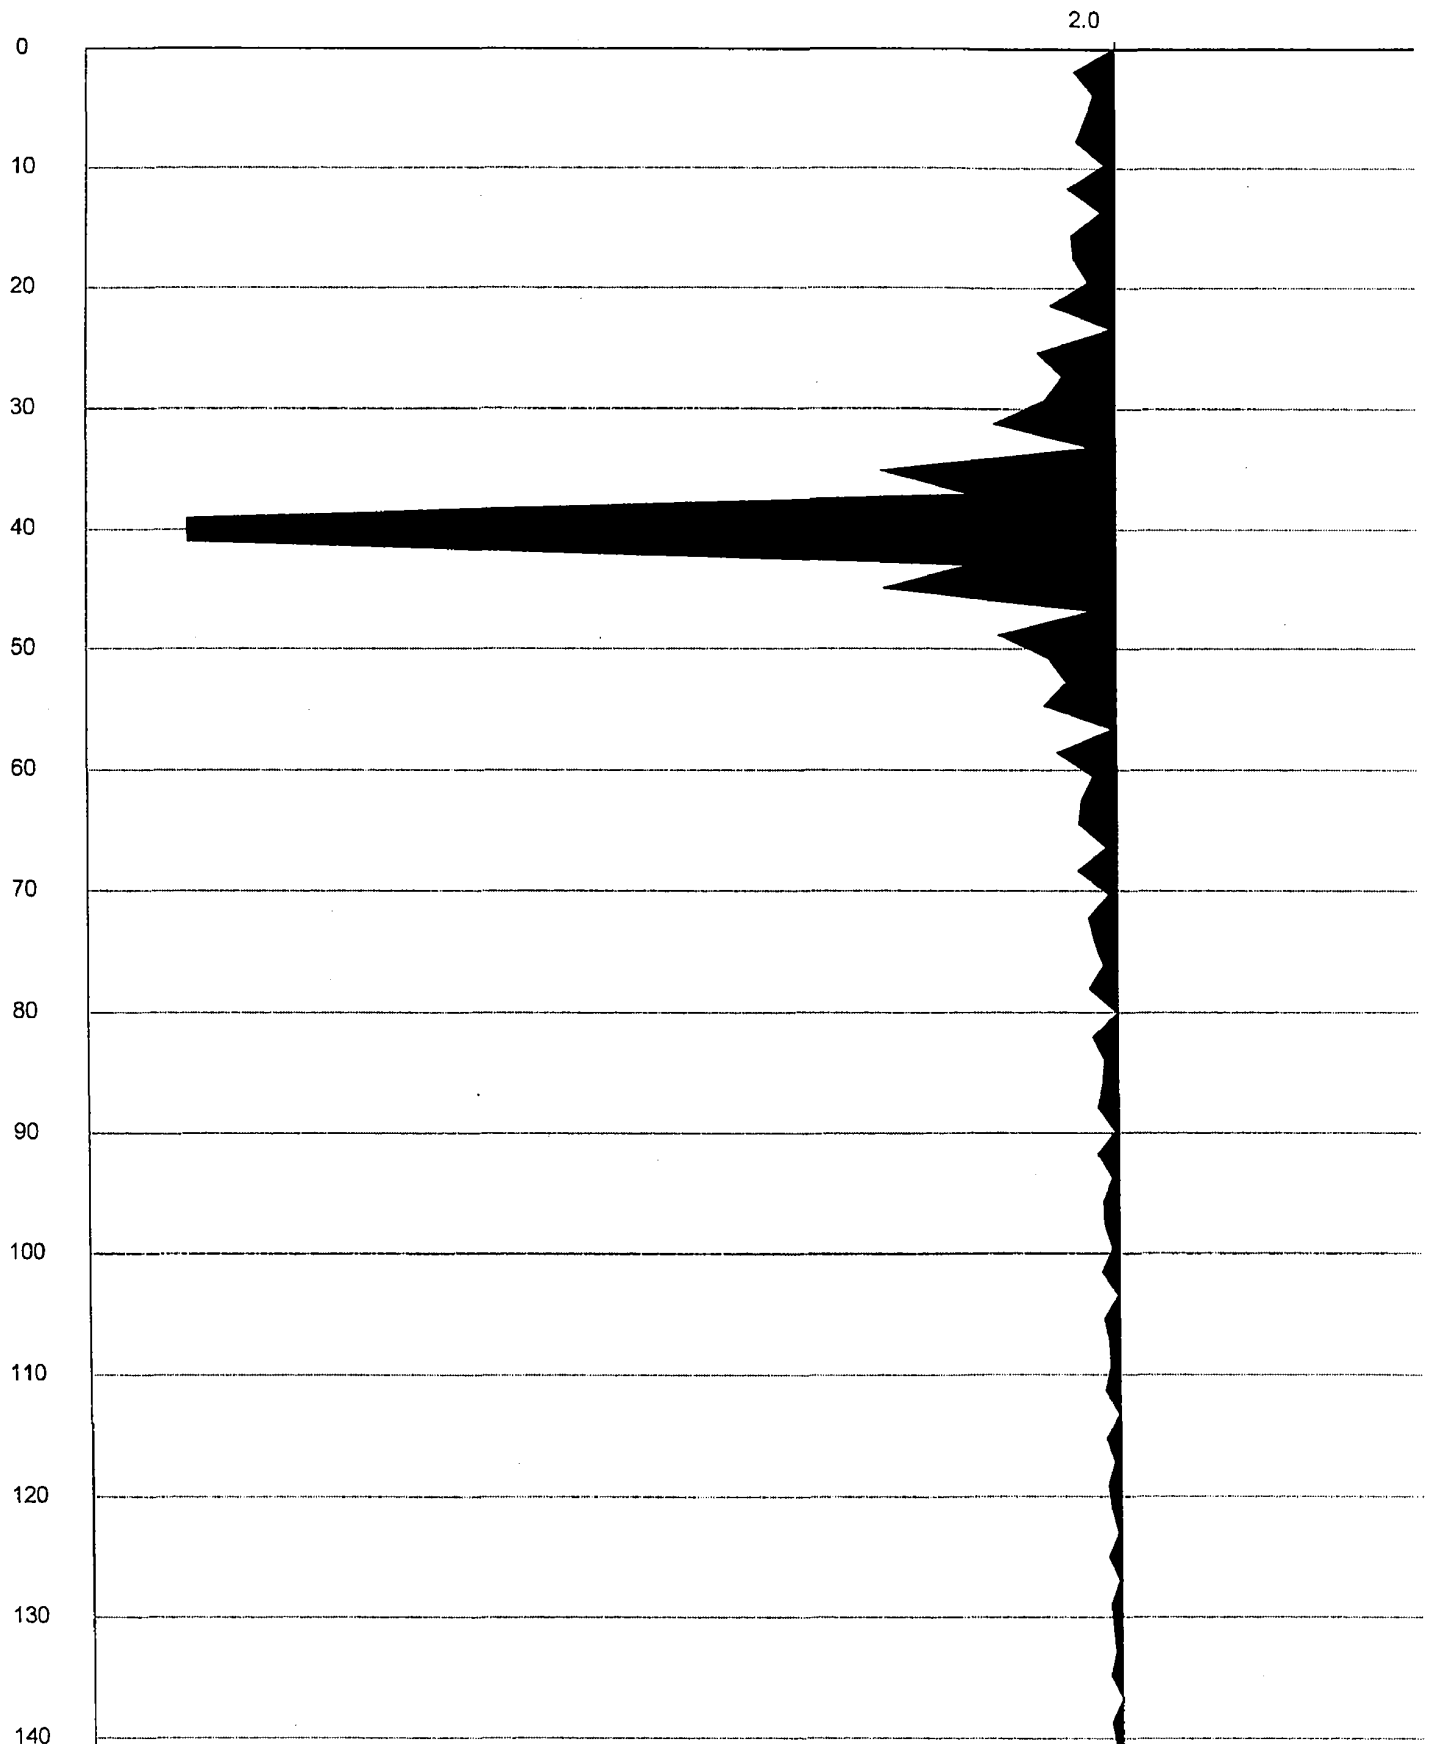


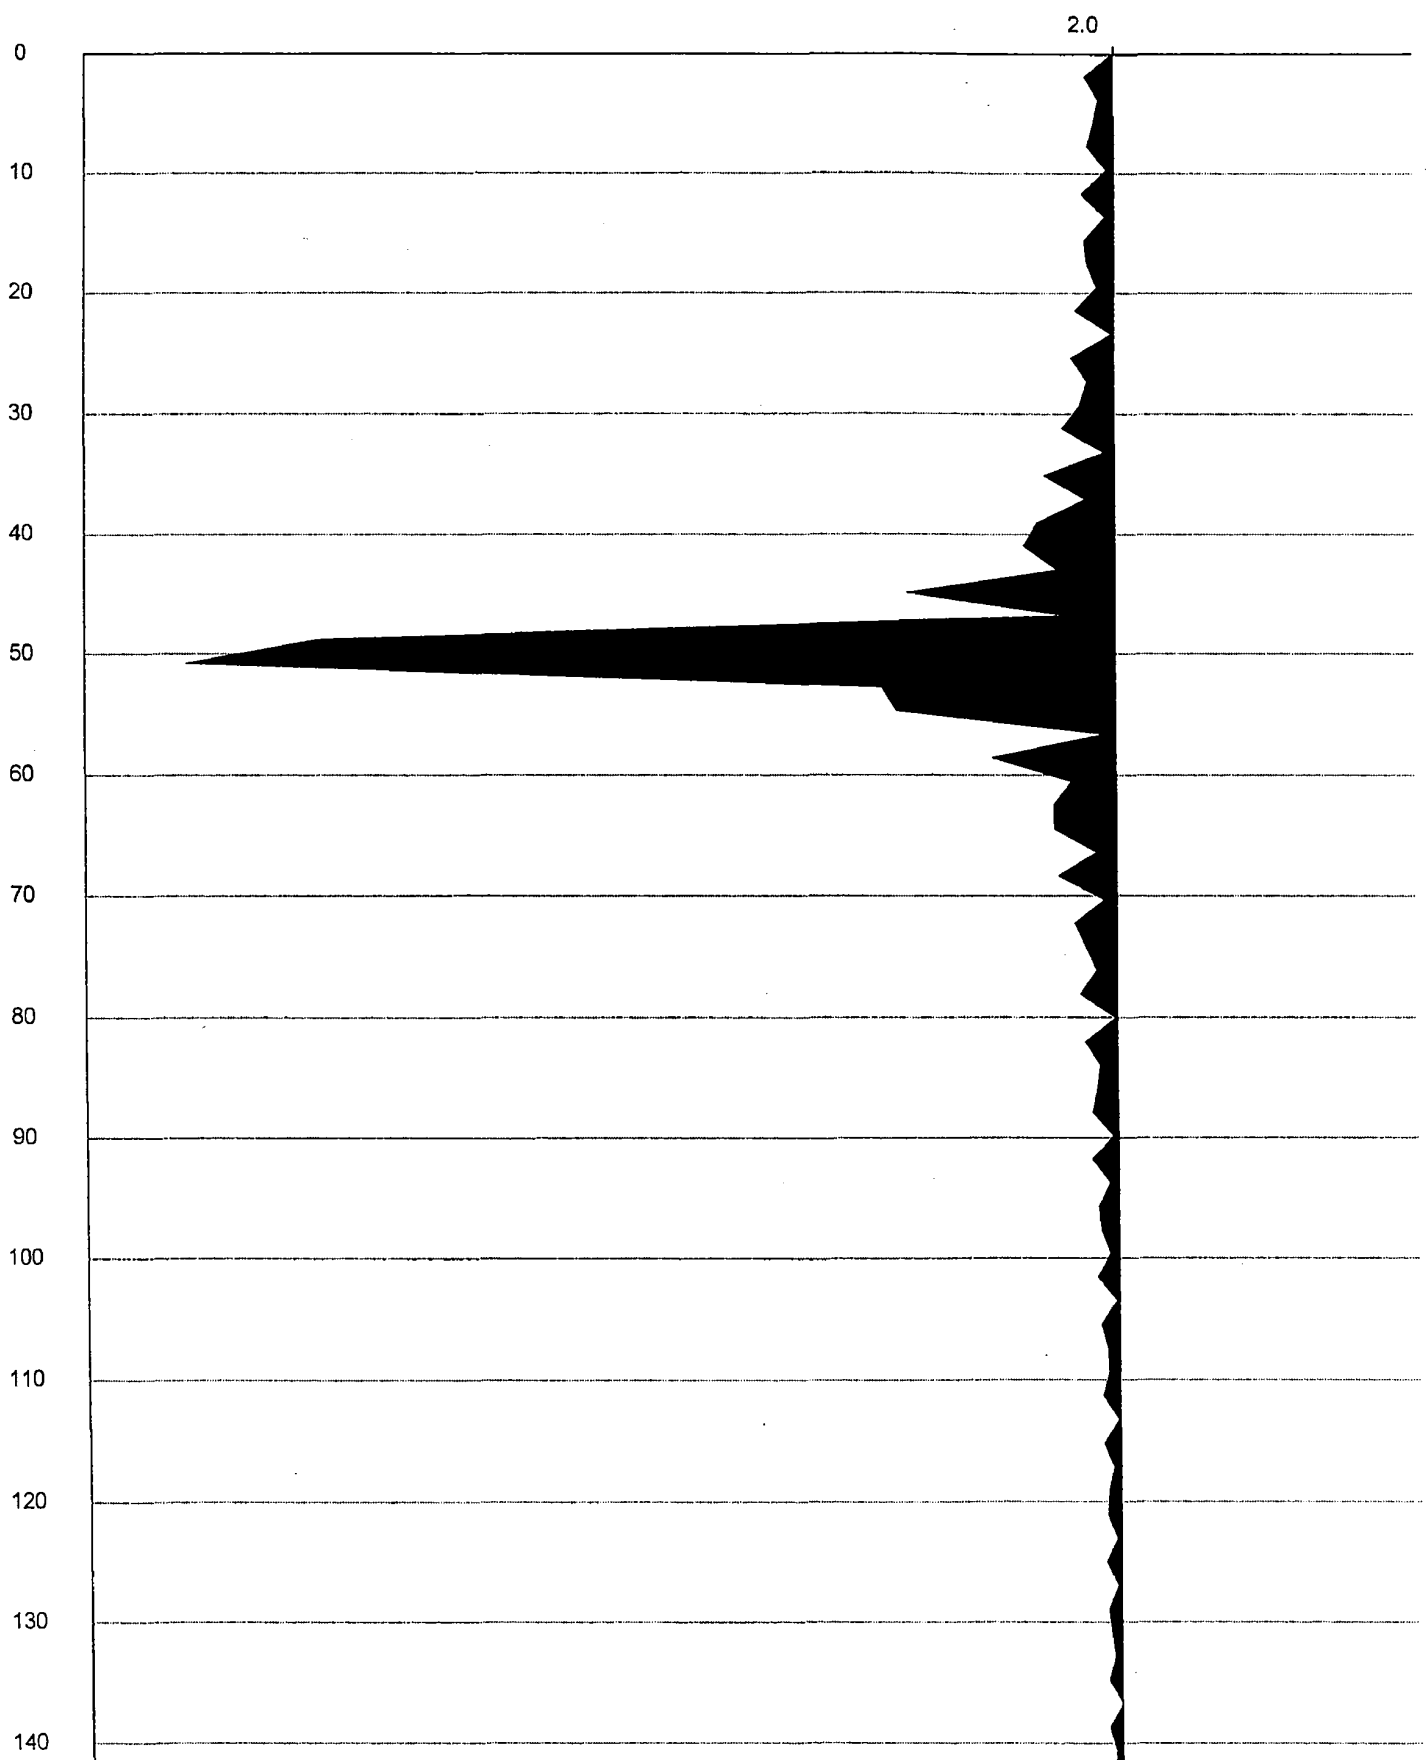


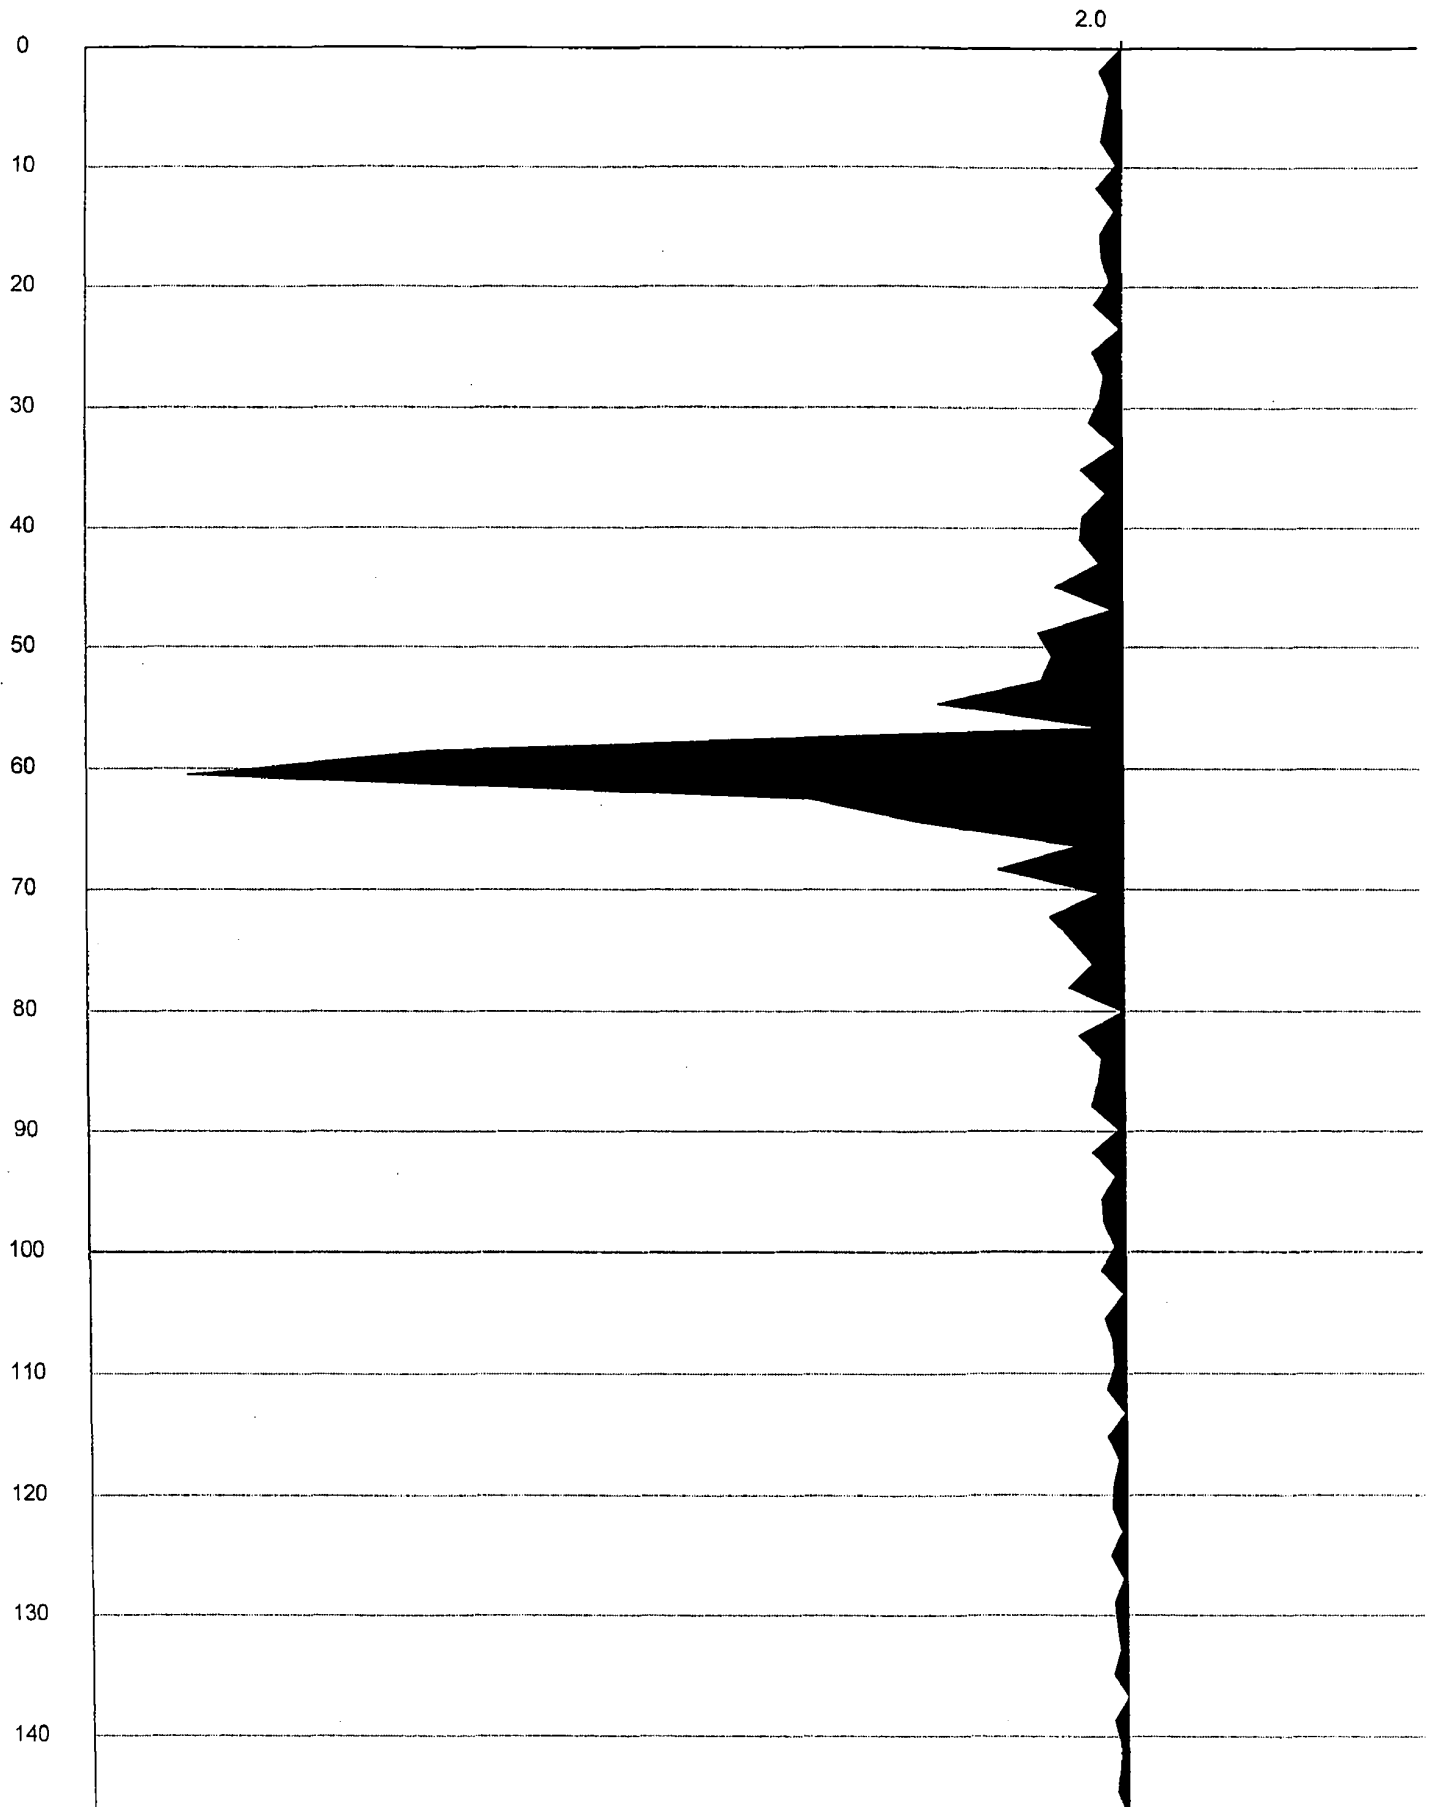




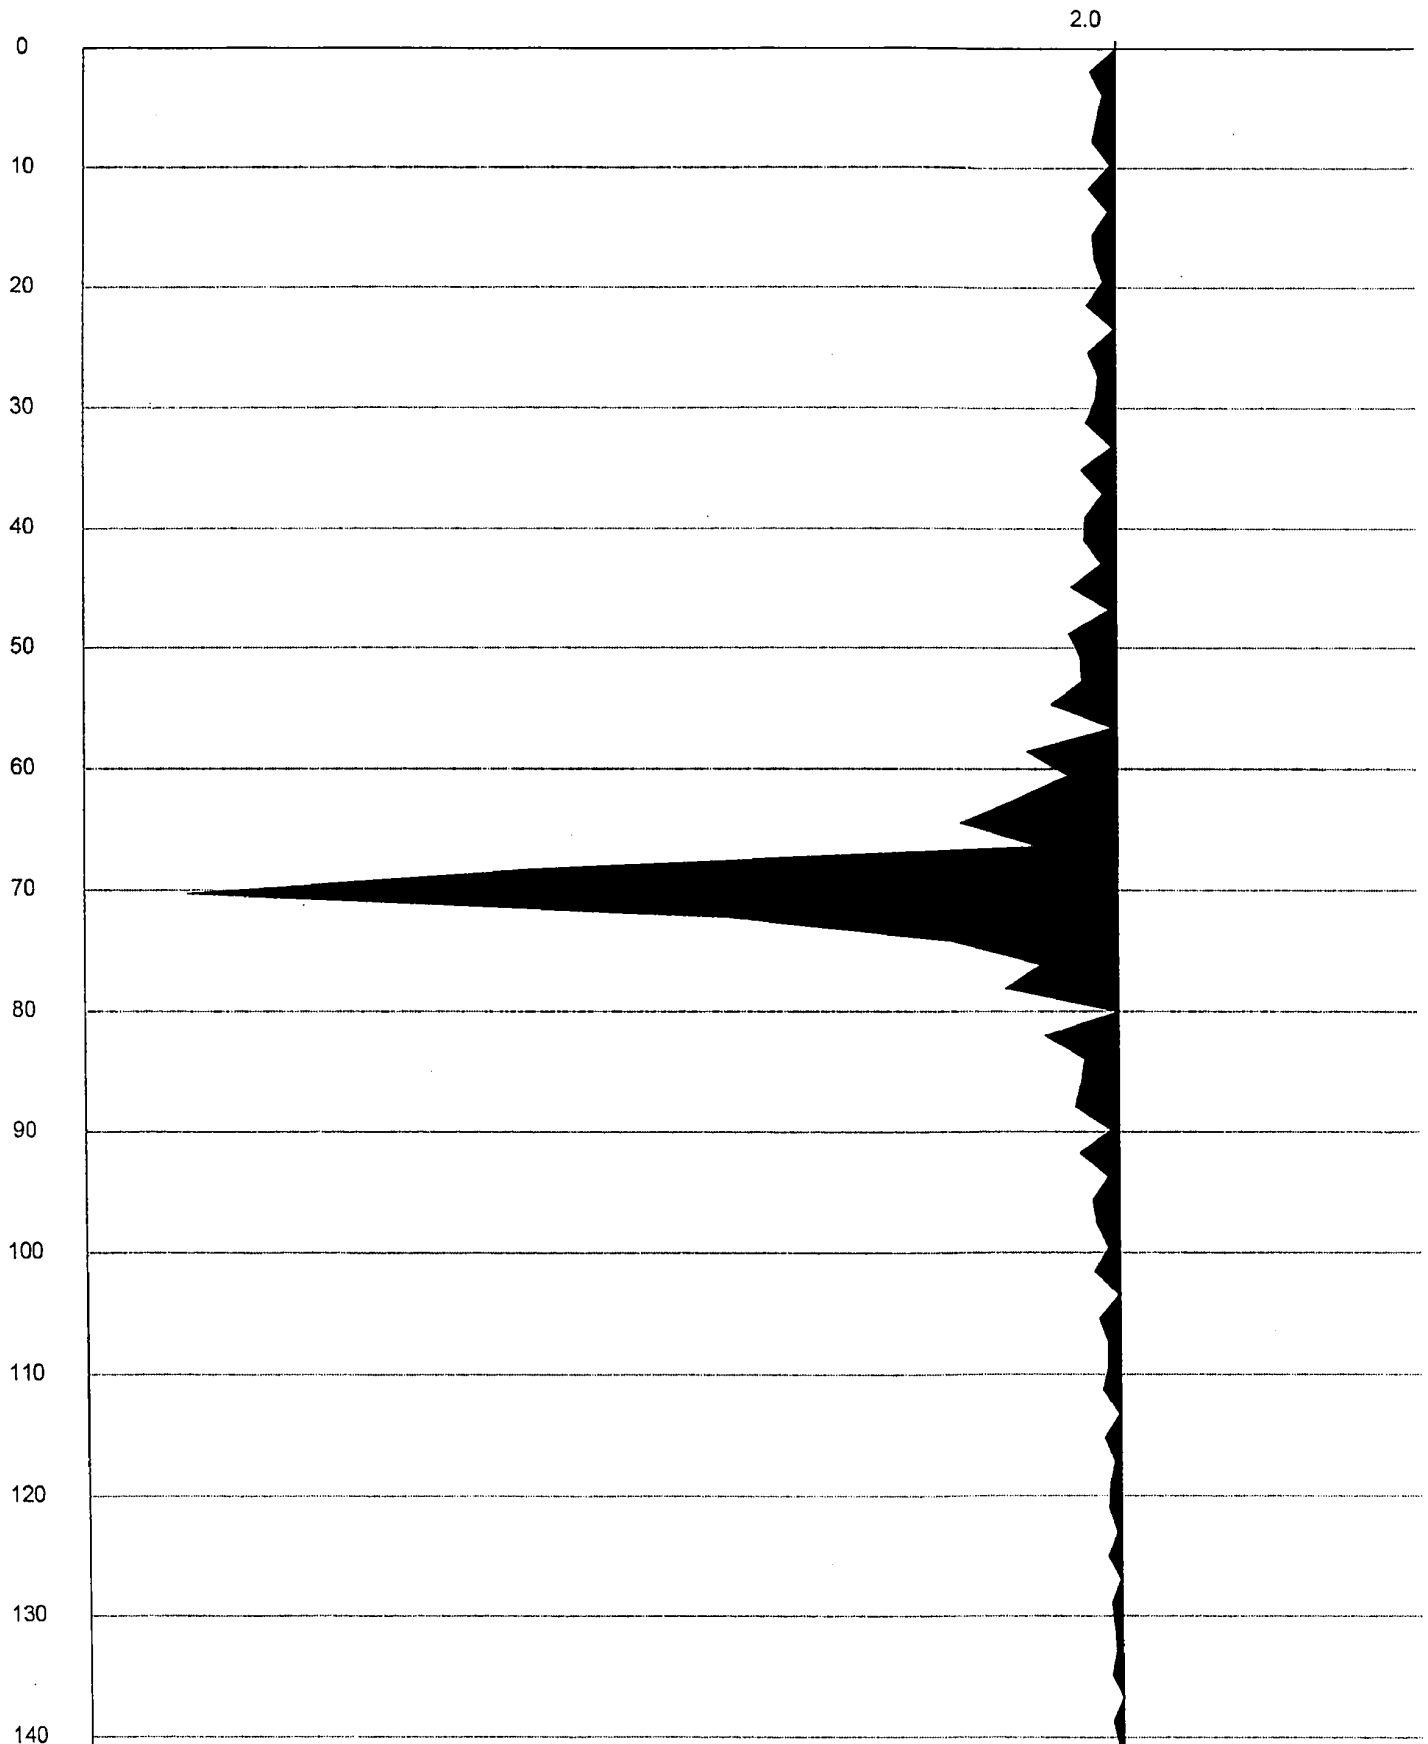

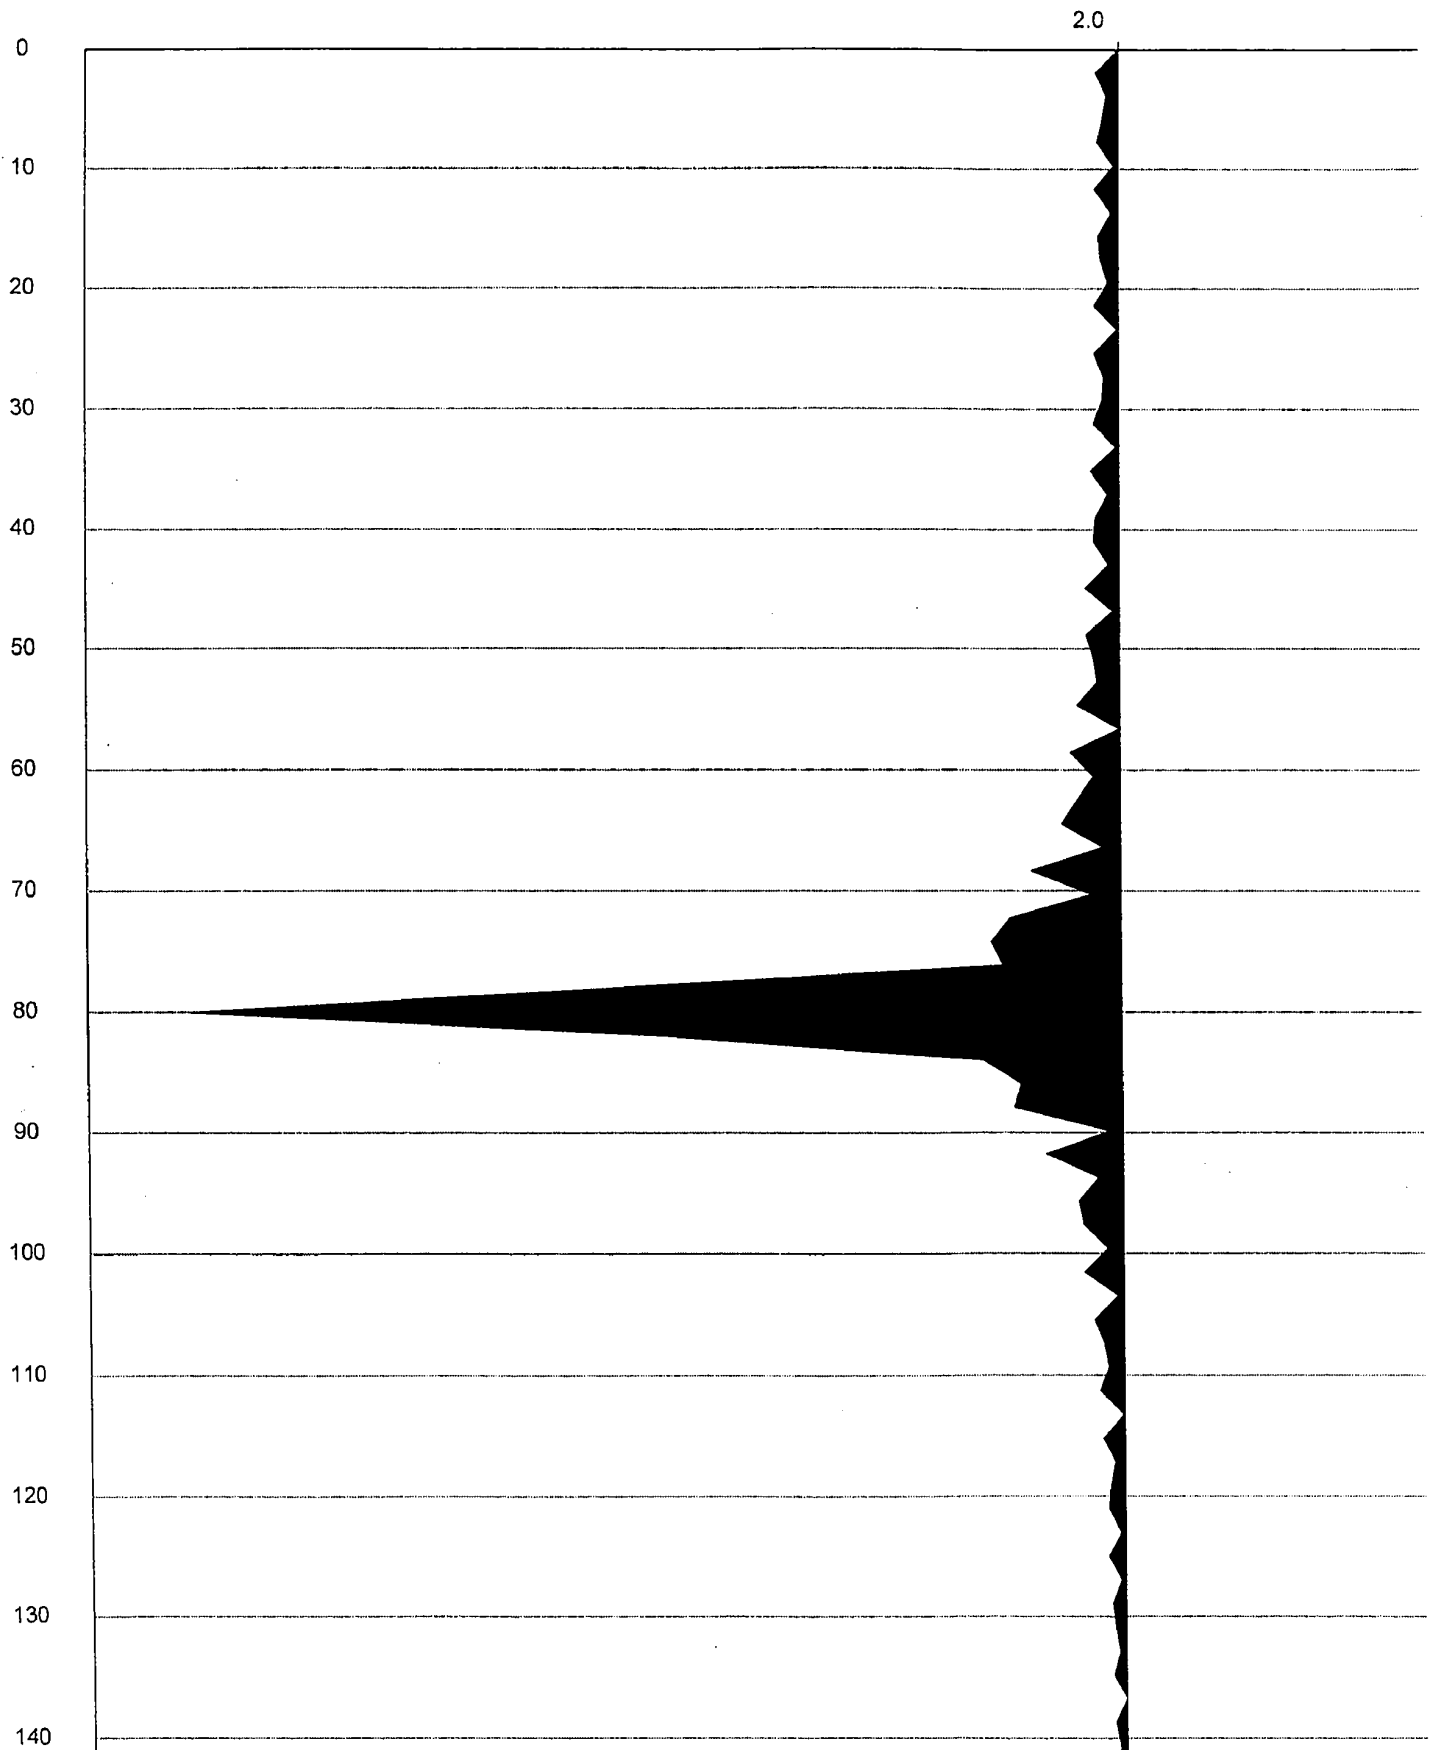

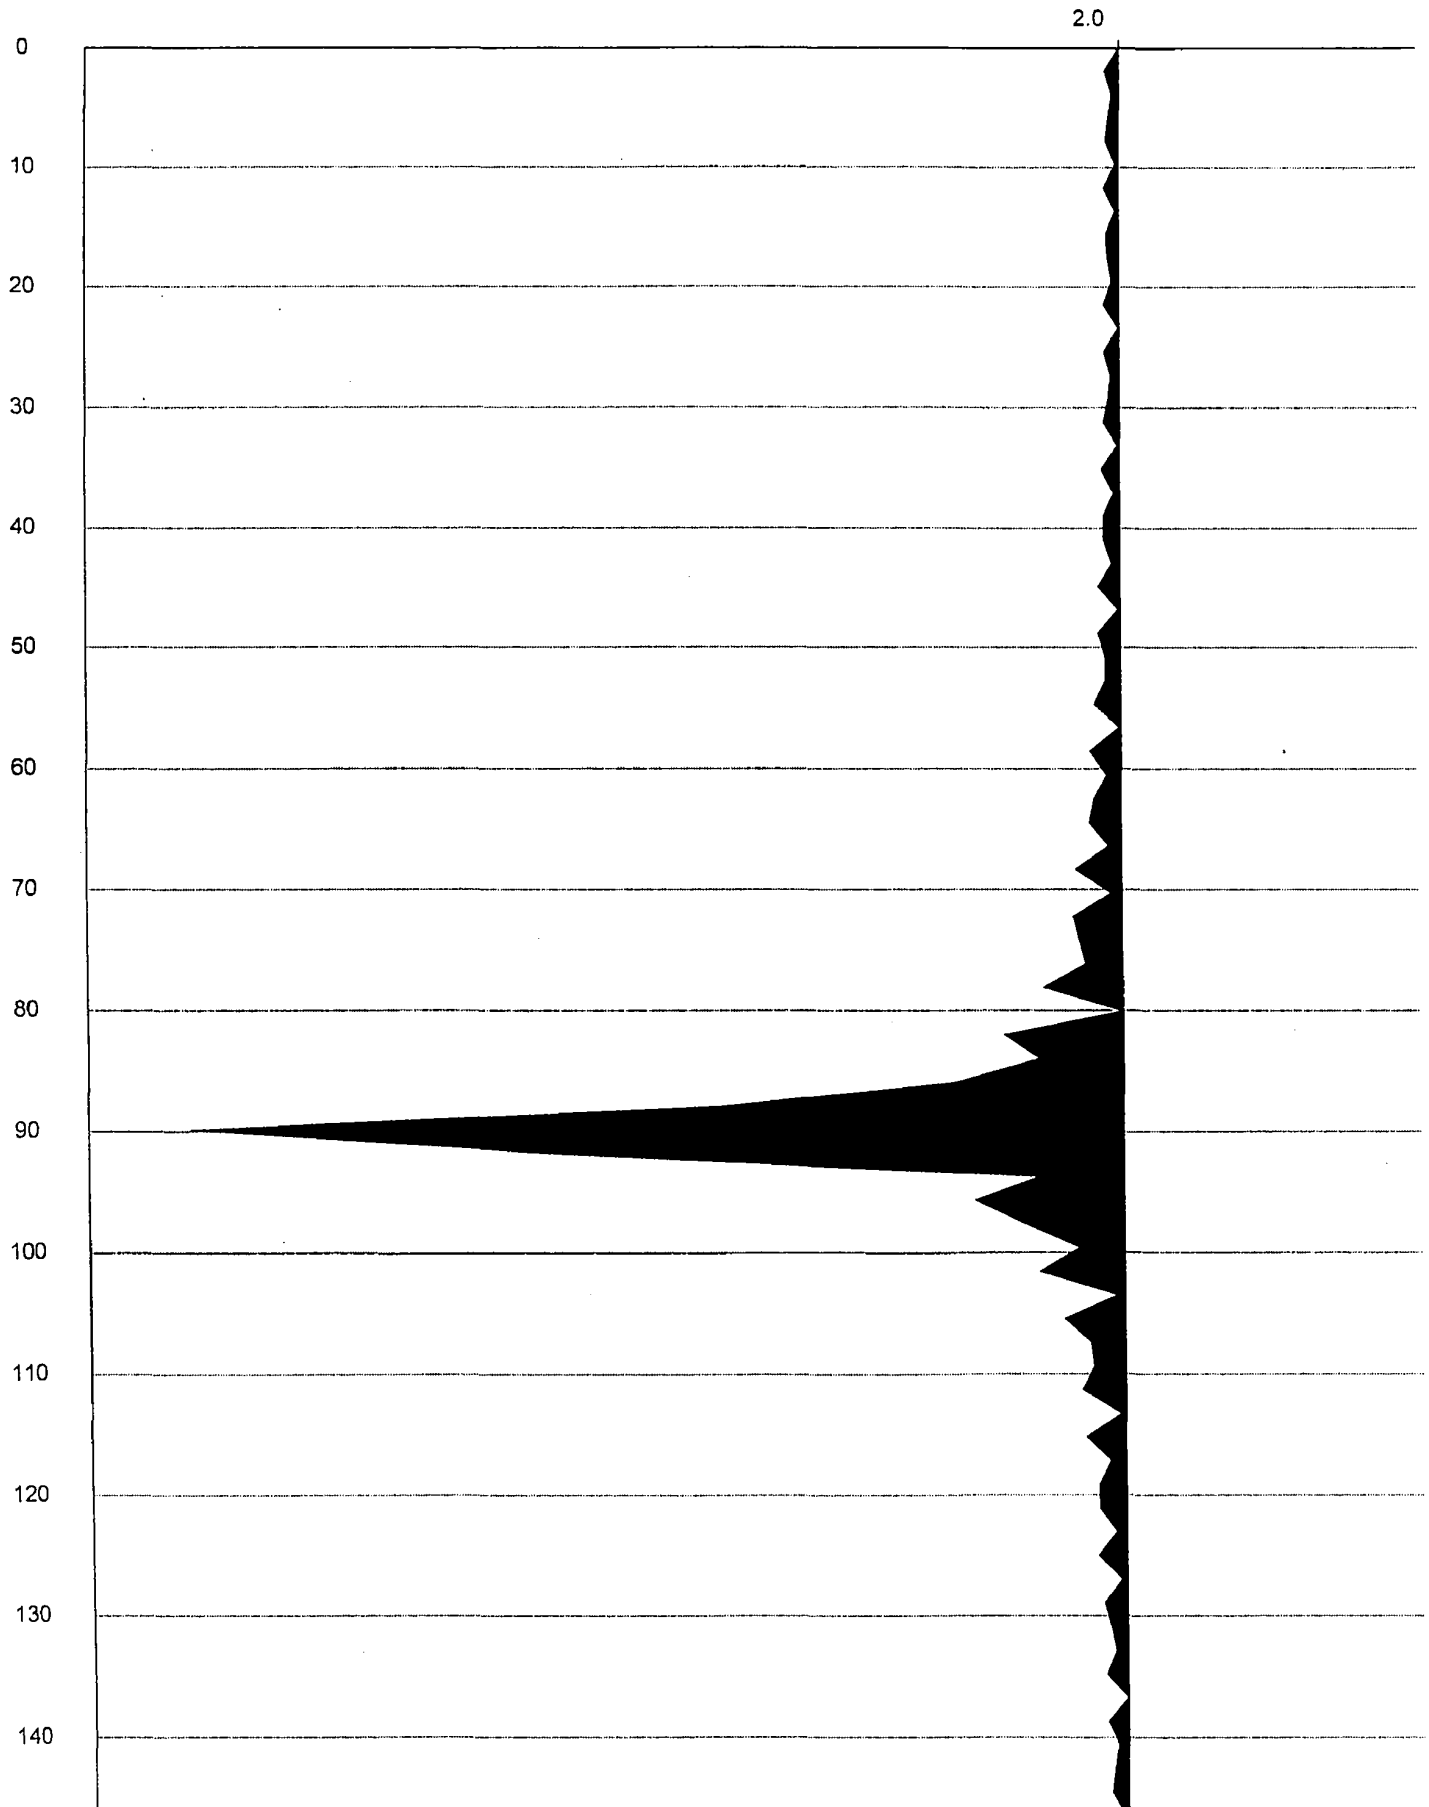

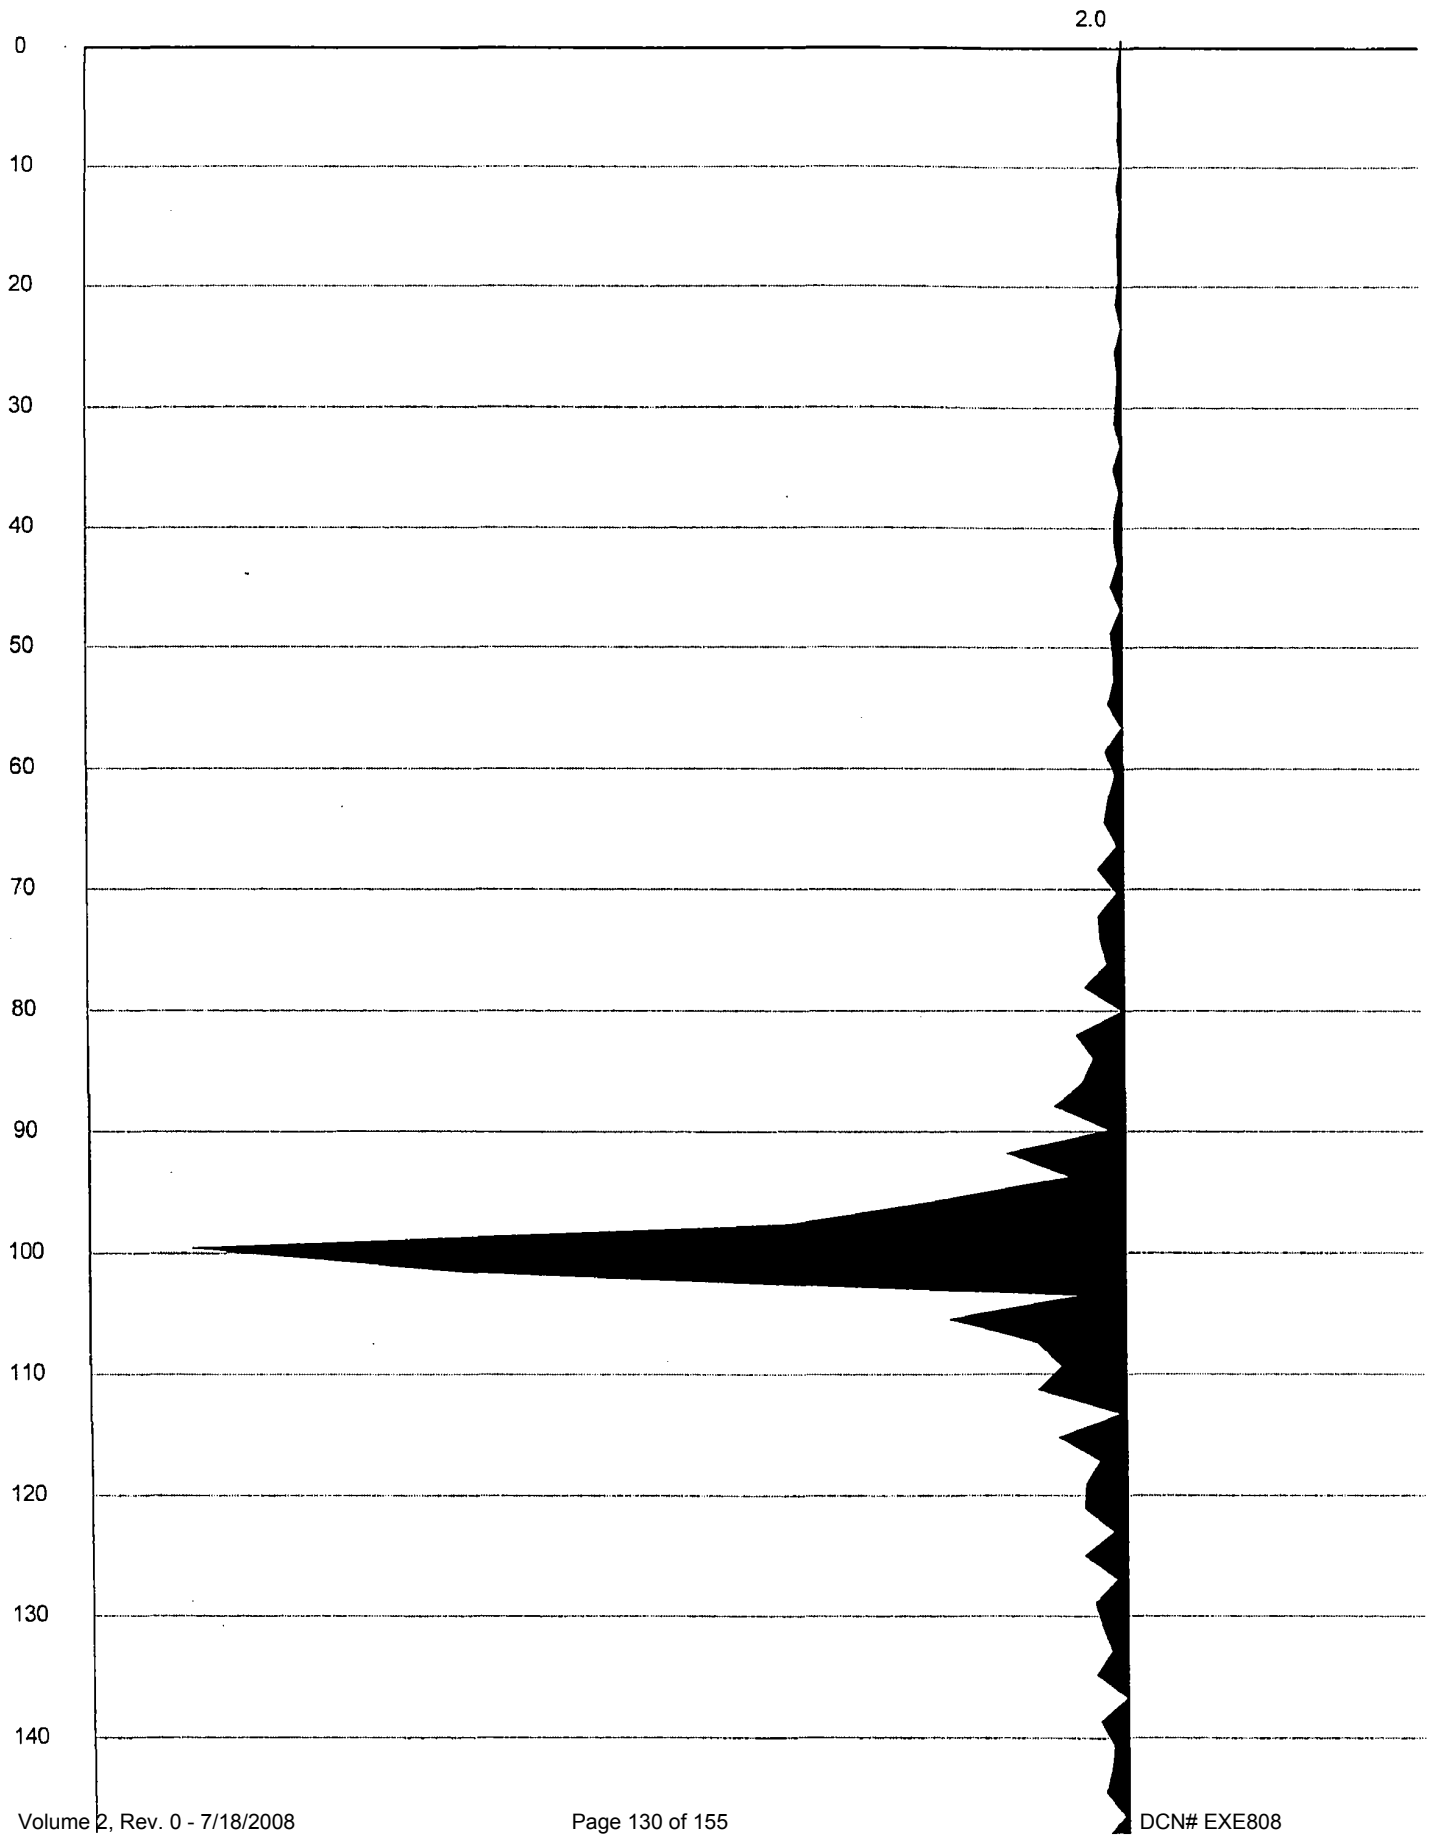

**POST JOB  
CALIBRATION  
VERIFICATION**

# Calibration Verification Certificate



Device Type: Piezo Cone Penetrometer


Device Number: F7.5CKEW2/B 1701-1498

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip readings in mV

Load lb	Load Tons	load/area tsf	Tip mV	TIP Cal Factor Mpa
0	0	0	0	0
605	0.3025	18.78882	35.7	50.3986015
5080	2.54	157.764	301.2	50.1579839
7520	3.76	233.5404	446.7	50.0648841
9960	4.98	309.3168	591.2	50.1021358
15150	7.575	470.4969	899.3	50.1001892
20040	10.02	622.3602	1190.2	50.0736325

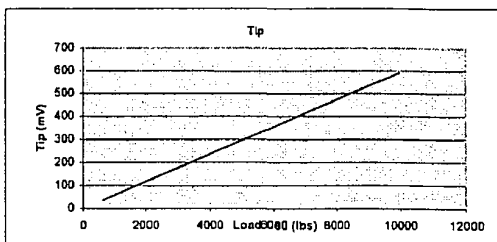


## FRICTION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>

Friction readings in mV

Load lb	Load Tons	load/area tsf	Friction mV	Friction Cal Factor Mpa
0	0	0	0	0
480	0.24	1.114724	211.7	0.50423566
2530	1.265	5.875523	1112.8	0.50561107
3610	1.805	8.383651	1586.7	0.50597092
5005	2.5025	11.62332	2197.3	0.50655651
7480	3.74	17.37111	3287.4	0.50601364

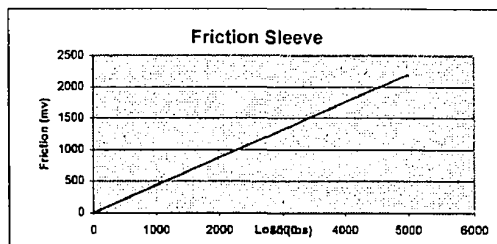


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial : 7056-1-133

Pore Pressure readings in mV

Pressure Pressure Transducer readings

psi	tsf	mV	P.Pres. Cal Factor Mpa
0	0	0	0
75	5.4	206.9	2.49931196
150	10.8	415.2	2.49088461
300	21.6	827.5	2.49961399

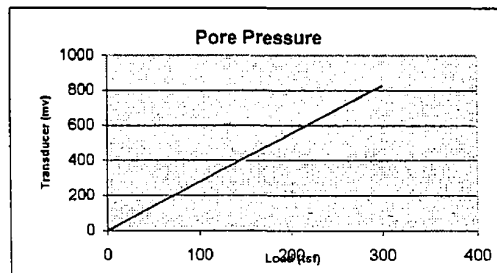

## Temperature Calibration (30 - 115 degrees F)

Temp (deg TIP (mV) FRIC (mV) PIEZO (mV)

30	1.623	1.032	-0.397
50	1.680	1.128	-0.946
75	1.728	1.331	-1.147
100	1.901	1.507	1.473
115	1.943	2.174	3.319

Deviation	mV	Mpa	% Full Scale
Tip	0.338	0.0169	0.0338
Friction	1.694	0.000847	0.1694
Piezo	5.714	0.014285	0.5714

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICTION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/NCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer

Date: 1/22/2008

Checked By : Recep Yilmaz



Date: 1/22/2008

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer-TIP			mV	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	3.4	3.4	0.01
Model Number	F7.5CKE3SW2/B			35.700000	605.0	604.5	0.5	0.00
Serial Number	1701-1498(Tip)			301.200000	5080.0	5074.9	5.1	-0.02
HGL Instrument Number	ft			446.700000	7520.0	7524.8	4.8	0.01
Excitation (V)				591.200000	9960.0	9957.9	2.1	-0.01
Gain/Span Setting	NA			899.300000	15150.0	15145.7	4.3	-0.01
Full Range Output (V)				1190.200000	20040.0	20043.8	3.8	0.01
Full Range/Capacity (lb)	33716							
Date Verified	1/22/2008							
Date Due	1/21/2009							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.							
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	Geotak							
Model Number	560K							
Serial Number	129739							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999999699							
Intercept (lb)	3.370369765							
Slope (lb/mV)	16.8378626							
Verification (Calib.) Factor	16.83786260							
Verification Factor Units	lb/mV							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	0.6157721							
Coverage Factor	2							
Expanded Uncertainty (lb)	1.2315442							
Max. Abs. or FS Error (%)	-0.02 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.							

MTS  Yes;  No

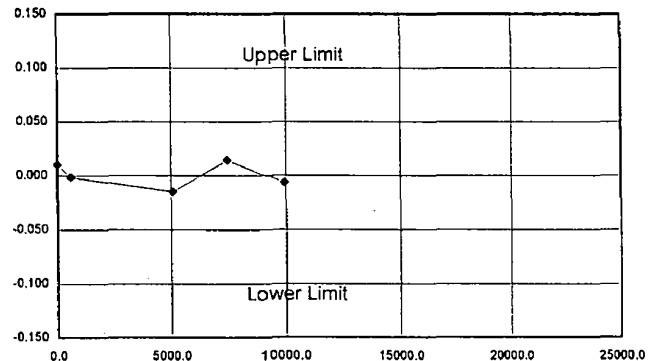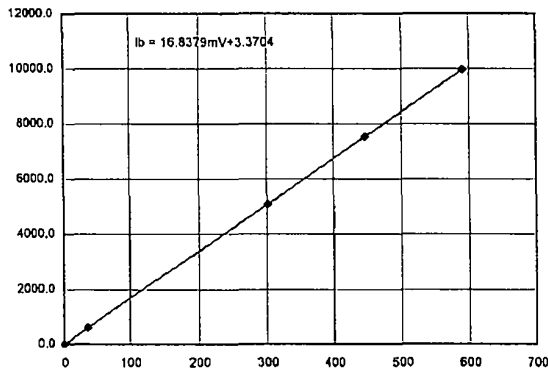

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.6158	N	1.0000	A	0.6158	0.3792	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.6158						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>							
			Coverage Factor		2		for 95% confidence level.

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.



(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: ES Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Jy  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer			mv	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	-1.0	1.0	-0.01
Model Number	F7.5CKEW2/B			211.700000	480.0	480.9	0.9	0.01
Serial Number	1701-1498 (Friction)			1112.800000	2530.0	2532.0	2.0	0.01
HGL Instrument Number	ft100			1586.700000	3610.0	3610.7	0.7	0.00
Excitation (V)				2197.300000	5005.0	5000.6	4.4	-0.03
Gain/Span Setting	NA			3287.400000	7480.0	7481.9	1.9	0.01
Full Range Output (V)								
Full Range/Capacity (lb)	16858							
Date Verified	1/22/2008							
Date Due	1/21/2009							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	INTERFACE							
Model Number	1211EX-10K-B							
Serial Number	113655							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999999261							
Intercept (lb)	-1.014317764							
Slope (lb/mv)	2.276240297							
Verification (Calib.) Factor	2.27624030							
Verification Factor Units	lb/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	0.567926155							
Coverage Factor	2							
Expanded Uncertainty (lb)	1.13585231							
Max. Abs. or FS Error (%)	-0.03	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
					MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No	

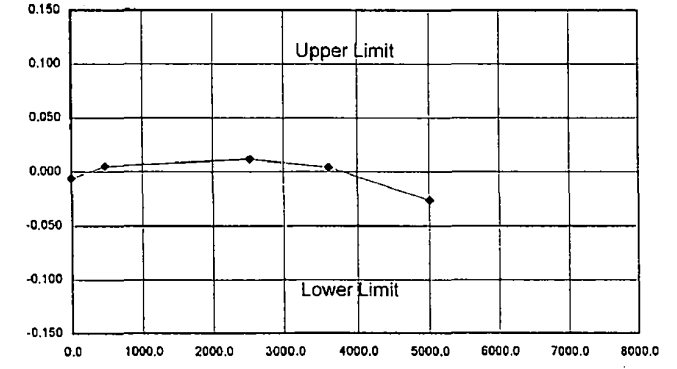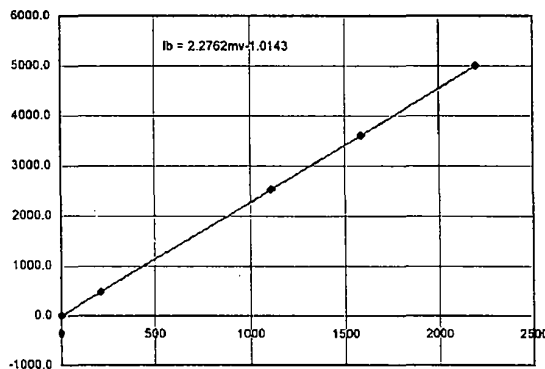

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.5679	N	1.0000	A	0.5679	0.3225	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.5679						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			Coverage Factor	2			for 95% confidence level.
					1.136		lb

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.  
 (3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_





### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard psi	Prediction psi	Abs. Error psi	Full Scale Error (%)
Type	Cone Penetrometer					
Manufacturer	Fugro	0.000000	0.0	-0.1	0.1	-0.03
Model Number	F7.5CKEW2/B	206.900000	75.0	74.9	0.1	-0.03
Serial Number	1701-1576-7056-1-133 (Piezo)	415.200000	150.0	150.4	0.4	0.11
HGL Instrument Number	pt	827.500000	300.0	299.8	0.2	-0.05
Excitation (V)						
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (psi)	360					
Date Verified	1/22/2008					
Date Due	1/21/2009					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.25					
Verification/Standard Equipment						
Type	PT(ANSI/NCSL APPROVED)					
Manufacturer	Eaton					
Model Number	UPS3000CC					
Serial Number	A0813					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999995874					
Intercept (psi)	-0.108198682					
Slope (psi/mv)	0.362467436					
Verification (Calib.) Factor	0.36246744					
Verification Factor Units	psi/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (psi)	0.066029689					
Coverage Factor	2					
Expanded Uncertainty (psi)	0.132059378					
Max. Abs. or FS Error (%)	0.11					

MTS  Yes;  No

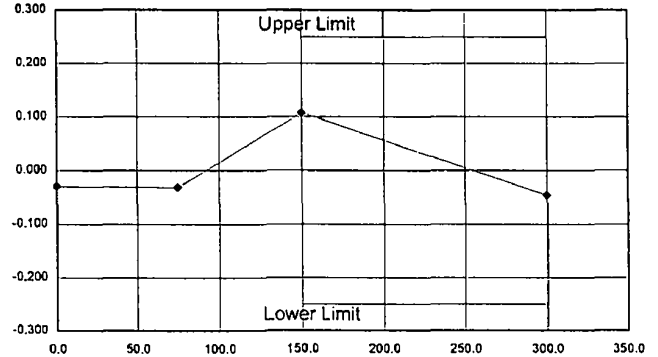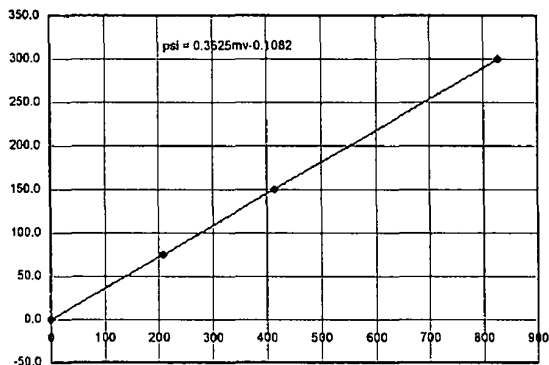

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.0660	N	1.0000	A	0.0660	0.0044	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.0660						
		Coverage Factor		2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	0.132			psi			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

# Calibration Verification Certificate



Device Type: Piezo Cone Penetrometer


Device Number: F7.5CKESW2/V 1701-1788

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip readings in mV

Load lb	Load Tons	load/area tsf	Tip mV	TIP Cal Factor Mpa
0	0	0	0	0
510	0.255	15.83851	30.3	50.0563149
4980	2.49	154.6584	295.3	50.1530353
7510	3.755	233.2298	446.3	50.0431198
10040	5.02	311.8012	595.4	50.1482993
14970	7.485	464.9068	889.4	50.0559839
19960	9.98	619.8758	1184.3	50.1222011

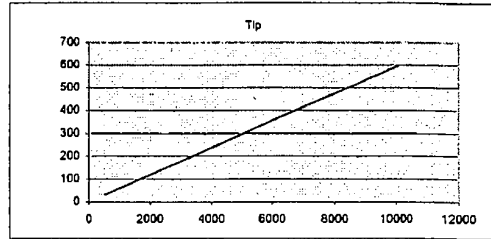


## FRICTION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>

Friction readings in mV

Load lb	Load Tons	load/area tsf	Friction mV	Friction Cal Factor Mpa
0	0	0	0	0
550	0.275	1.277288	243.8	0.50169776
2020	1.01	4.691129	890.4	0.50452117
3590	1.795	8.337204	1584.6	0.50383458
5100	2.55	11.84394	2250.7	0.50392481
7480	3.74	17.37111	3295.4	0.50478522

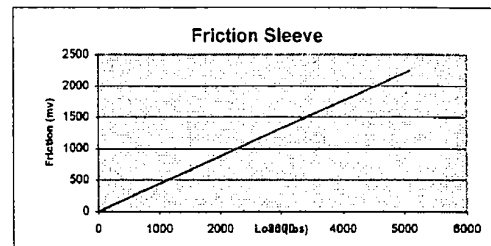


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial : 1233109

Pore Pressure readings in mV

Pressure Pressure Transducer readings

psi	tsf	mV	P.Pres. Cal Factor Mpa
0	0	0	0
75	5.4	206.3	2.50658092
150	10.8	413.5	2.50112525
300	21.6	824.8	2.50779653

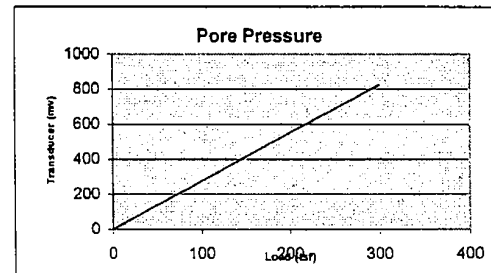

## Temperature Calibration (30 - 115 degrees F)

Temp (deg F)	TIP (mV)	FRIC (mV)	PIEZO (mV)	Deviation	mV	Mpa	% Full Scale
30	-0.010	-0.201	-0.098	Tip	0.255	0.01275	0.0255
50	0.002	-0.332	-0.073	Friction	2.859	0.00143	0.2859
75	0.015	-0.392	-0.049	Piezo	2.490	0.006225	0.249
100	0.143	1.978	-2.032				
115	0.245	2.658	-2.539				

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICTION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/NCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer

Date: 1/22/2008



Checked By : Recep Yilmaz

Date: 1/22/2008

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer_TIP			mV	lb	lb	lb	Error (%)
Manufacturer	Fugro			0.000000	0.0	-0.4	0.4	0.00
Model Number	F7.5CKESW2/B1			30.300000	510.0	510.1	0.1	0.00
Serial Number	1701-1788 (Tip)			295.300000	4980.0	4974.7	5.3	-0.02
HGL Instrument Number	ft			446.300000	7510.0	7518.7	8.7	0.03
Excitation (V)				595.400000	10040.0	10030.7	9.3	-0.03
Gain/Span Setting	NA			889.400000	14970.0	14983.9	13.9	0.04
Full Range Output (V)				1184.300000	19960.0	19952.3	7.7	-0.02
Full Range/Capacity (lb)	33716							
Date Verified	1/22/2008							
Date Due	1/21/2009							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	Load Cell (A2AL APPROVED)							
Manufacturer	Geolac							
Model Number	560K							
Serial Number	129739							
HGL Instrument Number								
Date Verified								
Temperature	°C = °F							
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999998634							
Intercept (lb)	-0.389801857							
Slope (lb/mV)	16.84763982							
Verification (Calib.) Factor	16.84763982							
Verification Factor Units	lb/mV							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (lb)	1.882927137							
Coverage Factor	2							
Expanded Uncertainty (lb)	3.765854274							
Max. Abs. or FS Error (%)	0.04	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
				MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No		

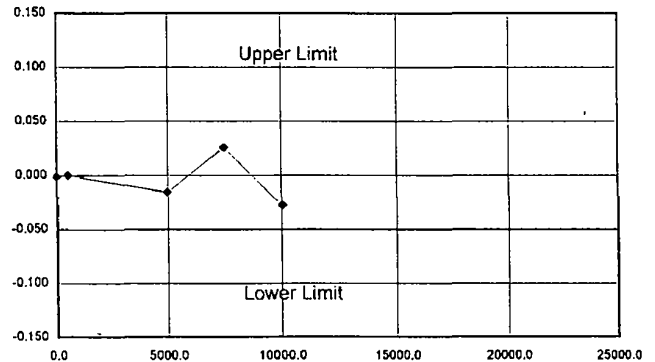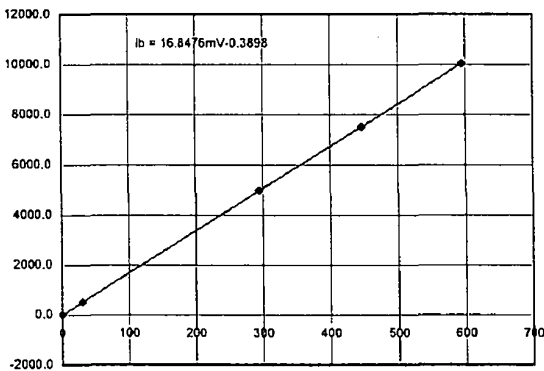

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	1.8829	N	1.0000	A	1.8829	3.5454	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	1.8829		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	3.766			lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.



Verified By: AS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard lb	Prediction lb	Abs. Error lb	Full Scale Error (%)
Type	Cone Penetrometer	0.000000	0.0	-3.4	3.4	-0.02
Manufacturer	Fugro	243.800000	550.0	549.8	0.2	0.00
Model Number	F7.5CKESW2/B1	890.400000	2020.0	2017.0	3.0	-0.02
Serial Number	1701-1788 (Friction)	1587.600000	3590.0	3599.0	9.0	0.05
HGL Instrument Number	ft100	2250.700000	5100.0	5103.6	3.6	0.02
Excitation (V)		3295.400000	7480.0	7474.1	5.9	-0.04
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (lb)	16858					
Date Verified	1/22/2008					
Date Due	1/21/2009					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.					
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	INTERFACE					
Model Number	1211EX-10K-B					
Serial Number	113655					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999996337					
Intercept (lb)	-3.393488832					
Slope (lb/mv)	2.269059971					
Verification (Calib.) Factor	2.26905997					
Verification Factor Units	lb/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	1.213348951					
Coverage Factor	2					
Expanded Uncertainty (lb)	2.426697903					
Max. Abs. or FS Error (%)	0.05 <input checked="" type="checkbox"/> FS; <input type="checkbox"/> Abs.					

MTS  Yes;  No

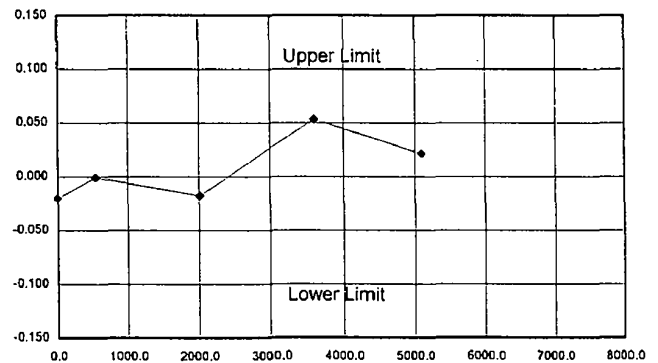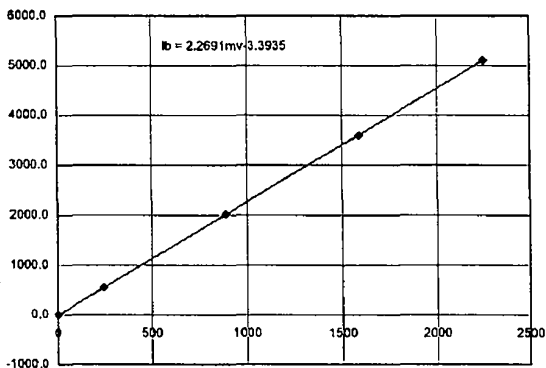

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	1.2133	N	1.0000	A	1.2133	1.4722	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	1.2133						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			2.427	lb			
			Coverage Factor		2		for 95% confidence level.

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations: i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.



(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: DS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data				Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer			mv	psi	psi	psi	Error (%)
Manufacturer	Fugro			0.000000	0.0	-0.1	0.1	-0.03
Model Number	F7.5CKESW2/B1			206.300000	75.0	74.9	0.1	-0.02
Serial Number	1701-1788-1233109 (Piezo)			413.500000	150.0	150.3	0.3	0.08
HGL Instrument Number	pt			824.800000	300.0	299.9	0.1	-0.04
Excitation (V)								
Gain/Span Setting	NA							
Full Range Output (V)								
Full Range/Capacity (psi)	360							
Date Verified	1/22/2008							
Date Due	1/21/2009							
Service Status	In Service							
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
Verification/Standard Equipment								
Type	PT(ANSI/NCSL APPROVED)							
Manufacturer	Eaton							
Model Number	UPS3000CC							
Serial Number	A0813							
HGL Instrument Number								
Date Verified								
Temperature	°C =	°F						
Linear Regression, Uncertainty, & Error Summary								
Correlation Coeff. (R <sup>2</sup> )	0.999997701							
Intercept (psi)	-0.094255964							
Slope (psi/mv)	0.363683389							
Verification (Calib.) Factor	0.36368339							
Verification Factor Units	psi/mv							
Absolute Zero (V)								
Floating Zero (V)								
Combined Uncertainty (psi)	0.0497694							
Coverage Factor	2							
Expanded Uncertainty (psi)	0.099538799							
Max. Abs. or FS Error (%)	0.08	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.					
				MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No		

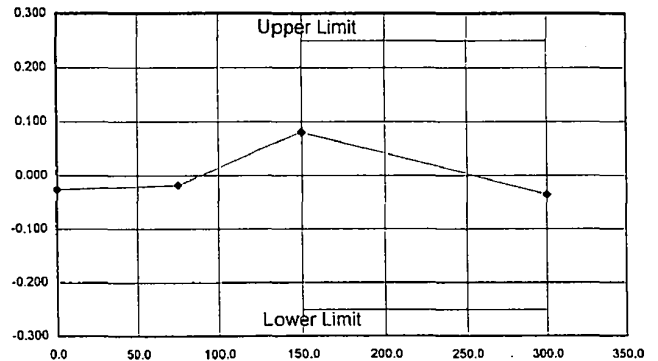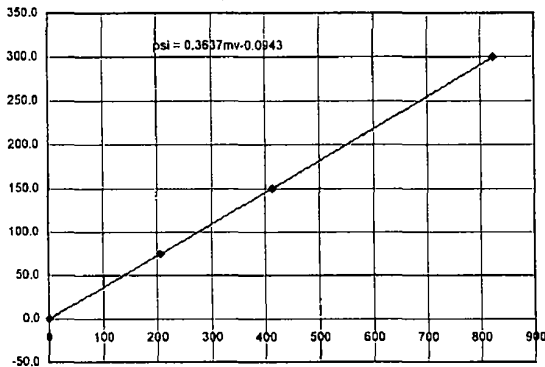

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.0498	N	1.0000	A	0.0498	0.0025	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.0498	Coverage Factor		2	for 95% confidence level.		
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	0.100			psi			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

# Calibration Verification Certificate



Device Type: Piezo Cone Penetrometer


Device Number: **F7.5CKEW2/V 1701-1832**

## TIP CALIBRATION

Tip area = 15 cm<sup>2</sup> = 0.0161 ft<sup>2</sup>

Tip readings in mV

Load lb	Load Tons	load/area tsf	Tip mV	TIP Cal Factor Mpa
0	0	0	0	0
605	0.3025	18.78882	35.9	50.1178293
5200	2.6	161.4907	308.2	50.1766931
8120	4.06	252.1739	481.7	50.1315012
9990	4.995	310.2484	592.8	50.1174101
15100	7.55	468.9441	895.2	50.1635427
19990	9.995	620.8075	1184.6	50.1848225

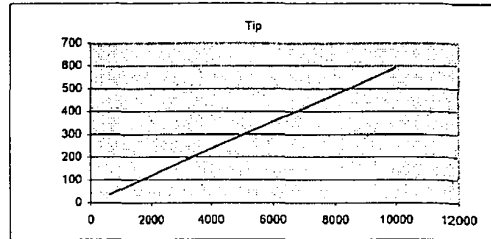


## FRICTION CALIBRATION

Sleeve area = 200 cm<sup>2</sup> = 0.2153 ft<sup>2</sup>

Friction readings in mV

Load lb	Load Tons	load/area tsf	Friction mV	Friction Cal Factor Mpa
0	0	0	0	0
550	0.275	1.277288	243.1	0.50314238
2030	1.015	4.714352	899.6	0.50183363
3540	1.77	8.221087	1552.8	0.50699177
5010	2.505	11.63493	2218.3	0.50226234
7480	3.74	17.37111	3310.2	0.50252831

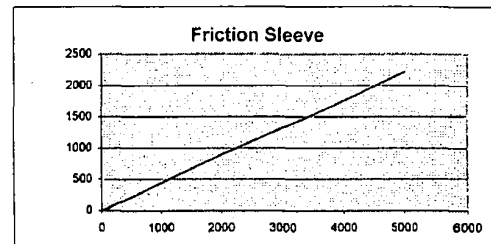


## PORE PRESSURE TRANSDUCER CALIBRATION

Serial : 123312

Pore Pressure readings in mV

Pressure Pressure Transducer readings

psi	tsf	mV	P.Pres. Cal Factor Mpa
0	0	0	0
75	5.4	208.9	2.47538365
150	10.8	414.1	2.4975013
300	21.6	834.2	2.47953797

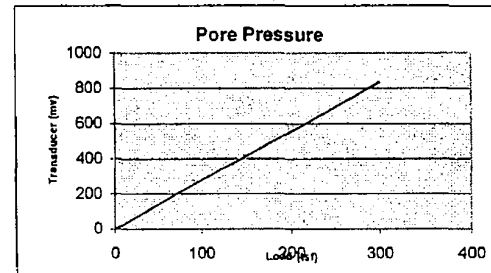

## Temperature Calibration (30 - 115 degrees F)

Temp (deg F)	TIP (mV)	FRIC (mV)	PIEZO (mV)	Deviation mV	Mpa	% Full Scale
30	-0.009	0.195	-0.052	Tip	0.238	0.0119
50	-0.041	0.207	0.135	Friction	3.180	0.00159
75	-0.046	0.284	0.148	Piezo	3.018	0.007545
100	-0.133	2.812	-2.345			
115	-0.247	3.375	-2.883			

TIP CALIBRATED BY GEOTAC (A2LA APPROVED) LOAD CELL:

Model 560K, Serial No. 129739

FRICTION CALIBRATED BY INTERFACE (A2LA APPROVED) LOAD CELL :

Model: 1211EX-10K-B, Serial : 113655

PORE PRESSURE TRANSDUCER CALIBRATED BY GE SENSING (AANSI/NCSL APPROVED)

Pressure Indicator Model: UPS3000CC, Serial : A0813

TEMPERATURE CALIBRATED BY HOUSTON PRECISION TYPE K THERMOCOUPLE (A2LA APPROVED)

Model # 8528-40, Serial # C95005824, ID # TD-001

Calibration Verified by: Dennis Stauffer *DS*

Date: 1/22/2008



Checked By : Recep Yilmaz *RY*

Date: 1/22/2008

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.00001

Instrument Identification/Data		Instrument	Standard	Prediction	Abs. Error	Full Scale
Type	Cone Penetrometer_TIP	mV	lb	lb	lb	Error (%)
Manufacturer	Fugro	0.000000	0.0	-2.9	2.9	-0.01
Model Number	F7.5CKEW2/B1	35.900000	605.0	602.8	2.2	-0.01
Serial Number	1701-1832 (Tip)	308.200000	5200.0	5197.1	2.9	-0.01
HGL Instrument Number	ft	481.700000	8120.0	8124.4	4.4	0.01
Excitation (V)		592.800000	9990.0	9998.9	8.9	0.03
Gain/Span Setting	NA	895.200000	15100.0	15101.0	1.0	0.00
Full Range Output (V)		1184.600000	19990.0	19983.8	6.2	-0.02
Full Range/Capacity (lb)	33716					
Date Verified	1/22/2008					
Date Due	1/21/2009					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	Geotac					
Model Number	560K					
Serial Number	129739					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999999507					
Intercept (lb)	-2.944801092					
Slope (lb/mV)	16.87217402					
Verification (Calib.) Factor	16.87217402					
Verification Factor Units	lb/mV					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	1.009640807					
Coverage Factor	2					
Expanded Uncertainty (lb)	2.019281615					
Max. Abs. or FS Error (%)	0.03	<input checked="" type="checkbox"/> FS;	<input type="checkbox"/> Abs.			
		MTS	<input type="checkbox"/> Yes;	<input checked="" type="checkbox"/> No		

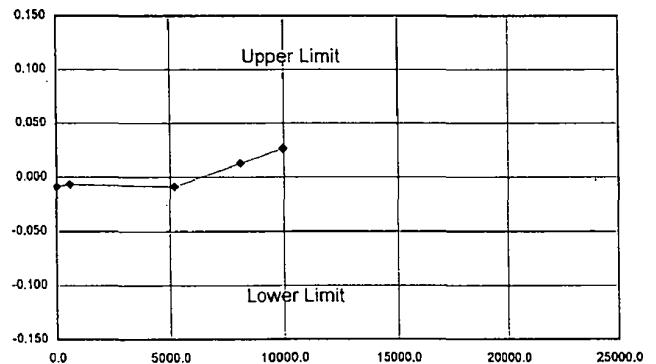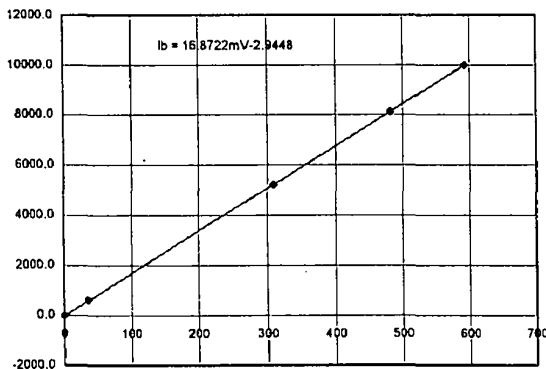

Uncertainty Budget Analysis For ft							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	1.0096	N	1.0000	A	1.0096	1.0194	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	1.0096		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>	2.019			lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean. (2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.



Verified By: MS Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: Ry  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: ft100 Location: \_\_\_\_\_ LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard lb	Prediction lb	Abs. Error lb	Full Scale Error (%)
Type	Cone Penetrometer	0.000000	0.0	3.7	3.7	0.02
Manufacturer	Fugro	243.100000	550.0	553.2	3.2	0.02
Model Number	F7.5CKEW2/B1	899.600000	2030.0	2037.0	7.0	0.04
Serial Number	1701-1832 (Friction)	1552.800000	3540.0	3513.3	26.7	-0.16
HGL Instrument Number	ft100	2218.300000	5010.0	5017.5	7.5	0.04
Excitation (V)		3310.200000	7480.0	7485.4	5.4	0.03
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (lb)	16858					
Date Verified	1/22/2008					
Date Due	1/21/2009					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.1	<input checked="" type="checkbox"/> FS;				<input type="checkbox"/> Abs.
Verification/Standard Equipment						
Type	Load Cell (A2AL APPROVED)					
Manufacturer	INTERFACE					
Model Number	1211EX-10K-B					
Serial Number	113655					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999978435					
Intercept (lb)	3.70130146					
Slope (lb/mv)	2.260188739					
Verification (Calib.) Factor	2.26018874					
Verification Factor Units	lb/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (lb)	3.62518158					
Coverage Factor	2					
Expanded Uncertainty (lb)	7.25036316					
Max. Abs. or FS Error (%)	-0.16	<input checked="" type="checkbox"/> FS;				<input type="checkbox"/> Abs.

MTS  Yes;  No

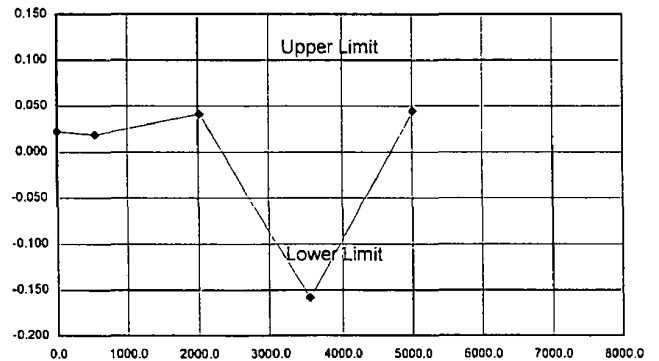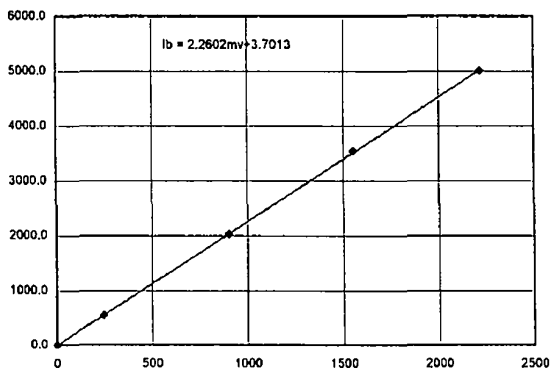

Uncertainty Budget Analysis For ft100							
Source of Uncertainty	Value in lb	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	3.6252	N	1.0000	A	3.6252	13.1419	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	3.6252		Coverage Factor	2			for 95% confidence level.
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			7.250	lb			

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_





### HGL Instrument Verification

DATE: 1/22/2008 Instrument No.: pt Location: Houston LVDT?:  Yes;  No  
 Type Analysis:  BF;  NonBF;  FS;  Abs. Reading Resolution of Instrument: 0.000001

Instrument Identification/Data		Instrument mv	Standard psi	Prediction psi	Abs. Error psi	Full Scale Error (%)
Type	Cone Penetrometer					
Manufacturer	Fugro	0.000000	0.0	0.2	0.2	0.05
Model Number	F7.5CKEW2/B1	208.900000	75.0	75.3	0.3	0.09
Serial Number	1701-1832-123312 (Piezo)	414.100000	150.0	149.2	0.8	-0.23
HGL Instrument Number	pt	834.200000	300.0	300.3	0.3	0.09
Excitation (V)						
Gain/Span Setting	NA					
Full Range Output (V)						
Full Range/Capacity (psi)	360					
Date Verified	1/22/2008					
Date Due	1/21/2009					
Service Status	In Service					
Accept. Abs. or FS Error (%)	0.25	<input checked="" type="checkbox"/> FS;				<input type="checkbox"/> Abs.
Verification/Standard Equipment						
Type	PT(ANSI/NCSL APPROVED)					
Manufacturer	Eaton					
Model Number	UPS3000CC					
Serial Number	A0813					
HGL Instrument Number						
Date Verified						
Temperature	°C = °F					
Linear Regression, Uncertainty, & Error Summary						
Correlation Coeff. (R <sup>2</sup> )	0.999980929					
Intercept (psi)	0.168019664					
Slope (psi/mv)	0.359818777					
Verification (Calib.) Factor	0.35981878					
Verification Factor Units	psi/mv					
Absolute Zero (V)						
Floating Zero (V)						
Combined Uncertainty (psi)	0.143768546					
Coverage Factor	2					
Expanded Uncertainty (psi)	0.287537093					
Max. Abs. or FS Error (%)	-0.23	<input checked="" type="checkbox"/> FS;				<input type="checkbox"/> Abs.

MTS  Yes;  No

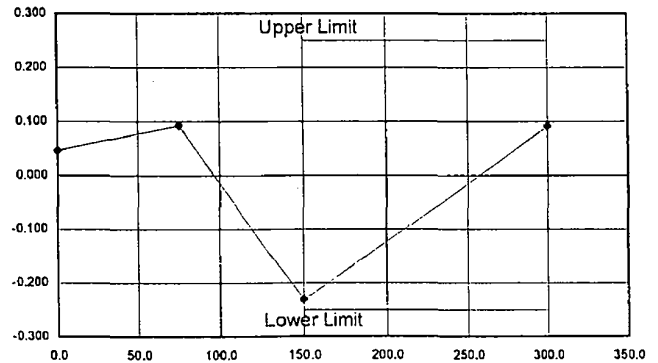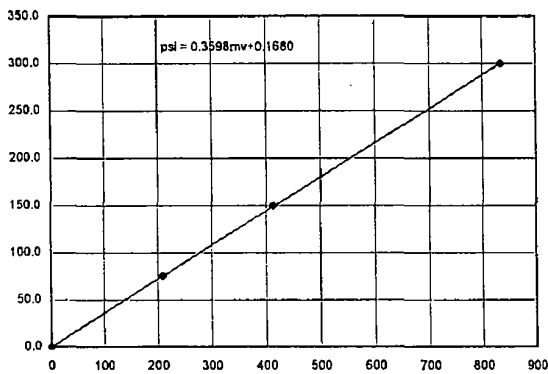

Uncertainty Budget Analysis For pt							
Source of Uncertainty	Value in psi	Distribution	Divisor	Type	Uncertainty (u <sub>i</sub> )	u <sub>i</sub> <sup>2</sup>	Comments
Standard's Uncertainty		N	2.0000	B			
Abs. Error-STDEV <sup>1</sup>	0.1438	N	1.0000	A	0.1438	0.0207	
Resolution of Instrument	0.0000	R	3.4641	B	0.0000	0.0000	
Repeatability <sup>2</sup>		N	1.0000	A			
Resolution of Standard	#N/A	R	3.4641	B			
Combined Uncertainty	0.1438						
Expanded Uncertainty (Best Measurement Capability) <sup>3</sup>			Coverage Factor	2			for 95% confidence level.
			0.288		psi		

(1) This equation follows the approach presented by A2LA, not that typically used in uncertainty calculations; i.e., STDEV of the Mean.

(2) This value is unique for type (model) of equipment.

(3) This uncertainty represents an expanded uncertainty expressed as approximately the 95% confidence level using a coverage factor of k=2.

Verified By: [Signature] Input By: \_\_\_\_\_ Reviewed By: \_\_\_\_\_ Checked By: [Signature]  
 File: \_\_\_\_\_  
 Remarks: \_\_\_\_\_

# Calibration Verification Certificate



Device Type: Seismograph


Device Manufacturer Geometrics, Inc.

Model Number: ES-3000

Serial Number: 5138

## Frequency (Hz)

Input	Seismograph
10.055	9.9
20.037	19.9
30.071	29.3
40.040	40.1
50.061	50.6
60.048	60.3
70.005	70.2
80.011	79.9
90.090	90.1
100.014	99.8

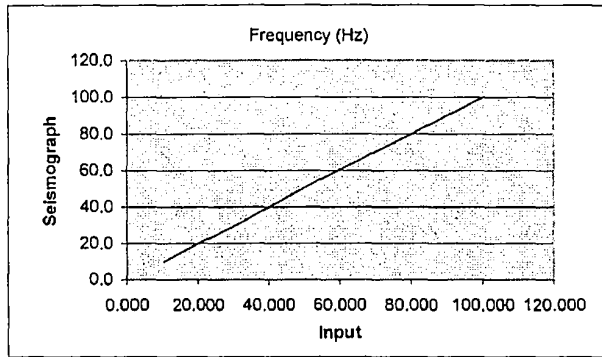

FREQUENCY CALIBRATED BY INSTEK GOOD WILL INSTRUMENTS (A2LA APPROVED) FREQUENCY COUNTER :

Model: GFC-80101H, Serial No. CF871549

FREQUENCY GENERATED BY EZ DIGITAL, INC (A2LA APPROVED) OSCILLISCOPE WITH BUILT IN FUNCTION GENERATOR


Model: OS-5020G, Serial No.: 3080209

Calibration Verified by: Dennis Stauffer


Date: 1/22/2008

Checked By : Recep Yilmaz

Date: 1/22/2008

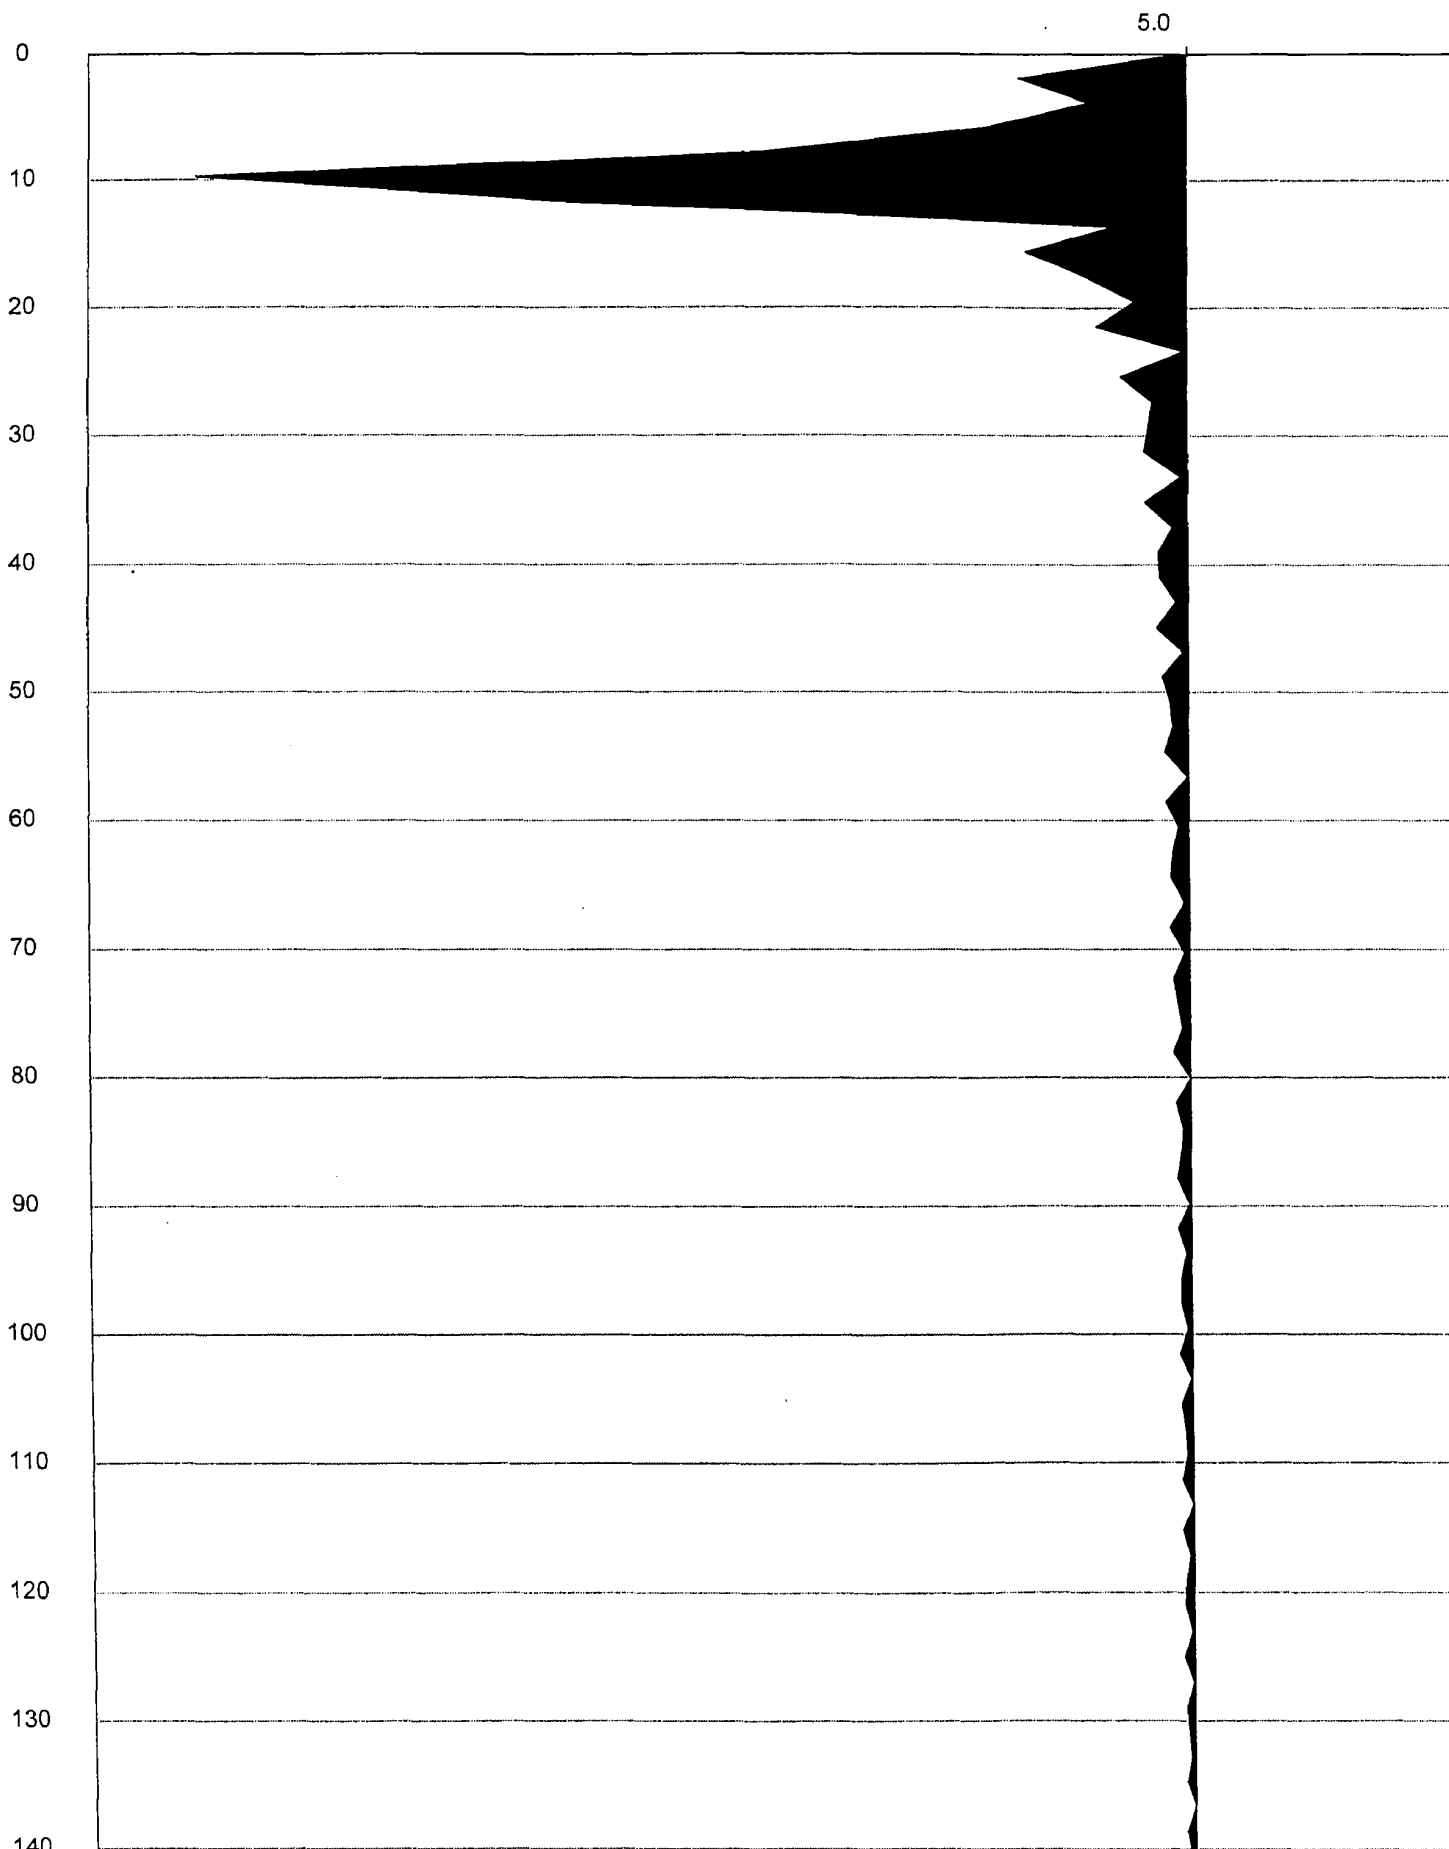

5.0

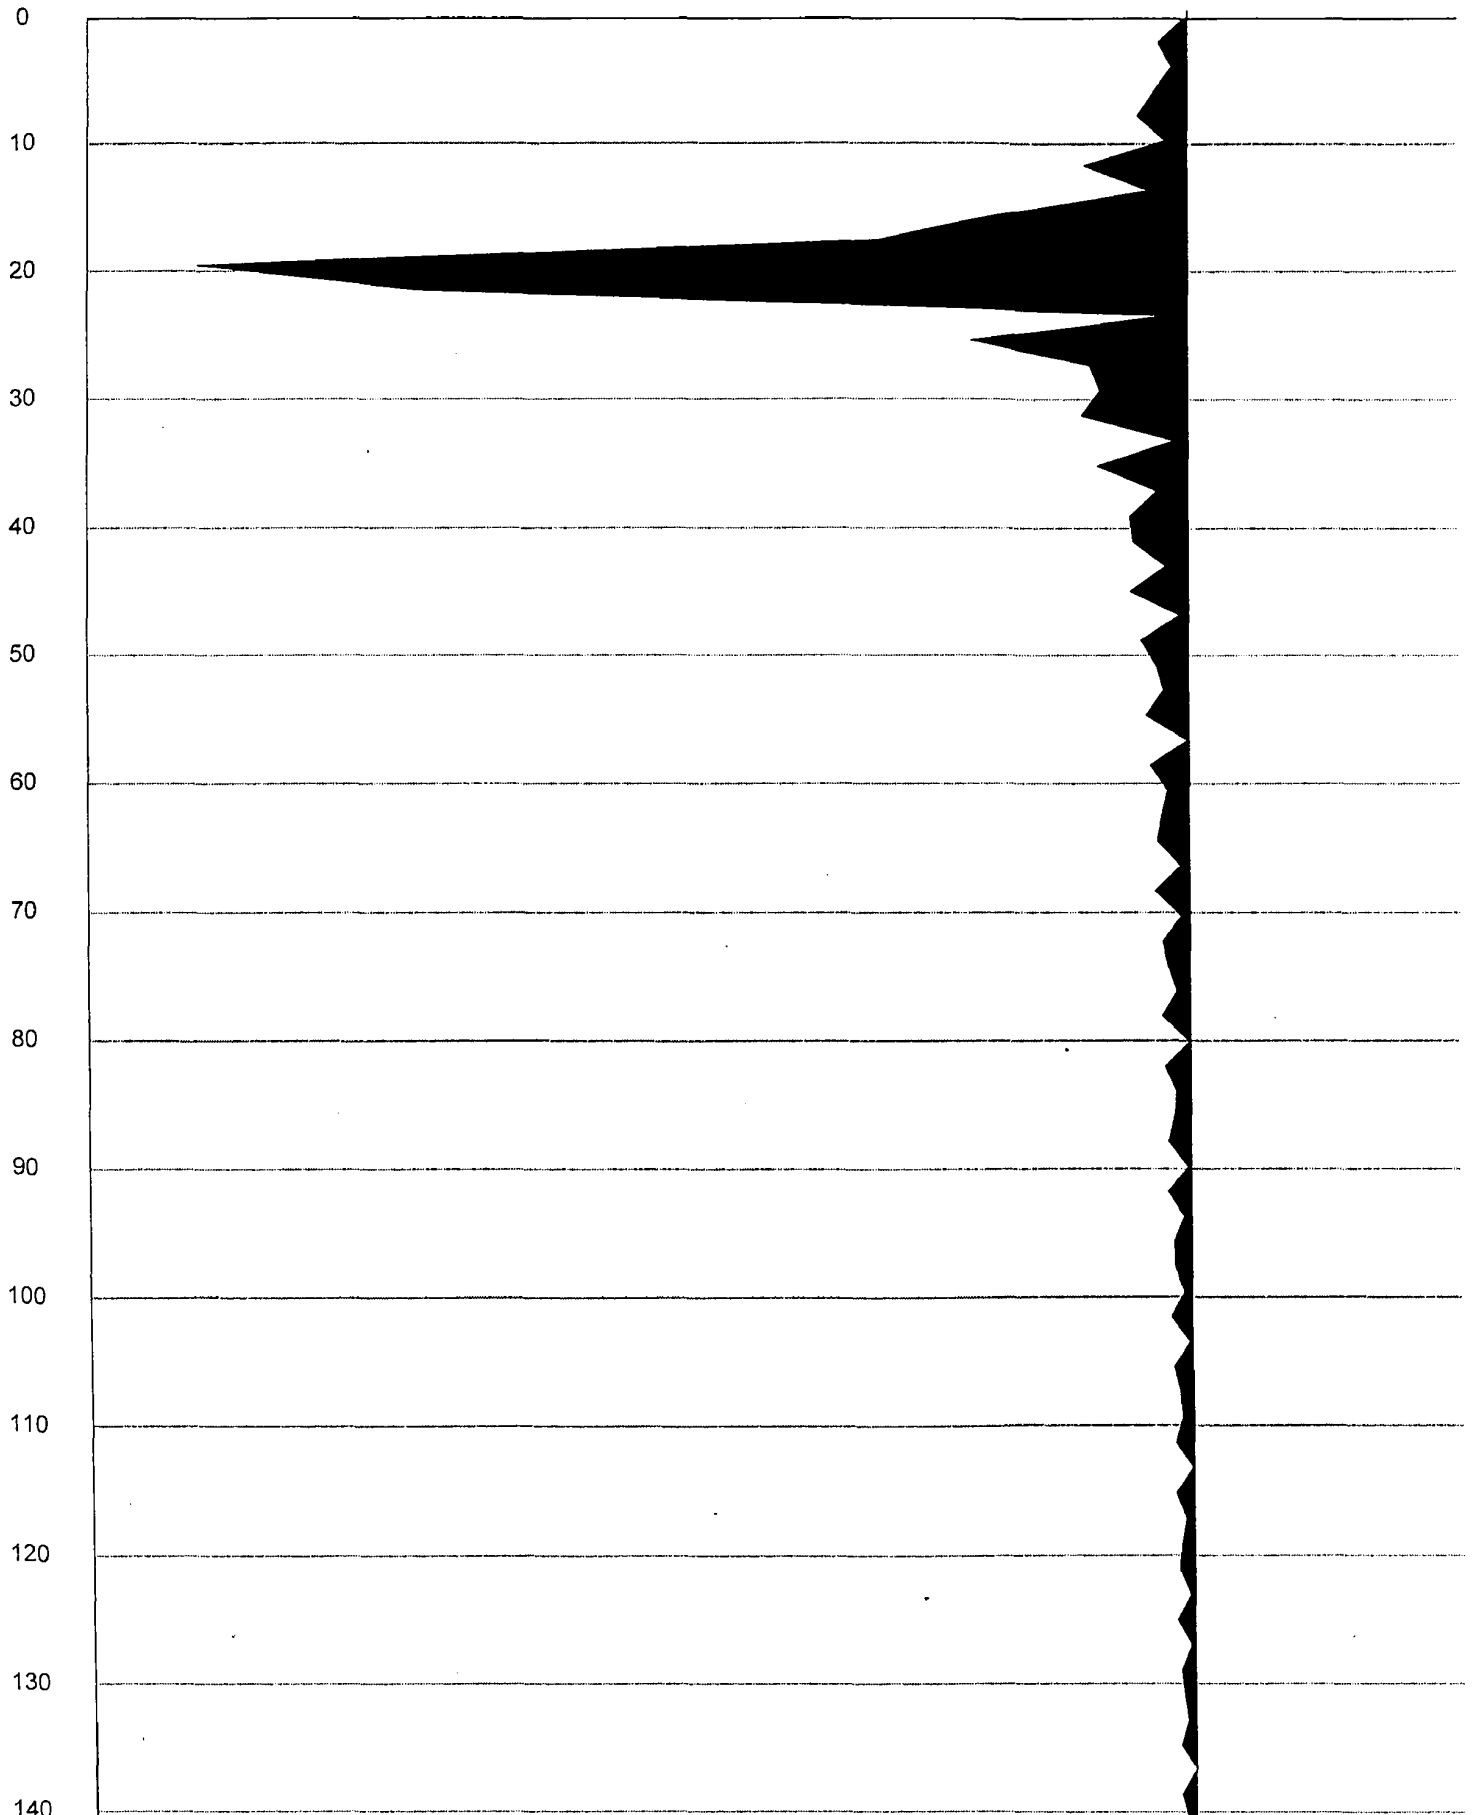


Geometrics ES-3000 S/N 5138

Frequency (HZ) In: 30.071 Seismograph: 29.3

Date: 1/22/2008


5.0

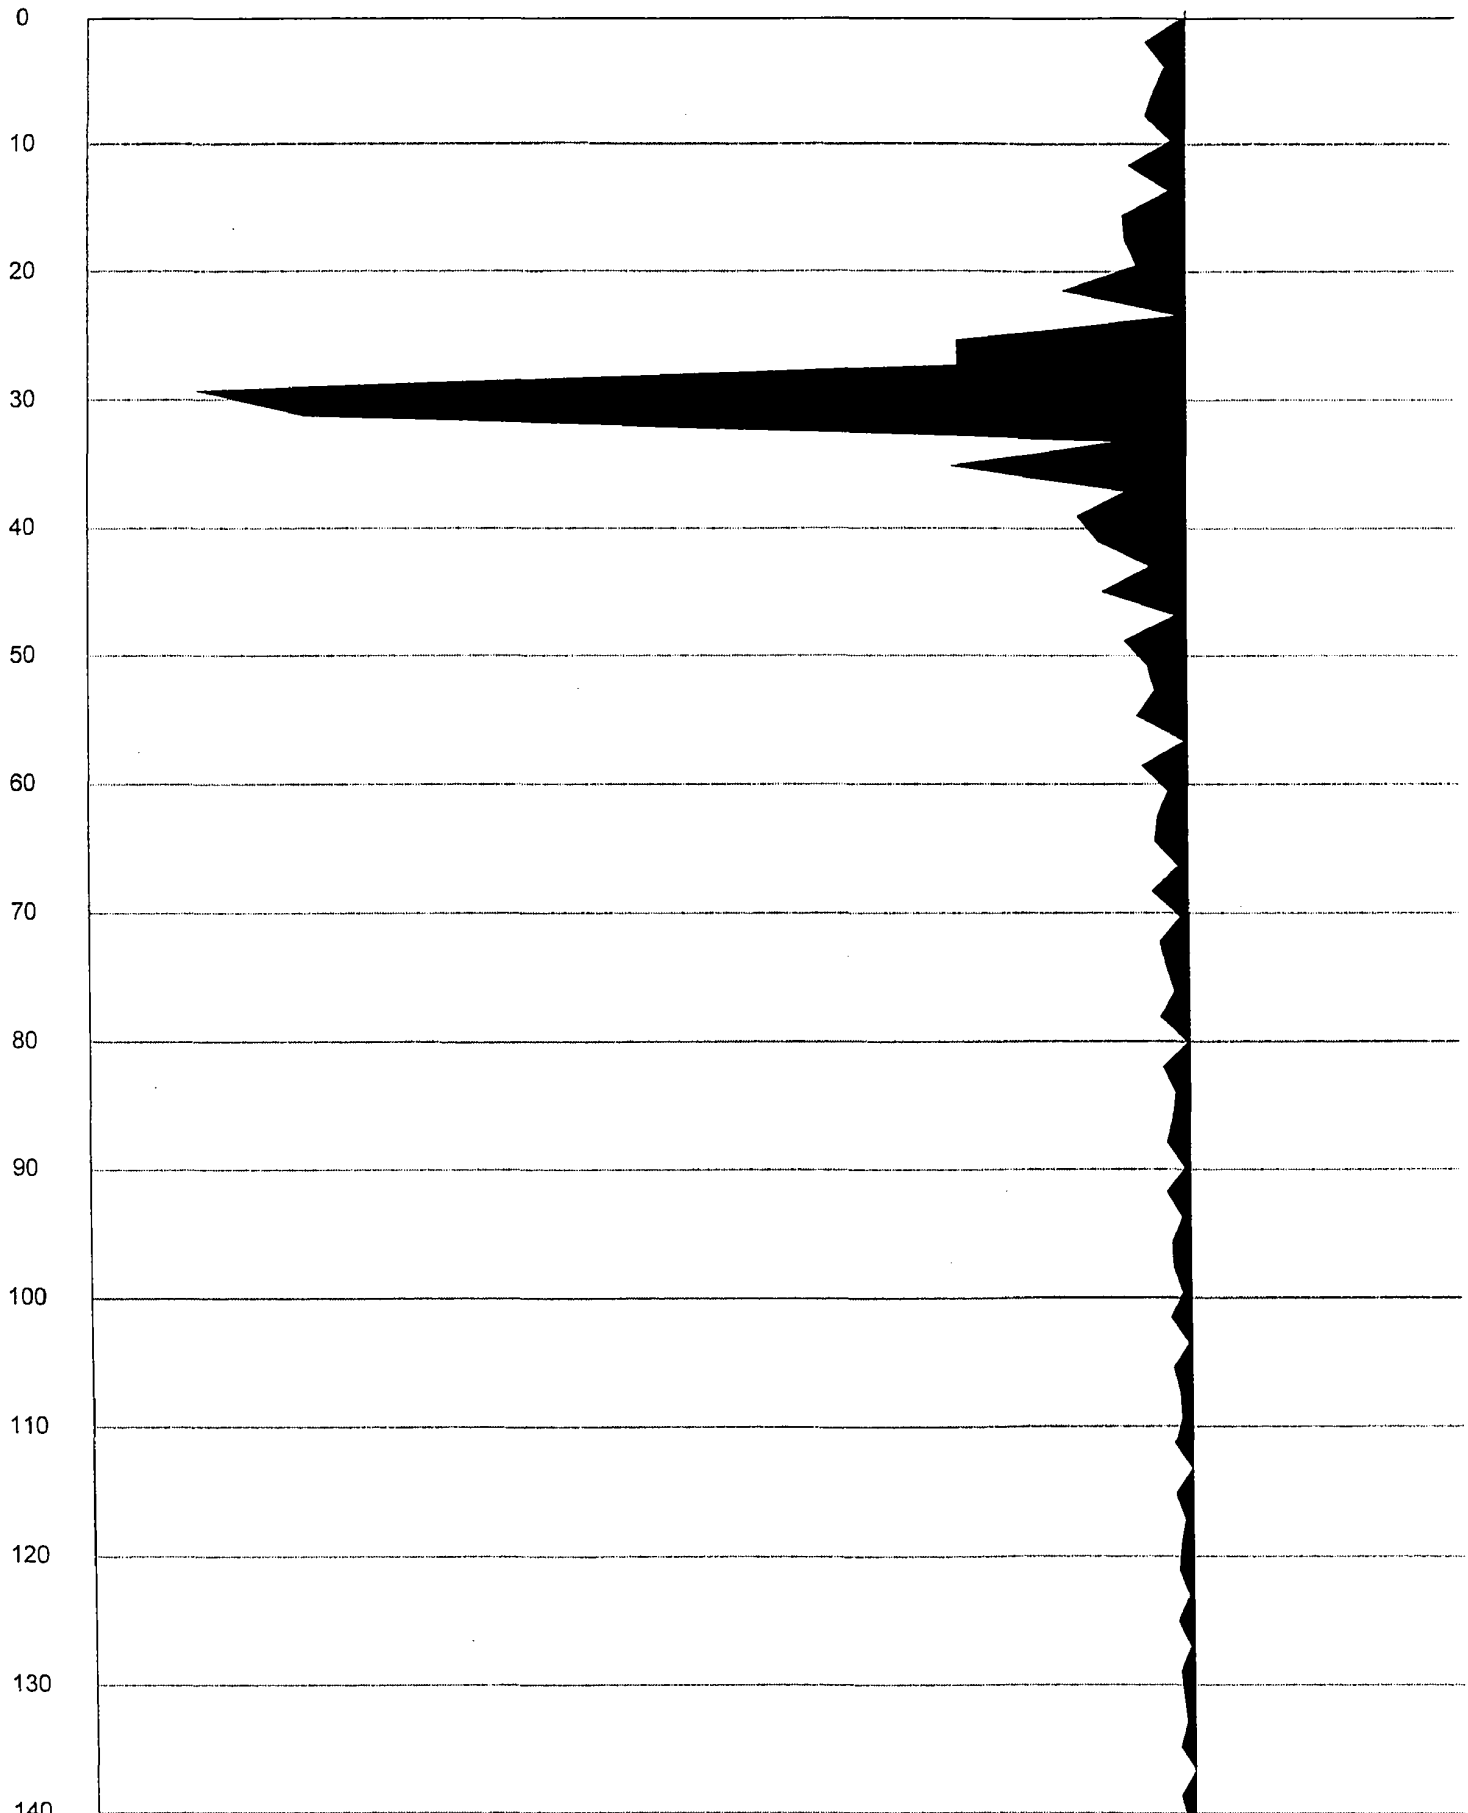


Geometrics ES-3000 S/N 5138


Frequency (HZ) In: 40.040 Seismograph: 40.1

Date: 1/22/2008

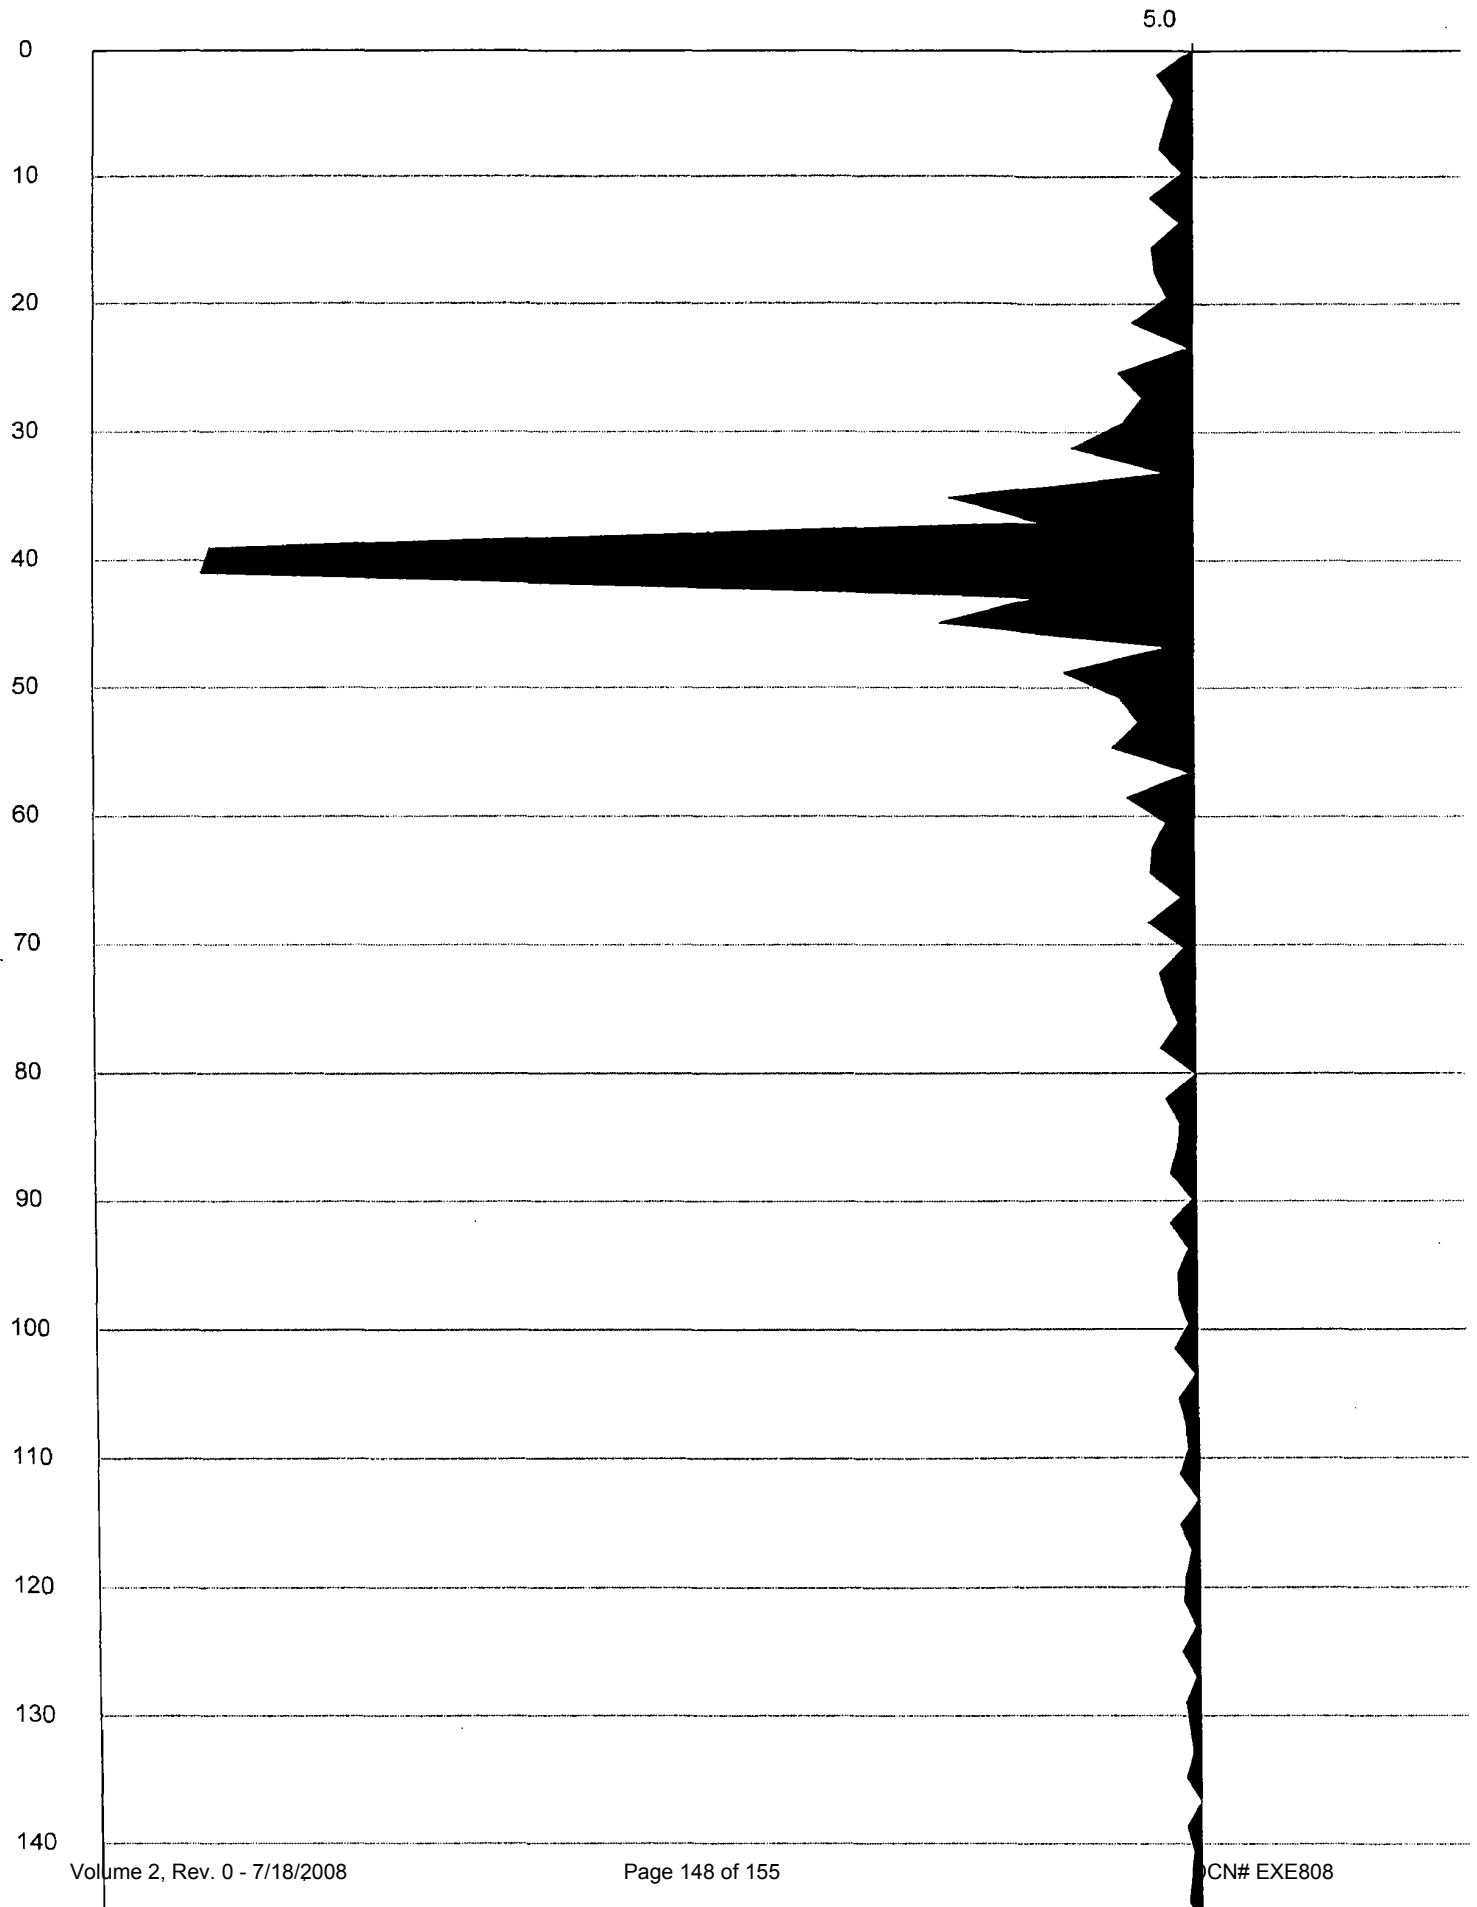



5.0

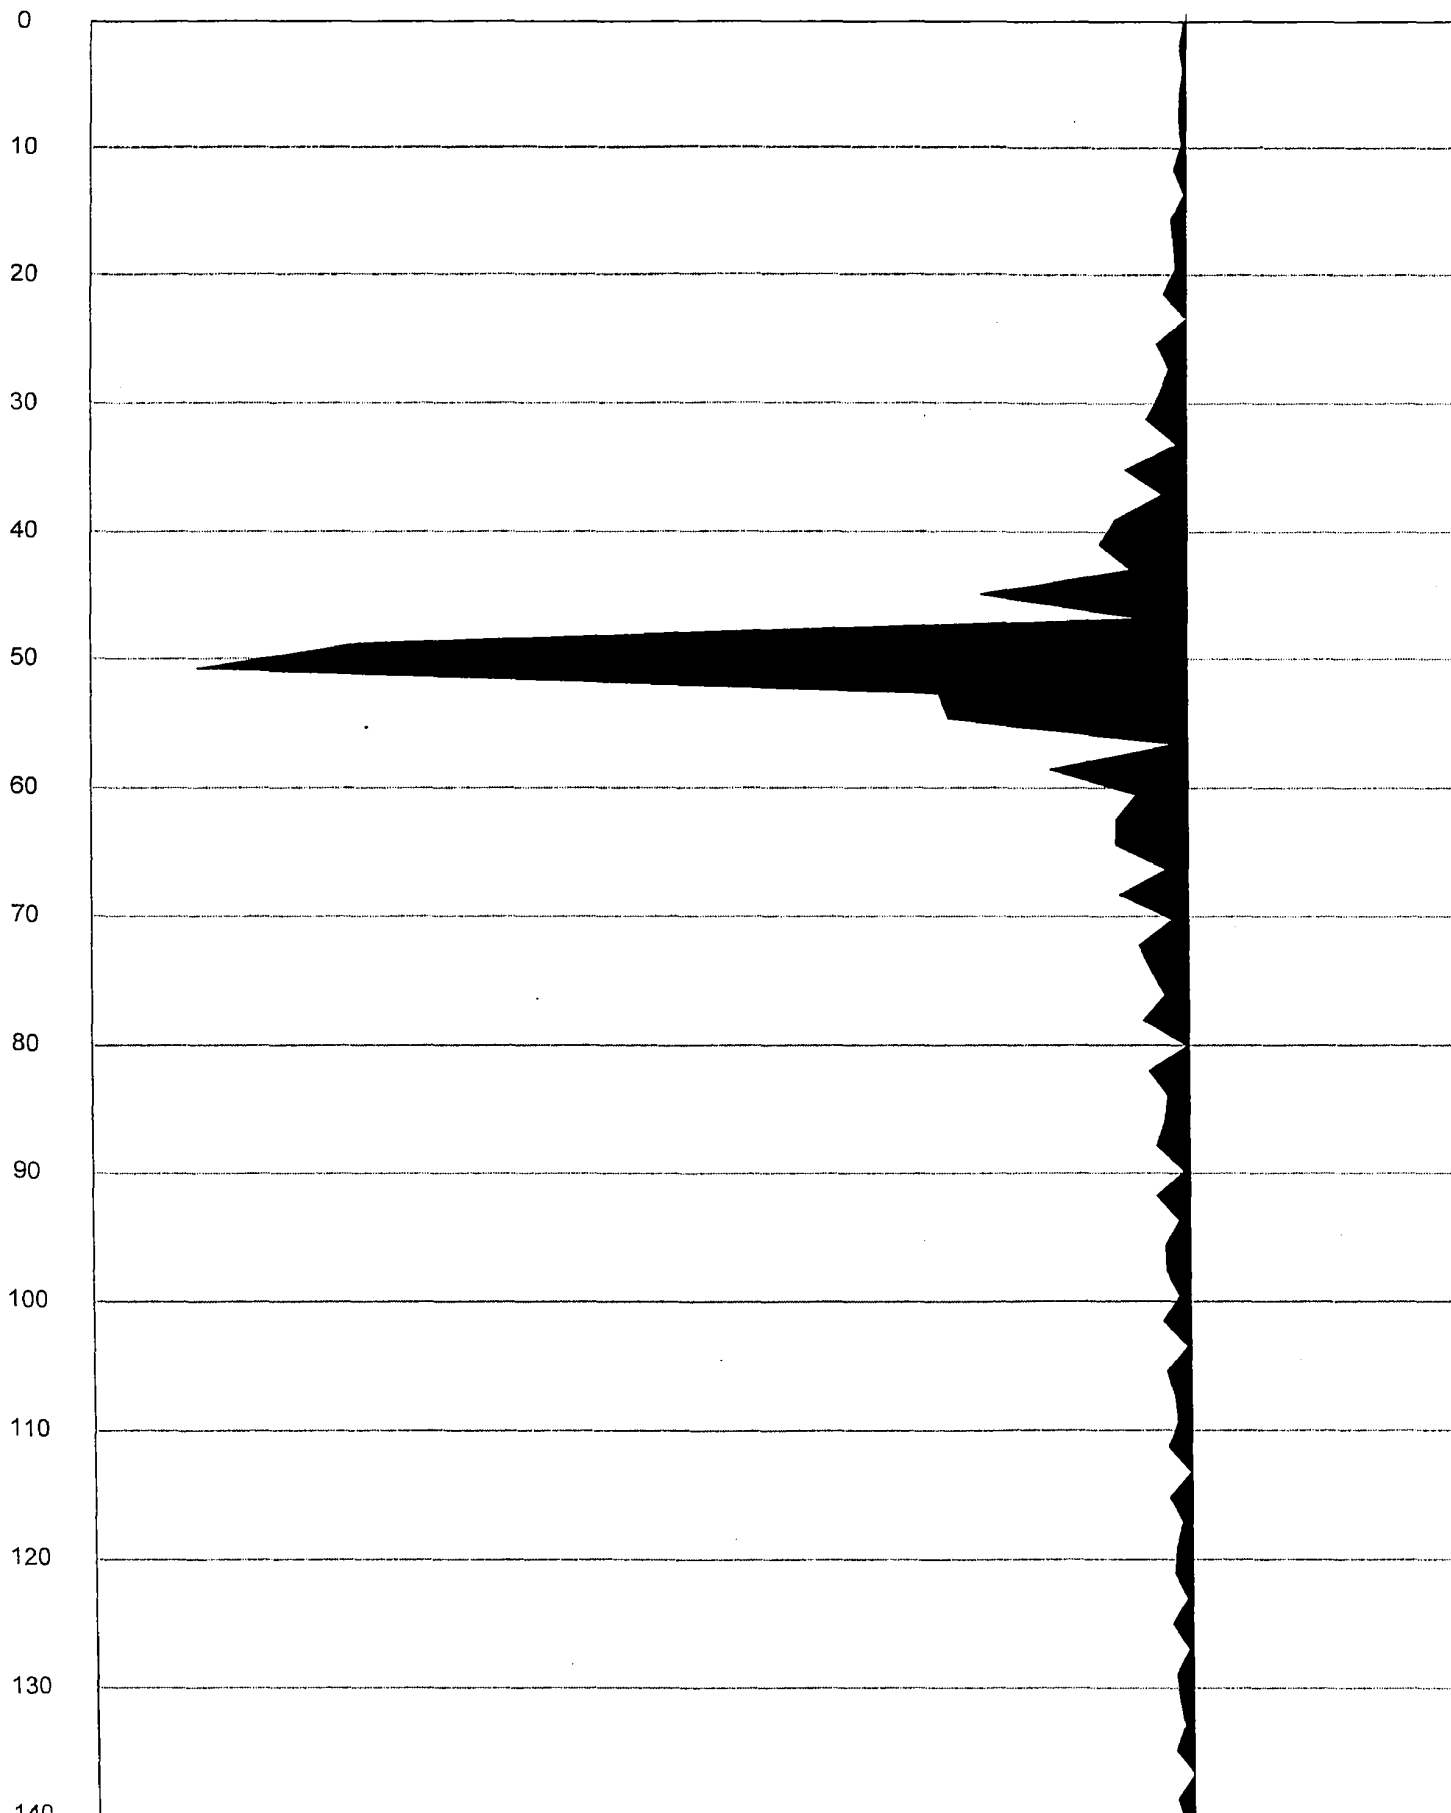


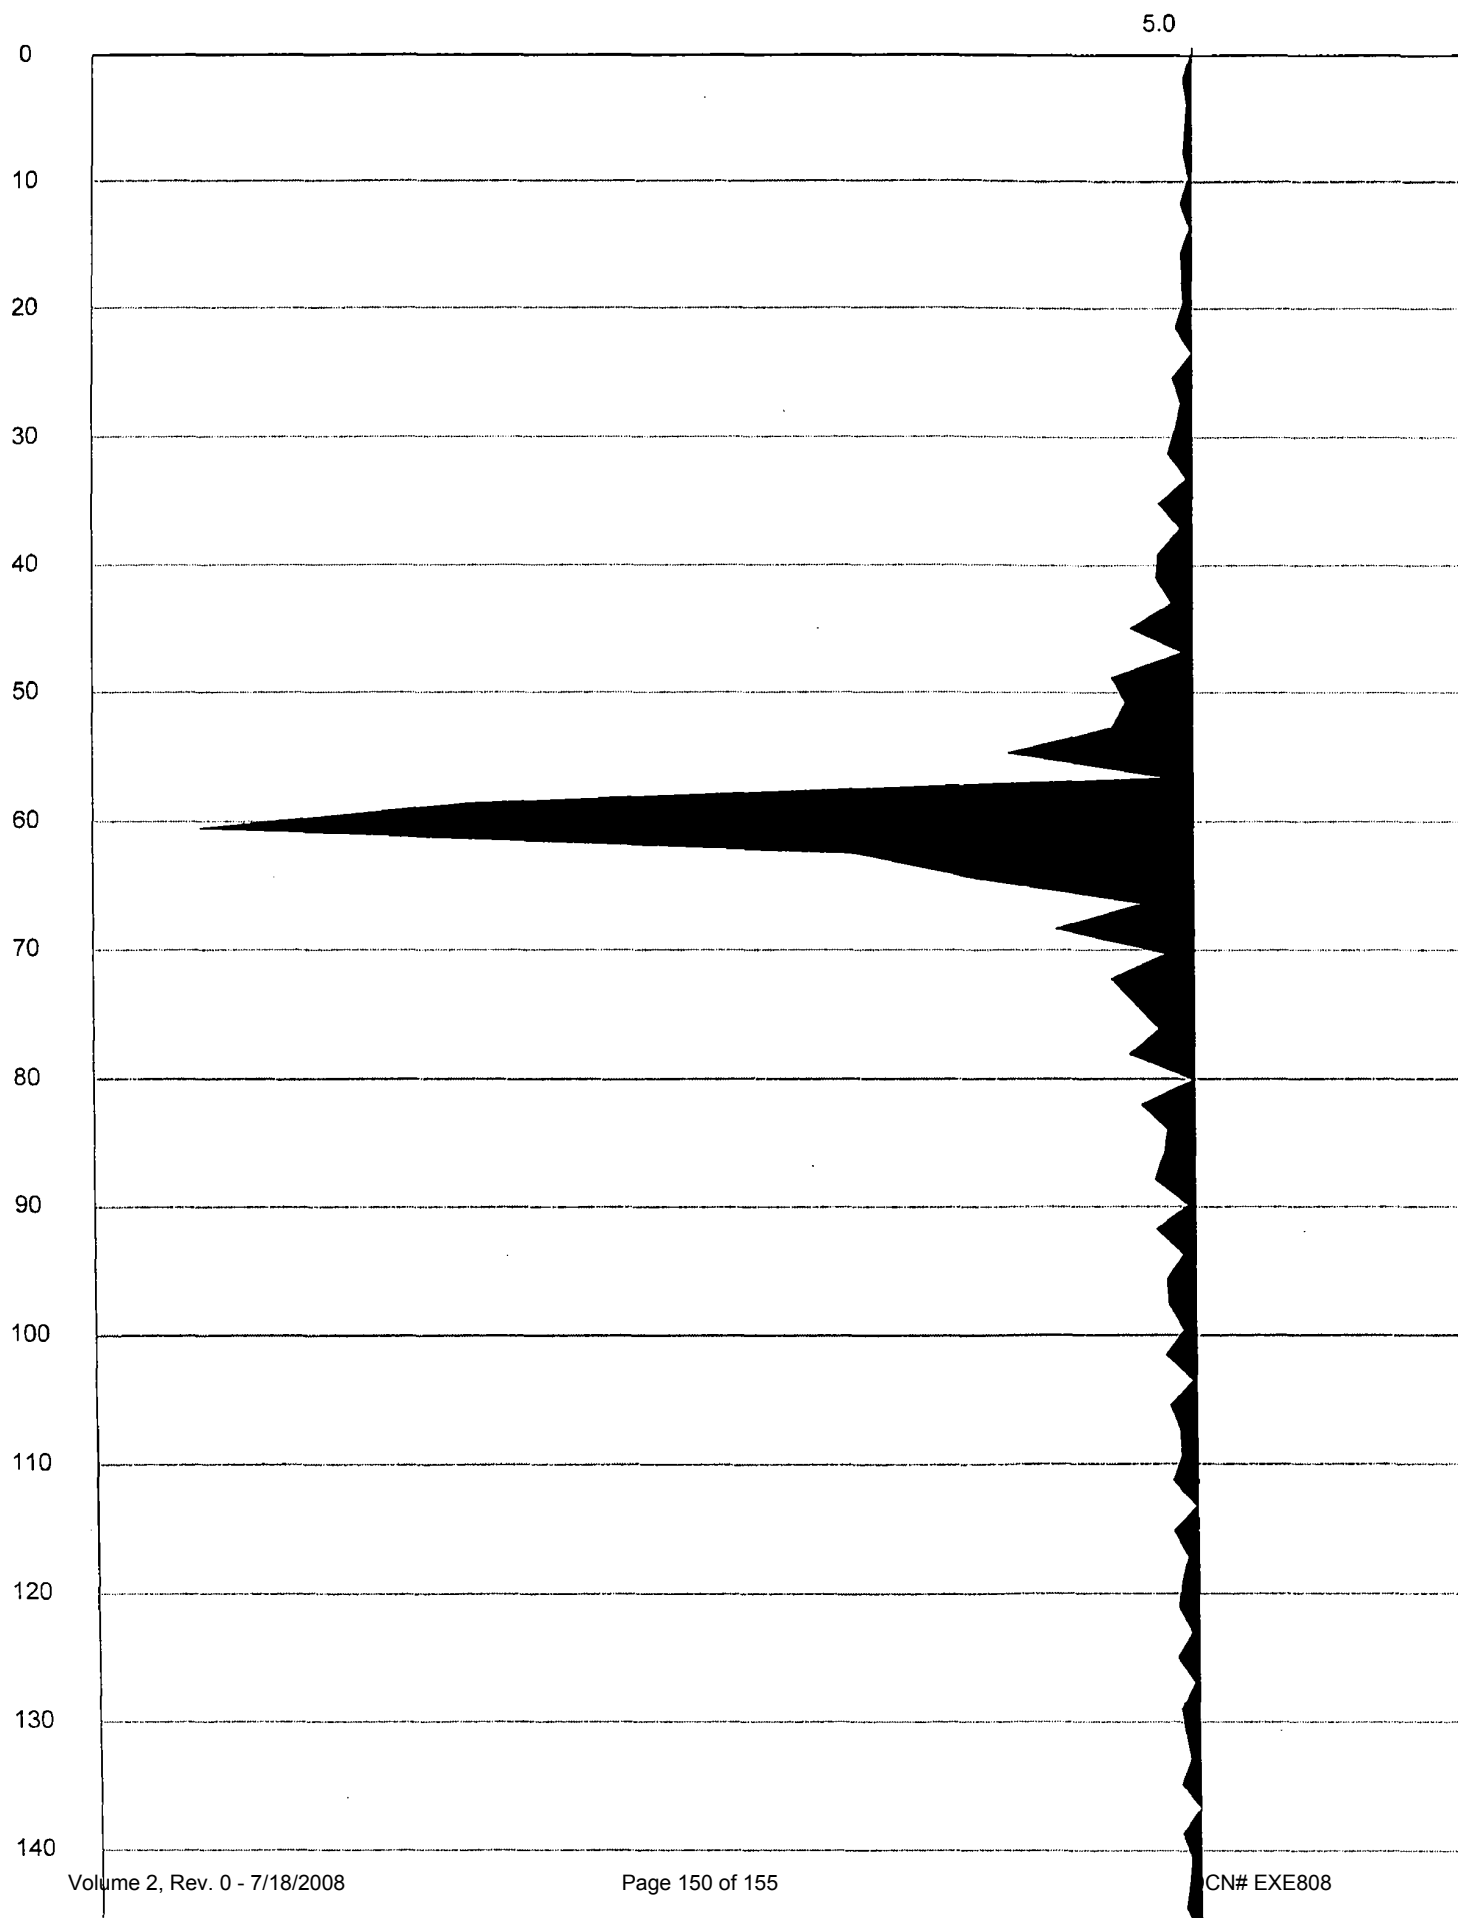




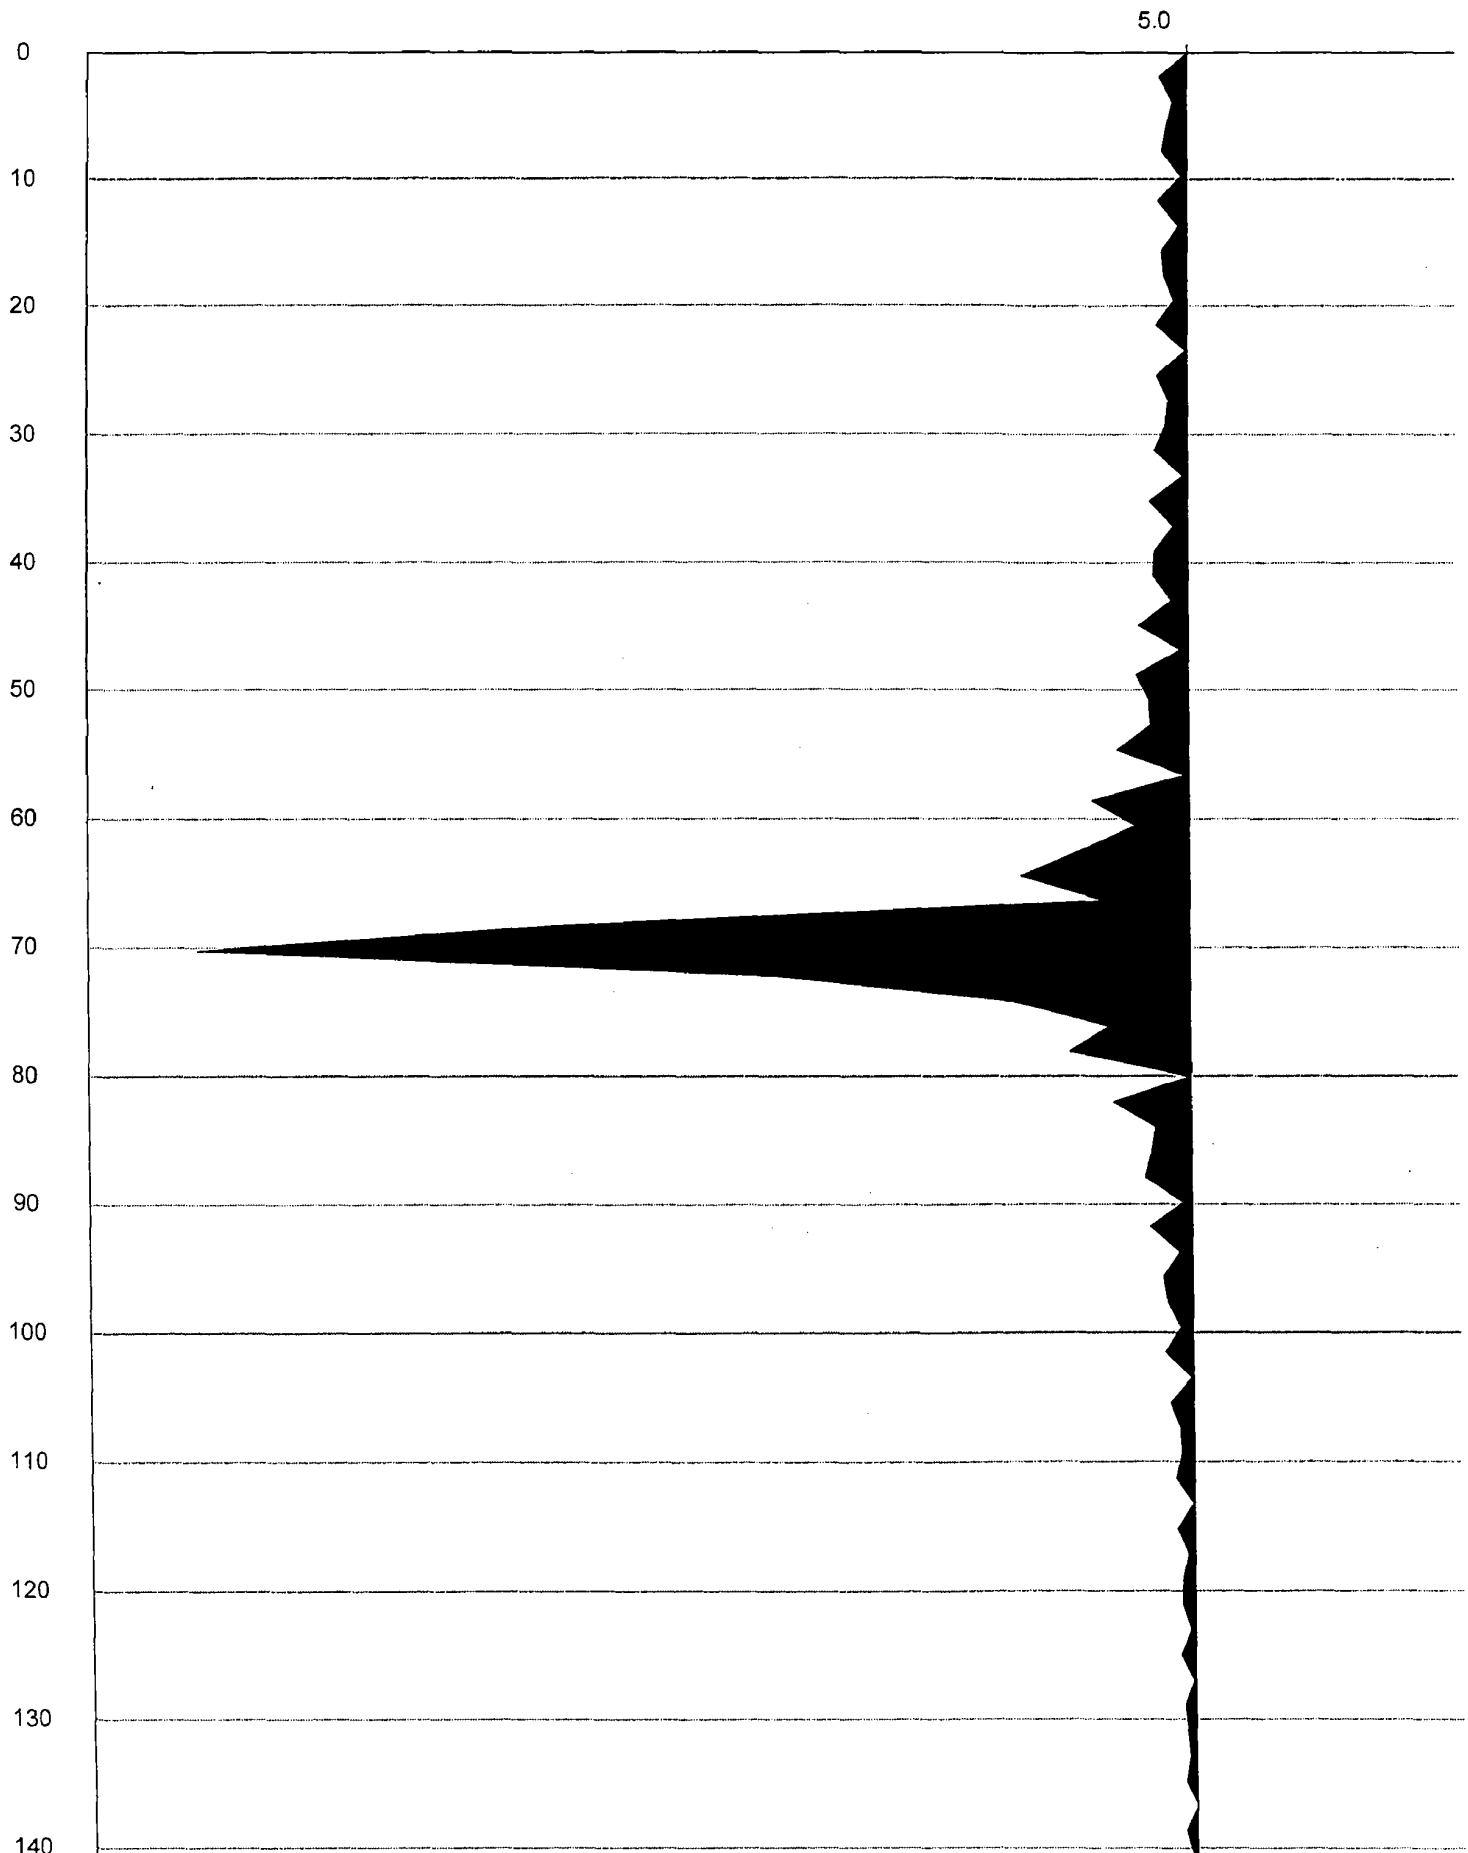

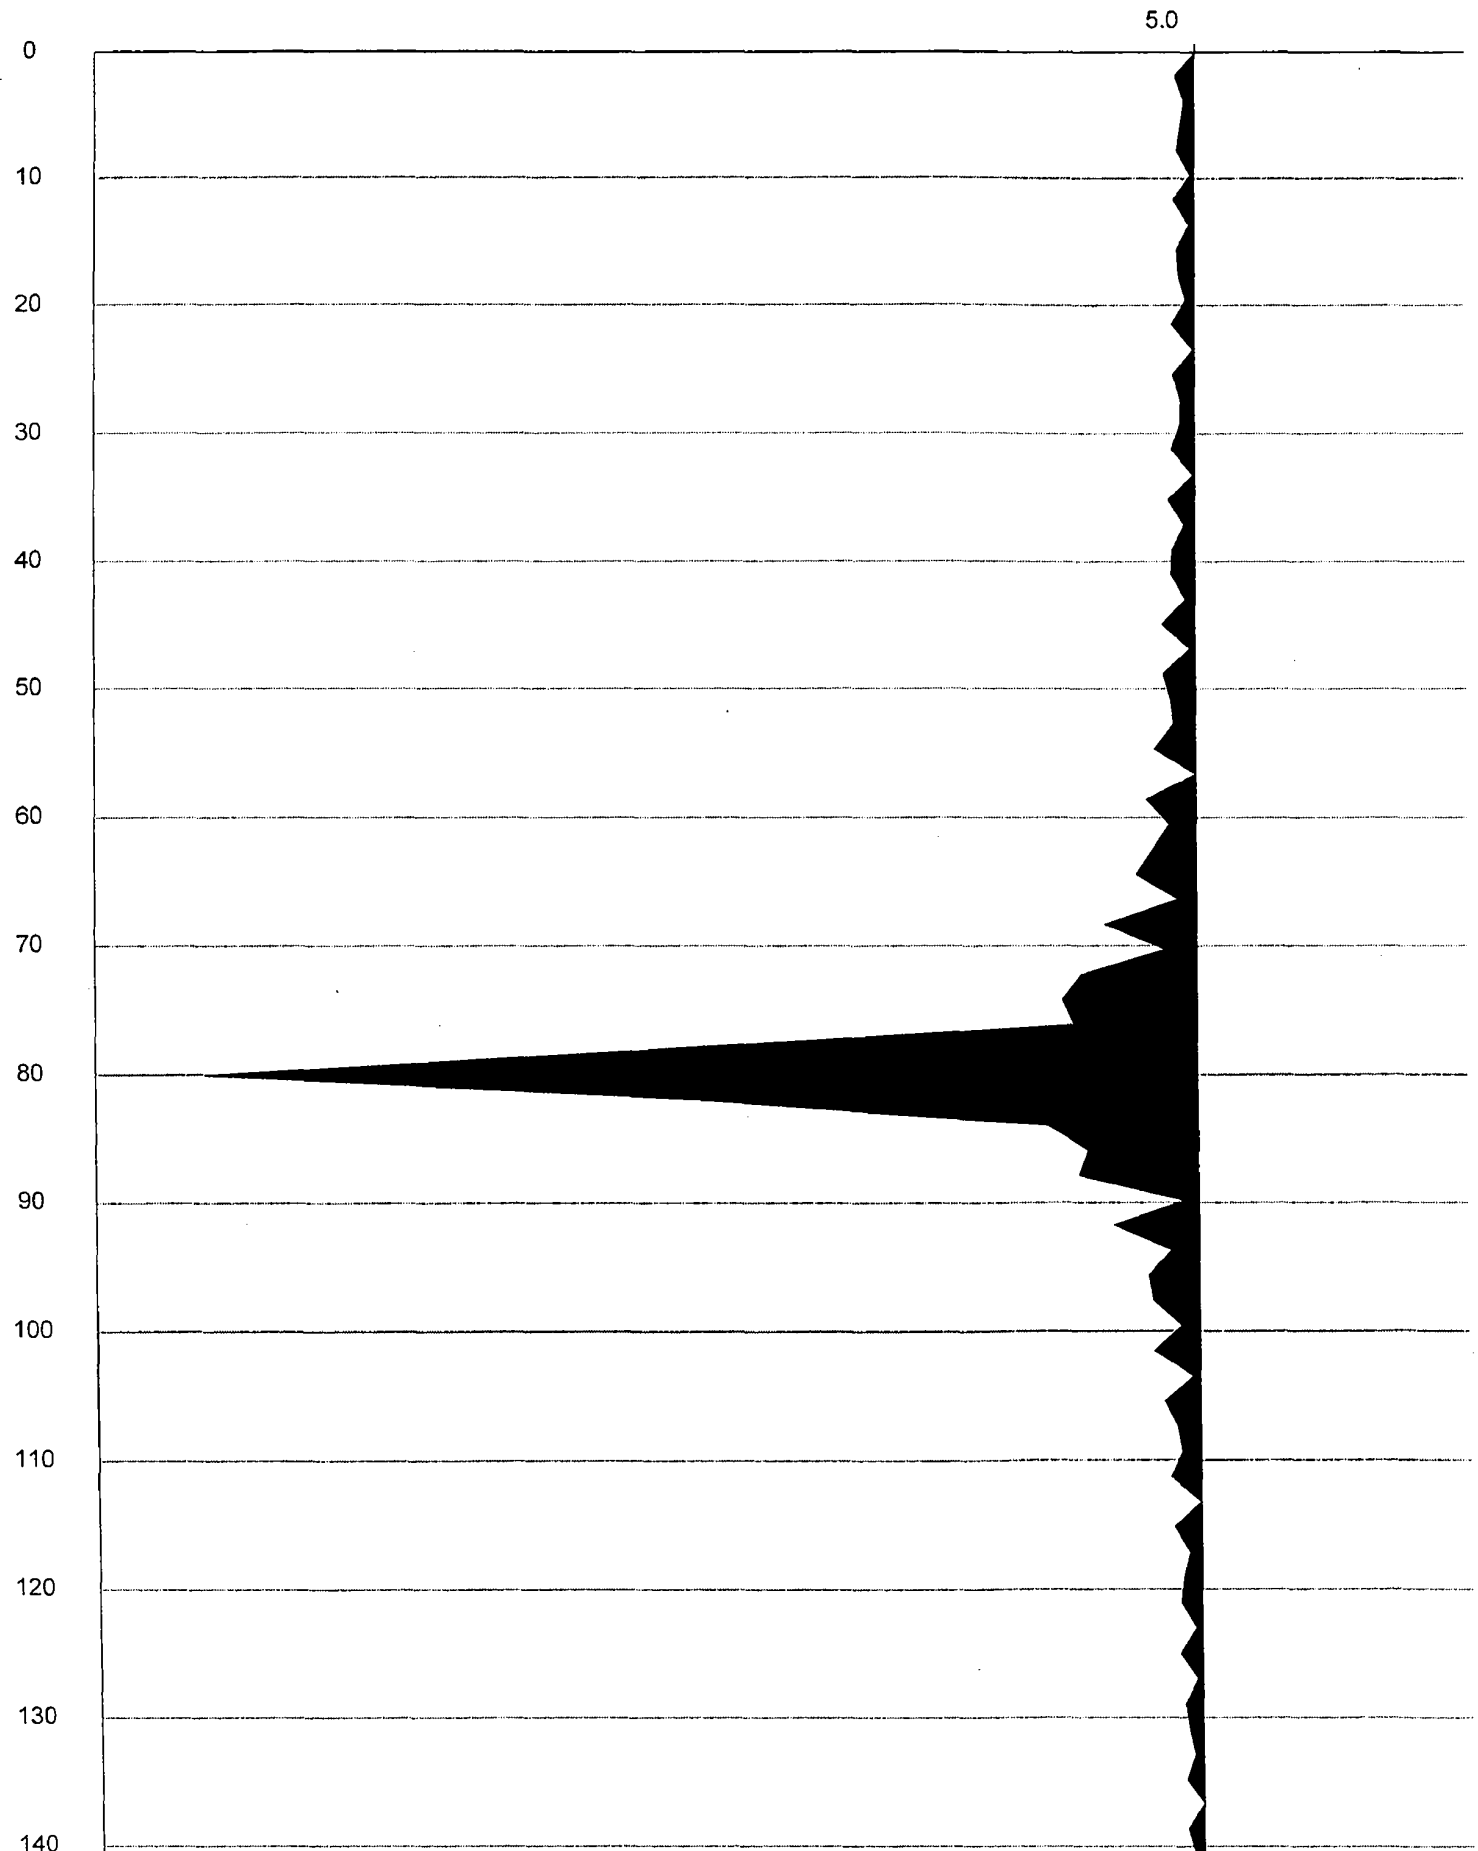

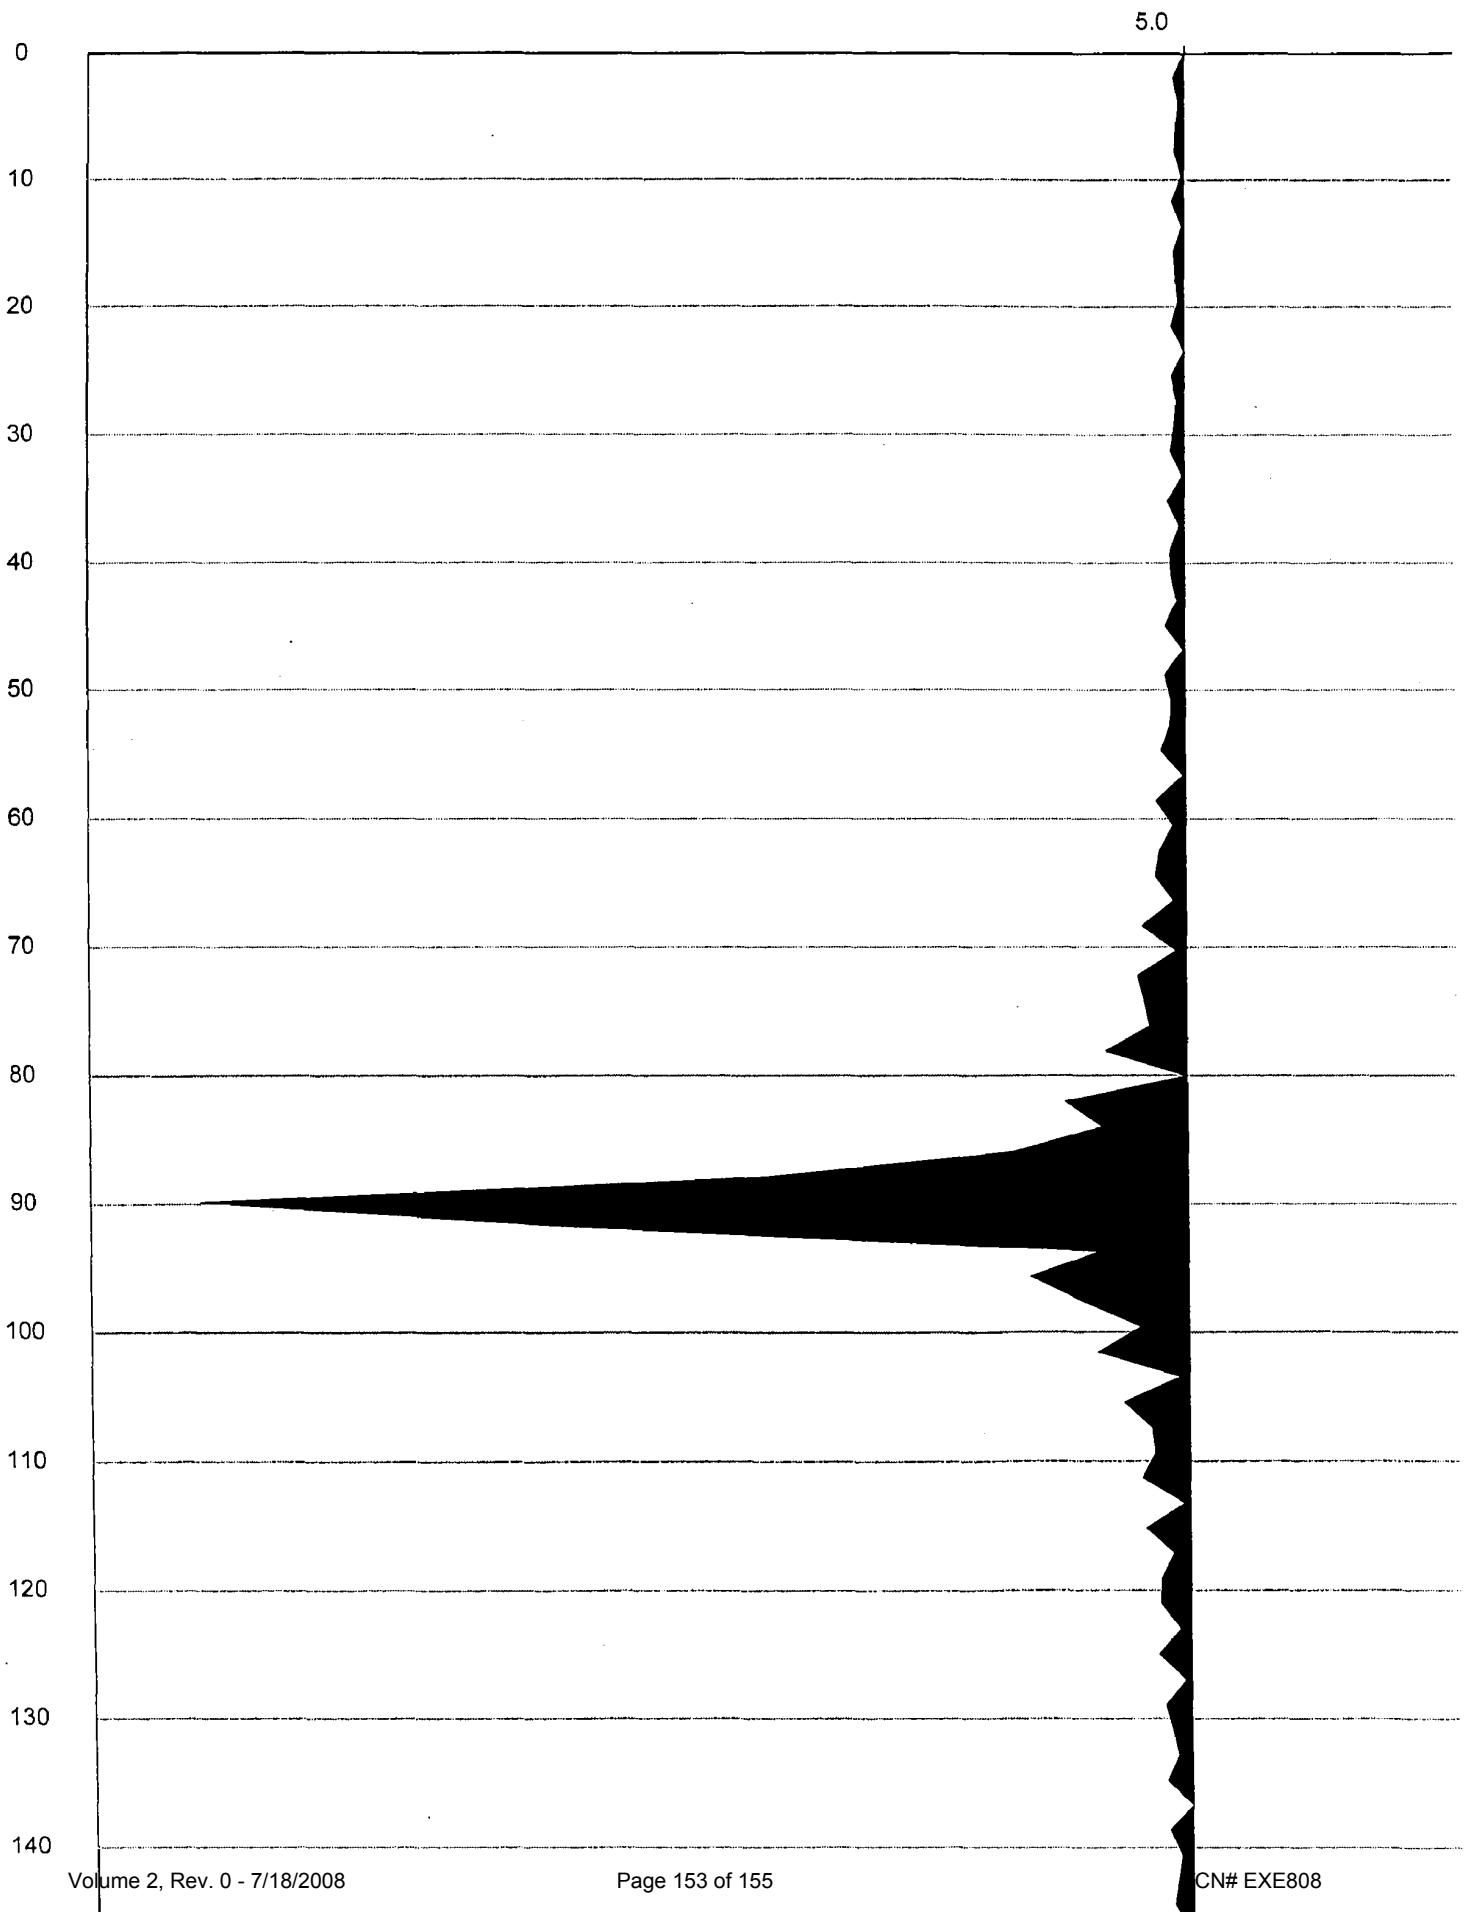

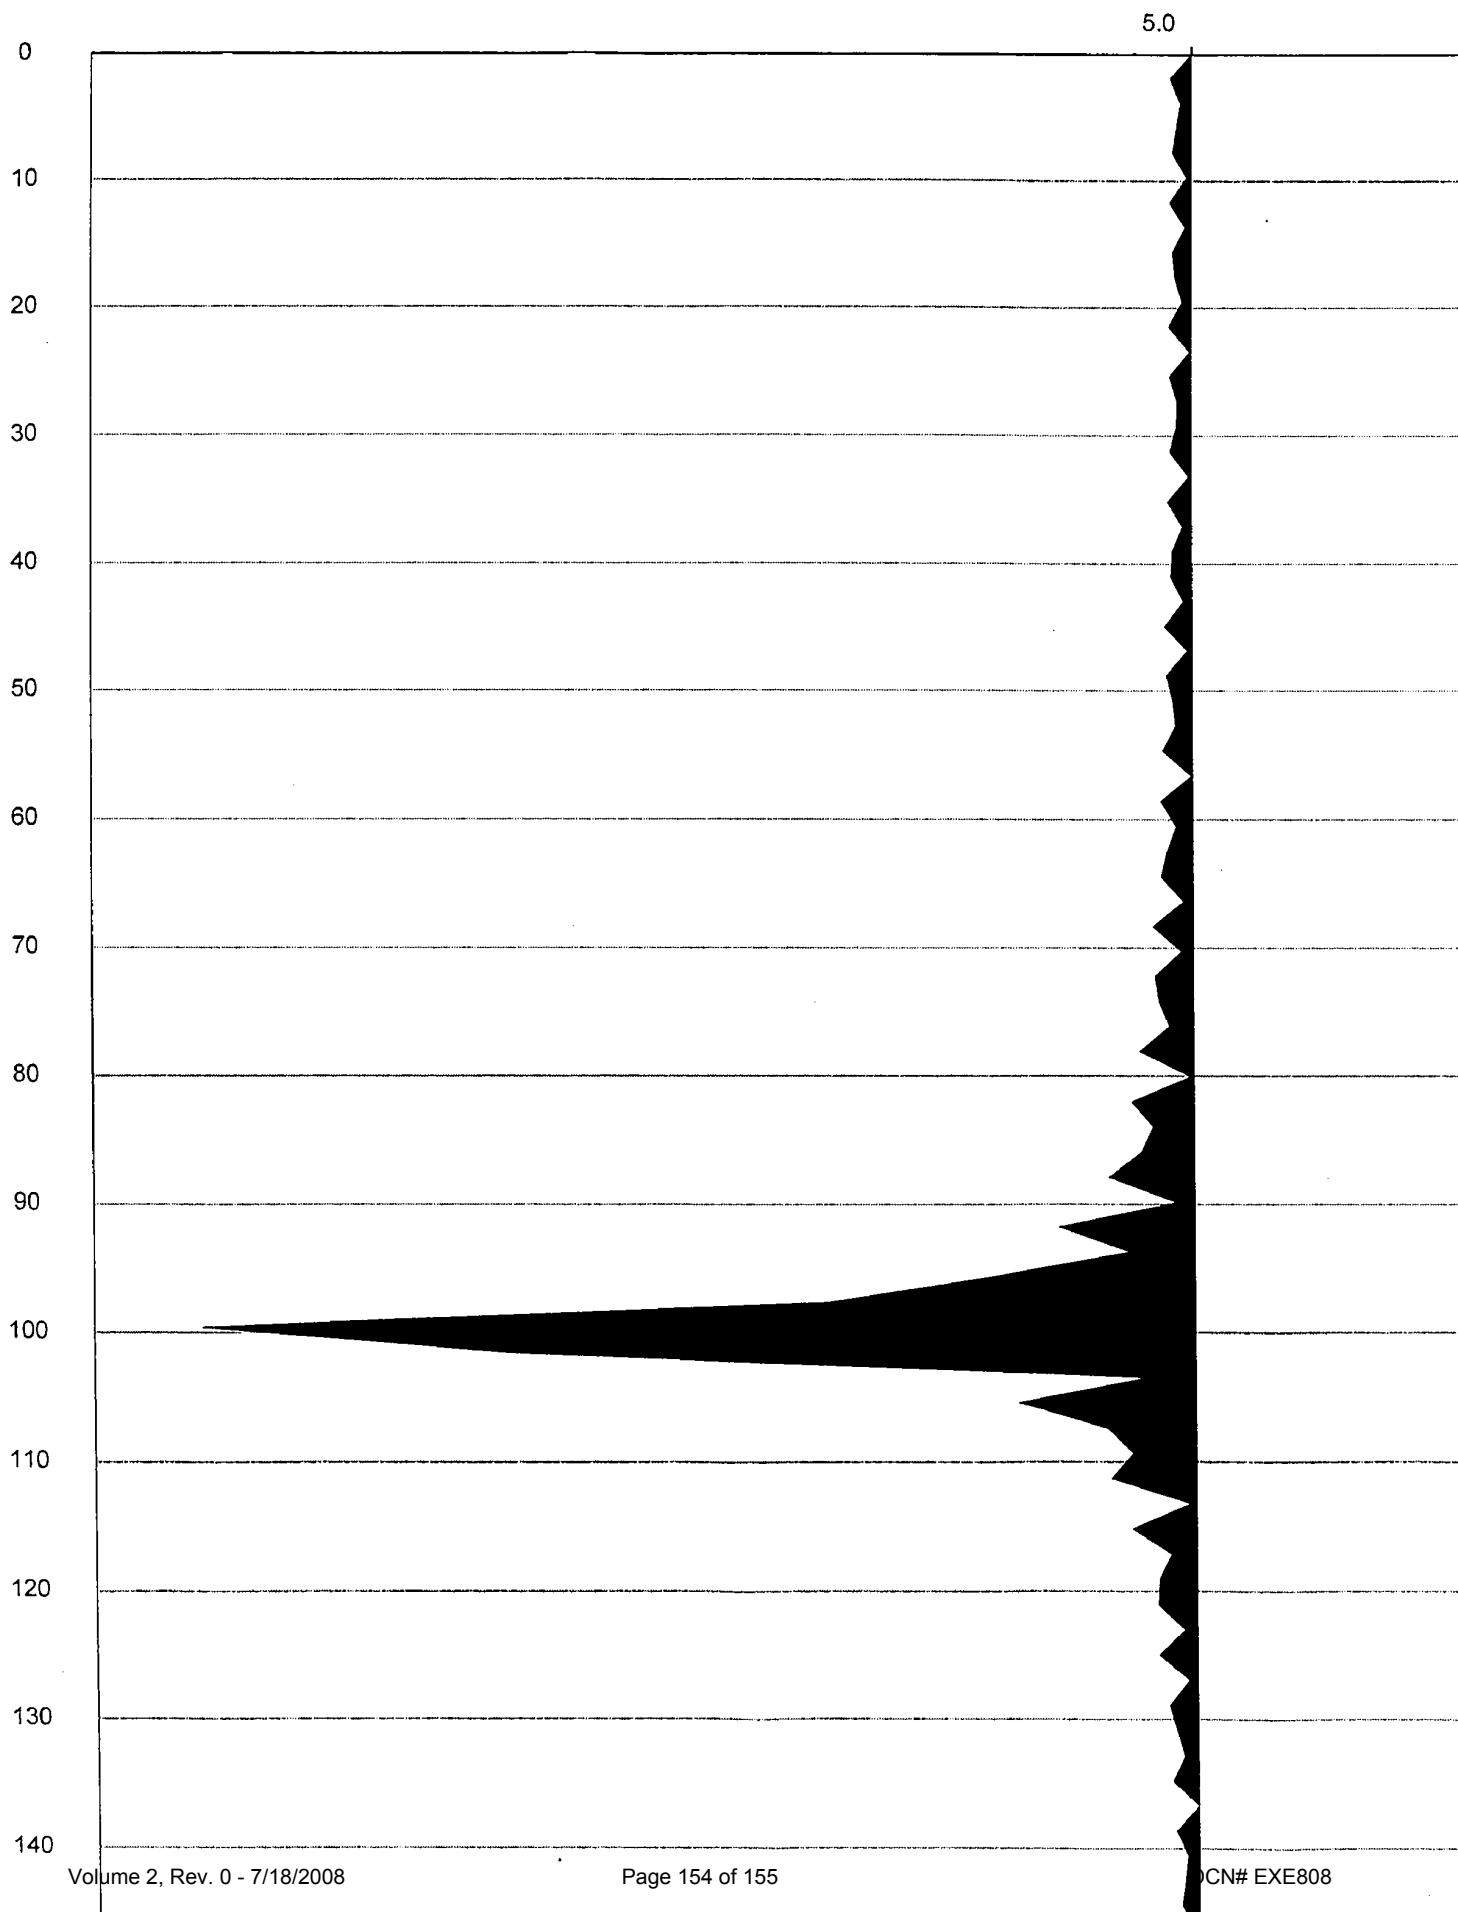

**FINAL DATA REPORT Rev 0  
GEOTECHNICAL EXPLORATION AND TESTING**

**EXELON TEXAS COL PROJECT  
VICTORIA COUNTY, TEXAS  
COOLING BASIN**

**July 18, 2008**

**VOLUME 2  
Appendix D**

**(See Final Data Report Rev 0 of Geotechnical Exploration and Testing  
for Power Block, Appendix D, July 10, 2008)**

**Prepared By:**

**MACTEC Engineering and Consulting, Inc.  
Raleigh, North Carolina**

**MACTEC Project No. 6468-07-1777**

**Prepared For:**

**Bechtel Power Corporation  
Subcontract No. 25352-102-HC4-CY00-00001**