


Rope suspensions with wedge sockets acc. to DIN 43148

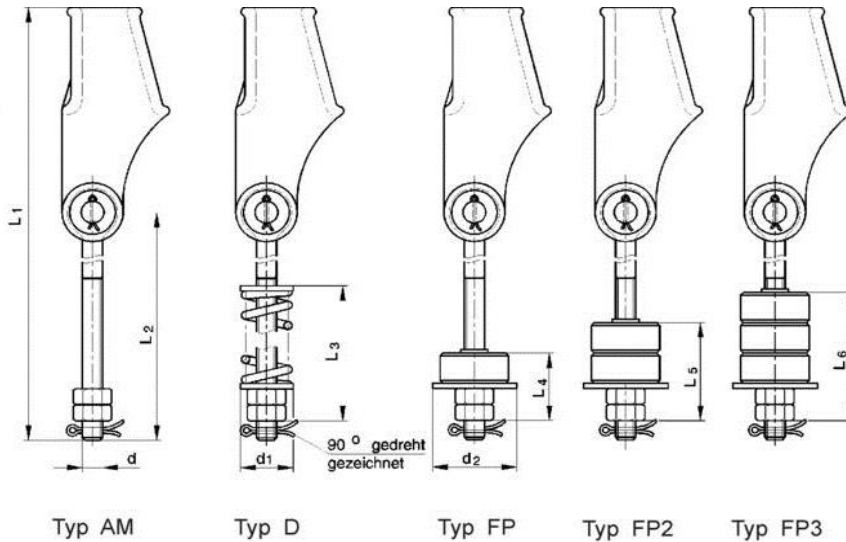

The breaking load of the eye bolt must be aligned with the breaking force of the applied rope.

Size	Rope-Ø	d*	L1	L2	d1	L3	d2	L4	L5	L6
353	6-7	M12	430	300	45	167	50	51	79	107
352	8	M12	430	300	45	167	50	51	79	107
351	9-12	M12	430	300	45	167	50	51	79	107
402	10-12	M16	440	300	46	173	57	59	87	115
401	12-14	M16	440	300	46	173	57	59	87	115
450	12-15	M20	590	400	54	201,5	68	65	93	121
--	16-17***	M27	740	500	65	254	--	--	--	--
--	18***	M27	740	500	65	254	--	--	--	--
--	19-20***	M30	740	500	80	251	--	--	--	--

*Screw head is partly not acc. to DIN 444

**Special lengths for eye bolts are available on request

***Wedge socket in steel casting acc. to DIN EN 13411-6

Size	Rope-Ø	Artikelnummer				
		Type AM	Type D	Type FP	Type FP2	Type FP 3
353	6-7	ZSSSA353M	ZSSSA353D	ZSSSA353F	ZSSSA3532	ZSSSA3533
352	8	ZSSSA352M	ZSSSA352D	ZSSSA352F	ZSSSA3522	ZSSSA3523
351	9-12	ZSSSA351M	ZSSSA351D	ZSSSA351F	ZSSSA3512	ZSSSA3513
402	10-12	ZSSSA402M	ZSSSA402D	ZSSSA402F	ZSSSA4022	ZSSSA4023
401	12-14	ZSSSA401M	ZSSSA401D	ZSSSA401F	ZSSSA4012	ZSSSA4013
450	12-15	ZSSSA450M	ZSSSA450D	ZSSSA450F	ZSSSA4502	ZSSSA4503