

Ancrages & fixations
Systèmes d'ancrage

Leviat[®]
A CRH COMPANY

Halfen HTA-CE



Imagine. Model. Make.

Leviat®

A CRH COMPANY

Nous imaginons, modélisons et fabriquons des produits techniques et des solutions de construction innovantes qui transforment les visions architecturales en réalité et permettent à nos partenaires de la construction de bâtir mieux, plus sûr, plus solide et plus vite.

Leviat est un leader mondial dans le domaine des technologies de connexion, de fixation, de levage et d'ancrage.

Qu'il s'agisse de la construction de nouvelles écoles, d'hôpitaux, de maisons et d'infrastructures ou de la restauration et de l'entretien de structures patrimoniales, nos compétences en matière d'ingénierie font la différence dans le monde entier.

Nous fournissons une assistance technique à chaque étape d'un projet, de la planification initiale à l'installation et au-delà.

Nos services de support technique vont de la simple sélection de produits à l'élaboration d'une solution de conception entièrement personnalisée et spécifique à un projet.

Chaque promesse que nous faisons localement est soutenue par l'engagement et le dévouement de notre équipe mondiale. Nous employons près de 3 000 personnes sur 60 sites en Amérique du Nord, en Europe et en Asie-Pacifique, offrant un service souple et réactif dans le monde entier.


Leviat, une société de CRH, fait partie du leader mondial des matériaux de construction.



>3 000
personnes

60+
sites

~20
pays




Ancrages & fixations

Systèmes de fixation d'accessoires secondaires au béton, y compris les rails d'ancrage, les boulons et les inserts ; également des systèmes de barres de tension pour les toits et les auvents.


- Rails inserts & boulons tête marteau & accessoires
- Douilles filetées
- Systèmes d'haubanage
- Points de fixation
- Systèmes d'ancrage installés ultérieurement

Autres domaines de compétences




Liaisons structurelles

Systèmes permettant de réaliser des connexions robustes et efficaces, ainsi que la continuité de l'armature en béton si nécessaire, entre les murs, les dalles, les colonnes, les poutres et les balcons, afin d'assurer l'intégrité structurelle et d'améliorer les performances thermiques et acoustiques.



Levage & contreventement

Systèmes pour le transport sûr et efficace, le levage et le contreventement temporaire d'éléments en béton coulé et de panneaux basculants avant que les connexions structurelles permanentes ne soient réalisées.




Supports de façade & attaches de retenue

Systèmes pour la fixation sûre et thermiquement efficace de l'enveloppe extérieure du bâtiment, y compris la brique et la pierre naturelle, les panneaux sandwich isolés, les murs-rideaux et les façades en béton suspendues, ainsi que la réparation et le renforcement des installations de maçonnerie existantes.



Coffrages & accessoires de chantier

Accessoires non structurels qui complètent nos solutions techniques et contribuent à assurer la sécurité et l'efficacité de votre environnement de construction, y compris les moules pour le coulage d'éléments en béton standard et spéciaux et les éléments essentiels à la construction tels que les entretoises pour barres d'armature.




Technique industrielle

Caniveaux de montage, colliers de serrage et autres systèmes d'encadrement polyvalents qui assurent une fixation sûre dans un large éventail d'applications industrielles.

Sites de production

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

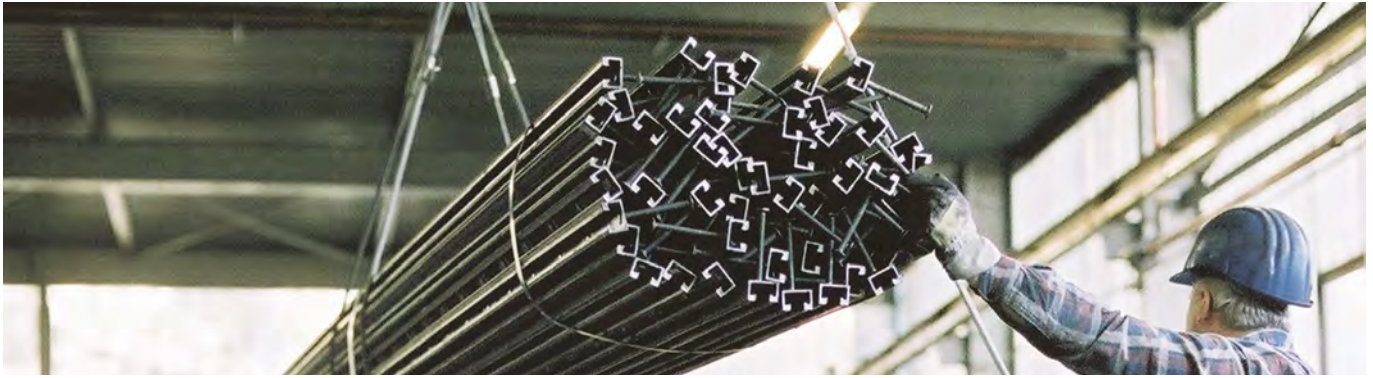







HALFEN CAST-IN CHANNELS

Content

| | | |
|--|---------------|--|
| Better safe than sorry – The right channel for each application | 6–7 | |
| 1 General Information | 8 – 11 | |
| Sustainability, Quality, BIM | 8 | |
| Materials | 9 | |
| Corrosion protection | 10 | |
| Channel marking, identification | 11 | |
| 2 Dimensioning | 12–15 | |
| Verification method | 12 | |
| Calculation basics, Verification flow chart | 13 | |
| HTA-CE/HZA Software | 14-15 | |
| Tender text example | 15 | |
| 3 HALFEN HTA-CE Cast-in Channels | 16–26 | |
| The benefits at a glance | 16 | |
| Application examples | 17 | |
| Product range – overview channels and bolts | 18–19 | |
| HALFEN Bolts type HS | 20–23 | |
| HALFEN Bolts type HSR | 24 | |
| Dynamic loads, edge and bolt spacing HTA-CE standard lengths, HTA-CS Channels “curved solution” | 25 26 | |
| 4 HALFEN HZA Cast-in Channels, serrated | 27–33 | |
| The benefits at a glance | 27 | |
| Application examples | 28 | |
| Product range – Overview channels and bolts | 29 | |
| HZA standard lengths, HZA-CS Channels “curved solution” | 30 | |
| HALFEN HZS Bolts | 31–32 | |
| Edge and bolt spacings | 33 | |
| 5 HTA-CE/HZA Installation | 34–37 | |
| Installation aids and further channel parts | 34 | |
| Installation in pre-stressed concrete | 35 | |
| Channel installation to formwork or concrete | 36 | |
| Installing HALFEN Bolts and attached structures | 37 | |

HALFEN CAST-IN CHANNELS

Content
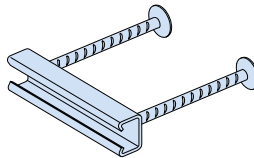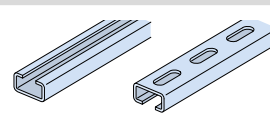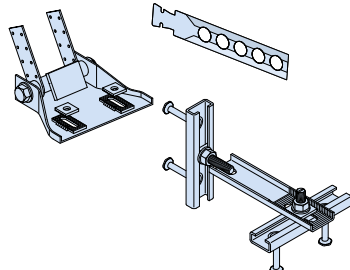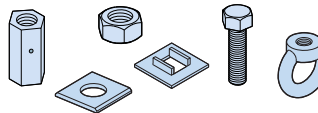
| | | |
|---|--------------|---|
| 6 HALFEN HGB Channels – handrail connection | 38–51 | |
| The benefits at a glance | 38 | |
| Application examples | 39 | |
| Regulations and standards | 40 | |
| Materials, corrosion protection | 41 | |
| Product range, ordering examples | 42 | |
| Installation | 43 | |
| Dimensioning with calculation example | 44–51 |  |
| 7 HALFEN HTU Channels | 52–58 | |
| HALFEN HTU-S cast-in channel for fixing Profiled Sheet Metal | 52–54 | |
| C-shaped channels with welded anchors | 54–58 |  |
| 8 HALFEN Framing Channels | 59–61 | |
| The benefits at a glance | 59 | |
| Type overview – an extract from the framing channel catalogues | 60–61 |  |
| 9 Roof and wall | 62–74 | |
| The right solution for each application | 62 | |
| Application examples | 63 | |
| HSF Rafter shoe | 64 | |
| HNA Timber fixing strip | 65 | |
| Brick tie anchor systems ML + BL | 66–68 | |
| HALFEN Anchor bolt systems | 69 | |
| Restraint ties | 70–72 | |
| HVL Precast connection | 73 | |
| HKW Corner guard | 74 |  |
| 10 HALFEN Curtain Wall System | 75–87 | |
| The benefits at a glance | 75 | |
| Application examples | 76 | |
| General, post and beam facade and modular facade | 77 | |
| Product range | 78–79 | |
| HALFEN Channel HCW 52/34 | 80–81 | |
| HALFEN Cast-in channels with rebar | 82 | |
| Edge of slab anchors HCW-ED | 83 | |
| Dimensioning | 84–85 | |
| Top of slab brackets HCW-B1 and HCW-B2 | 86–87 |  |
| 11 Accessories | 88–91 | |
| The benefits at a glance | 88 | |
| Nuts and washers | 89 | |
| Threaded rods, hexagonal head bolts, coupler sleeves, Ring nuts | 90 | |
| Rail clips | 91 |  |
| Appendix | | |
| Index | 92 | |
| References | 93–94 | |
| Contact, technical support | 95–96 | |

BETTER SAFE THAN SORRY.

The right channel for every application.

Besides excellent adjustability, HALFEN Cast-in channels save considerable installation time. The result, faster construction and therefore cost saving. HALFEN Cast-in channels are the ideal basis for easy to install, adjustable connections. A foam strip filler stops the ingress of concrete into the channel. HALFEN Channels are suitable for various types of construction connections, for example; façades, precast

concrete elements, stadium seating, in civil engineering (fixing of tunnel signals), lift guide-rails, crane runway, pipe fixings under bridges.

HALFEN Fixing systems – The intelligent alternative to drilling and welding.



Features

- › adjustable
- › hot-rolled profile; suitable for dynamic loads
- › can be installed in concrete pressure and tensile-stress zones
- › with European Technical Assessment

Application

- › fixing of all types of building components



Features

- › adjustable, with load transmission in longitudinal channel direction
- › suitable for dynamic loads (applies for hot-rolled and serrated DYNAGRIP® channels)
- › can be installed in concrete pressure and tensile-stress zones
- › with European Technical Assessment

Application

- › fixing of all types of building components



Features

- › as DYNAGRIP® Channels
- › suitable for exceptional load cases caused by earthquake, plane crashes or explosions – for concrete crack widths up to 1.5 mm

Application

- › fixing of all types of building components in safety critical areas with high requirements for extraordinary impacts i.e. in nuclear power stations and similar facilities



Features

- › the special ribbed head anchor provides good load transfer in thin concrete elements

Application

- › fastening railings on the thin front face of balcony slabs

APPLICATION EXAMPLES HALFEN CAST-IN CHANNELS

Areas of Application

CURTAIN WALL



Edificio Gas Natural, Barcelona/Spain

POWER STATIONS



Power station

BRIDGES



Passerelle Simone de Beauvoir, Paris/France

SPORTS



Rheinenergiestadion, Cologne/Germany

LIFTS AND ELEVATORS



Lift fixings, guide-rails

HTU TRAPEZOIDAL SHEET PANELS



UPS Air Hub, Cologne Bonn Airport, Germany

TUNNELS



Lötschberg-Base tunnel, Switzerland

ROOFS AND WALLS




Timber pitched-roof construction

HALFEN CAST-IN CHANNELS

General

BIM

We already have considerable experience as a BIM partner and we successfully completed various projects using the BIM methodology. All Leviat engineers are trained to properly supervise this process. With a combination of wide experience and highly-trained engineers the increasing demand for BIM projects can be efficiently met. Examples of previous projects developed using BIM can be found at www.halfen.com ▷ [Service](#) ▷ [BIM](#) ▷ [BIM references](#).

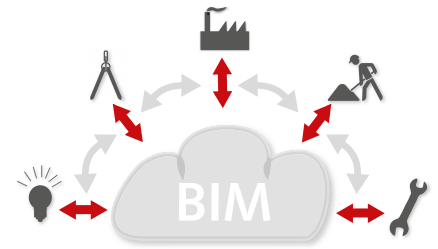

Sustainability

An EPD® (Environmental Product Declaration) provides transparent and comparable ecological data which helps to evaluate the sustainability of a building. Already during the planning phase the data provided here is of great significance for architects and planners. The data provided also helps to ensure the high demands on the environmental performance of the building are met. Health Product Declarations (abbrev. =HPD) complement our information on sustainability. The HPDs include a list of all components and information on the health effects of these components.


The new HPD for hot-dip galvanized HALFEN Cast-in channels helps to achieve additional points in the Leed v4 system.

www.halfen.com ▷ [Brochures](#) ▷ [Product declarations](#).



Fire-resistance / Material fatigue

A wide variety of HALFEN Cast-in channels are tested under fire exposure (according to TR 020 "Evaluation of anchorages in concrete with regard to fire resistance") as well as under cyclic loading. More details, characteristic resistances under fire exposure and fatigue resistances, are provided in the respective European Technical Assessments.



Approvals on the internet

Current valid approvals can be found at:

www.halfen.com ▷ [Brochures](#) ▷ [Approvals](#) ▷ [Fixing systems](#).

Or simply scan the code and select the required document.

Quality

Quality is the outstanding feature of our products. All materials and products are subjected to the most stringent quality control procedures. A quality inspection by the DNV GL* has verified that our quality management system meets the requirements of the ISO 9001:2015 standard.

*merger of DNV (Det Norske Veritas) and GL (Germanischer Lloyd)



Certificate no. 202384-2016-AQ-GER-DAkkS

HALFEN CAST-IN CHANNELS

General - all channels

Hot-dip galvanized FV:

Dipped in a galvanizing bath, with a temperature of approx. 460 °C; this is a method used primarily for open-profile channels.



Zinc galvanized GV:

HALFEN T-bolts are hot-dip galvanized or electrogalvanized with special coating. Both methods provide highest corrosion protection, all passivation processes are Cr(VI)-free."



HALFEN Cast-in channels, steel, hot-dip galvanized

| | Steel | | |
|-----------------|----------|----------------------|-------------|
| | Material | Standard | Zinc coat |
| Channel profile | 1.0038 | EN 10 025-2 ① | FV: ≥ 55 µm |
| | 1.0044 | EN 10 025-2 ① | FV: ≥ 55 µm |
| Bolt anchor B6 | Steel | EN 10263 or EN 10269 | FV: ≥ 55 µm |
| Weld-on anchor | Steel | EN 10 025-2 | FV: ≥ 55 µm |

① Steel according to EN 10 025-2 and HALFEN specification

HALFEN Bolts, galvanized steel

| | Steel | | |
|---------------|----------------------------|--------------------------|-----------------------------|
| | Material | Standard | Zinc coat |
| Bolt | Steel (Sc) 4.6 or (Sc) 8.8 | EN ISO 898-1 | FV: ≥ 50 µm GVs: ≥ 12 µm |
| Hexagonal nut | Steel (Sc) 5 or (Sc) 8 | EN 898-2 | FV: ≥ 50 µm GVs: ≥ 12 µm |
| Washer | Steel | EN ISO 7089, EN ISO 7093 | FV: ≥ 50 µm GVs: ≥ 12 µm |

Stainless steel (NR):

Chromium is the most important alloy element in stainless steel. A specific chromium concentration ensures the generation of a passive layer on the surface of the steel that protects the base material against corrosion. This explains the high corrosion resistance of stainless steel.



Materials:

- WB** = Steel, mill finished
- FV** = Steel, hot-dip galvanized
- GVs** = Steel, zinc galvanized (with special coating)
- A4** = Stainless steel 1.4571/1.4404/1.4578
- HCR** = Stainless steel 1.4547/1.4529

(Sc) = Strength class

HALFEN Cast-in channels, stainless steel

| | Stainless steel | | |
|-----------------|--------------------------|-----------|------------------------------|
| | Material | Standard | Corrosion resistance class ② |
| Channel profile | 1.4404 or 1.4571 | EN 10 088 | III |
| | 1.4529 or 1.4547 | | V |
| Bolt anchor B6 | 1.4404, 1.4571 or 1.4578 | EN 10 088 | III |
| | 1.4529 or 1.4547 | | V |
| Weld-on anchor | 1.4404 or 1.4571 | EN 10 088 | III |
| | Steel ③ | | EN 10 025-2 |

HALFEN Bolts, stainless steel

| | Stainless steel | | |
|---------------|--|-------------------------|------------------------------|
| | Material | Standard | Corrosion resistance class ② |
| Bolt | 1.4404, 1.4571, 1.4578 (A4-50 or A4-70④) | EN 3506-1 and EN 10 088 | III |
| | 1.4529, HCR-50 | EN 3506-1 | V |
| Hexagonal nut | 1.4404, 1.4571, 1.4578 (A4-50, A4-70) | EN 3506-2 and EN 10 088 | III |
| | 1.4529, HCR-50 | | V |
| Washer | 1.4404, 1.4571 | EN 10 088 | III |
| | 1.4529 or 1.4547 | | V |

② See EN 1993-1-4, table A.3






③ Corrosion protection of mill finished anchor, see page 10

④ Stainless steel, strength class 70 bolts are delivered subject to availability from stock in A4-70 grade material or in a higher FA-70 (1.4462) grade material. This applies to all HALFEN Bolts listed as A4-70 material in this catalogue

HALFEN CAST-IN CHANNELS

General - all channels

Corrosion protection requirements


| Material and applications | | | | |
|---|--|--|--|--|
| | 1 | 2 | 3 | 4 |
| Description | Dry interior rooms | Damp interior rooms | Medium corrosion level | High level of corrosion |
| Definition of application areas | Anchor channels may only be used in components in indoor environments. For example: living and office spaces, schools, hospitals, commercial shops with the exception of wet rooms as in column 2. | Anchor channels may also be used in components in areas with normal humidity For example: kitchens, bathrooms and laundry-rooms in residential buildings. Exceptions; where permanent steam is present, and under water. | Anchor channels may also be used in outdoor environments (including industrial environments and coastal regions) or in wet rooms, if conditions are not especially aggressive (for example: continual immersion in sea water etc. as in column 4). | Anchor channels may also be used in exceptionally aggressive environments (for example: continual immersion in sea water) or in seawater spray zones, chloride environments in swimming pools or in environments with an extremely aggressive chemical atmosphere (for example: flue gas desulfurization plants or road tunnels where de-icer systems are in use). |
| Channel profile |  Steel 1.0038, 1.0044; EN 10025 Hot-dip galvanized $\geq 55\mu\text{m}$ ⑥ | Steel 1.0038, 1.0044; EN 10025 Hot-dip galvanized $\geq 55\mu\text{m}$ ⑥ Stainless steel 1.4307, 1.4567, 1.4541; EN 10088 | Stainless steel 1.4404, 1.4571, 1.4062, 1.4162, 1.4362 EN 10088 | Stainless steel 1.4462 ②, 1.4529, 1.4547 EN 10088 |
| Anchor |  Steel 1.0038, 1.0214, 1.0401, 1.1132, 1.5525; EN 10263, EN 10269 Hot-dip galvanized $55\mu\text{m}$ ⑥ | Steel 1.0038, 1.0214, 1.0401, 1.1132, 1.5525; EN 10263, EN 10269 Hot-dip galvanized $\geq 55\mu\text{m}$ ⑥ Stainless steel 1.4307, 1.4567, 1.4541; EN 10088 | Stainless steel 1.4404, 1.4571, 1.4362, 1.4578 EN 10088 Mill finish, 1.0038 ③ | |
| Special HALFEN Bolts with shaft and bolts in accordance with EN ISO 4018 |  Steel strength class 4.6/8.8 EN ISO 898-1 Zinc galvanized $\geq 5\mu\text{m}$ ④ | Steel strength class 4.6 / 8.8; EN ISO 898-1, Hot-dip galvanized $\geq 50\mu\text{m}$ ① ⑤ Stainless steel, strength class 50, 70 1.4307, 1.4567, 1.4541 EN ISO 3506-1 | Stainless steel Strength class 50, 70 1.4404, 1.4571, 1.4362, 1.4578 EN ISO 3506-1 | Stainless steel Strength class 50, 70 1.4462 ②, 1.4529, 1.4547 EN ISO 3506-1 |
| Washers EN ISO 7089 and EN ISO 7093-1 Product classification A, 200 HV |  Steel EN 10025 Zinc galvanized $\geq 5\mu\text{m}$ ④ | Steel EN 10025 Hot-dip galvanized $\geq 50\mu\text{m}$ ① ⑤ Stainless steel Steel grade A2, A3; EN ISO 3506-1 | Stainless steel Steel grade A4, A5 EN ISO 3506-1 | Stainless steel 1.4462 ②, 1.4529, 1.4547 EN ISO 3506-1 |
| Hexagonal nut EN ISO 4032 |  Steel strength class 5/8 EN ISO 898-2 Zinc galvanized $\geq 5\mu\text{m}$ ④ | Steel strength class 5/8 EN ISO 898-2 Hot-dip galvanized $\geq 50\mu\text{m}$ ① ⑤ Stainless steel, strength class 70, 80 Steel grade A2, A3 EN ISO 3506-2 | Stainless steel Strength class 70, 80 Steel grade A4, A5 EN ISO 3506-2 | Stainless steel Strength class 70, 80 1.4462 ②, 1.4529, 1.4547 EN ISO 3506-2 |
| ① or zinc galvanized with special coating $\geq 12\mu\text{m}$ ② 1.4462 not suitable for swimming baths ③ Steel in accordance with EN 10025, 1.0038 not for anchor channels 28/15 and 38/17 | | | ④ Zinc galvanized in accordance with EN ISO 4042 ⑤ Hot-dip galvanized in accordance with EN ISO 10684 ⑥ Hot-dip galvanized in accordance with EN ISO 1461 | |

HALFEN Channels (NR) mill finish welded-on anchors

Corrosion protection of the mill finished weld-on anchor is based on the following concrete cover c:

| Concrete cover c [mm] | | | | | |
|-----------------------|-------|--------|--------|-------|-------|
| | 30 | 35 | 40 | 50 | 60 |
| Profile HTA-CE | - | 40/22P | 52/34 | 55/42 | 72/48 |
| | - | 40/25 | 54/33 | - | - |
| | - | - | 50/30P | - | - |
| | - | - | 49/30 | - | - |
| Profile HZA | 38/23 | 41/22 | 53/34 | 64/44 | - |

The minimum concrete cover depends on local environmental conditions and bid specifications.



Concrete cover c

HALFEN Channels (NR) made completely in stainless steel

The HALFEN Cast-in channels "entirely of stainless steel" are not restricted to any minimum concrete cover as no relevant corrosion occurs.

Areas of application

- > bridge and tunnel construction (fastening of pipes, etc.)
- > construction of sewage treatment plants (fixing of spillovers)
- > chemical industry (installations exposed to aggressive substances)
- > ventilated façades, e.g. masonry renders
- > also for all structural reinforced concrete elements with higher demands on the concrete cover

HALFEN Channels made in stainless steel – HCR

The high corrosion resistance (HCR) HALFEN Cast-in channels are mandatory when high concentrations of chlorides, sulphur and nitrogen oxides are present.

Areas of application

- > road tunnels
- > structures in salt water
- > indoor swimming pools
- > areas not routinely cleaned
- > poorly ventilated parking garages
- > in narrow, major city streets

HALFEN CAST-IN CHANNELS



General - all channels

Identification

| Channel material | Type identification example |
|----------------------|-------------------------------------|
| 1.0038 / 1.0044 | HTA-CE 38/17 HZA 53/34 |
| A4: 1.4404 / 1.4571 | HTA-CE 38/17 - A4 HZA 53/34 - A4 |
| HCR: 1.4529 / 1.4547 | HTA-CE 38/17 - HCR |

Type identification


- ① Inside on the bottom of the channel.
- ② Additionally on the channel side

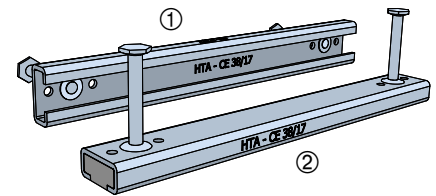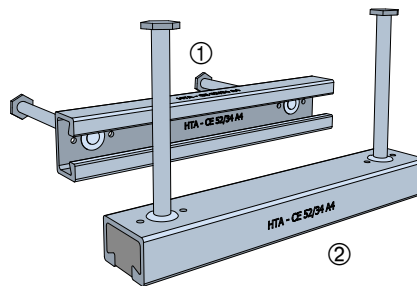

HALFEN CAST-IN CHANNELS

Dimensioning HTA-CE and HZA Cast-in Channels

Verification method according to EN 1992-4 / EOTA TR 047

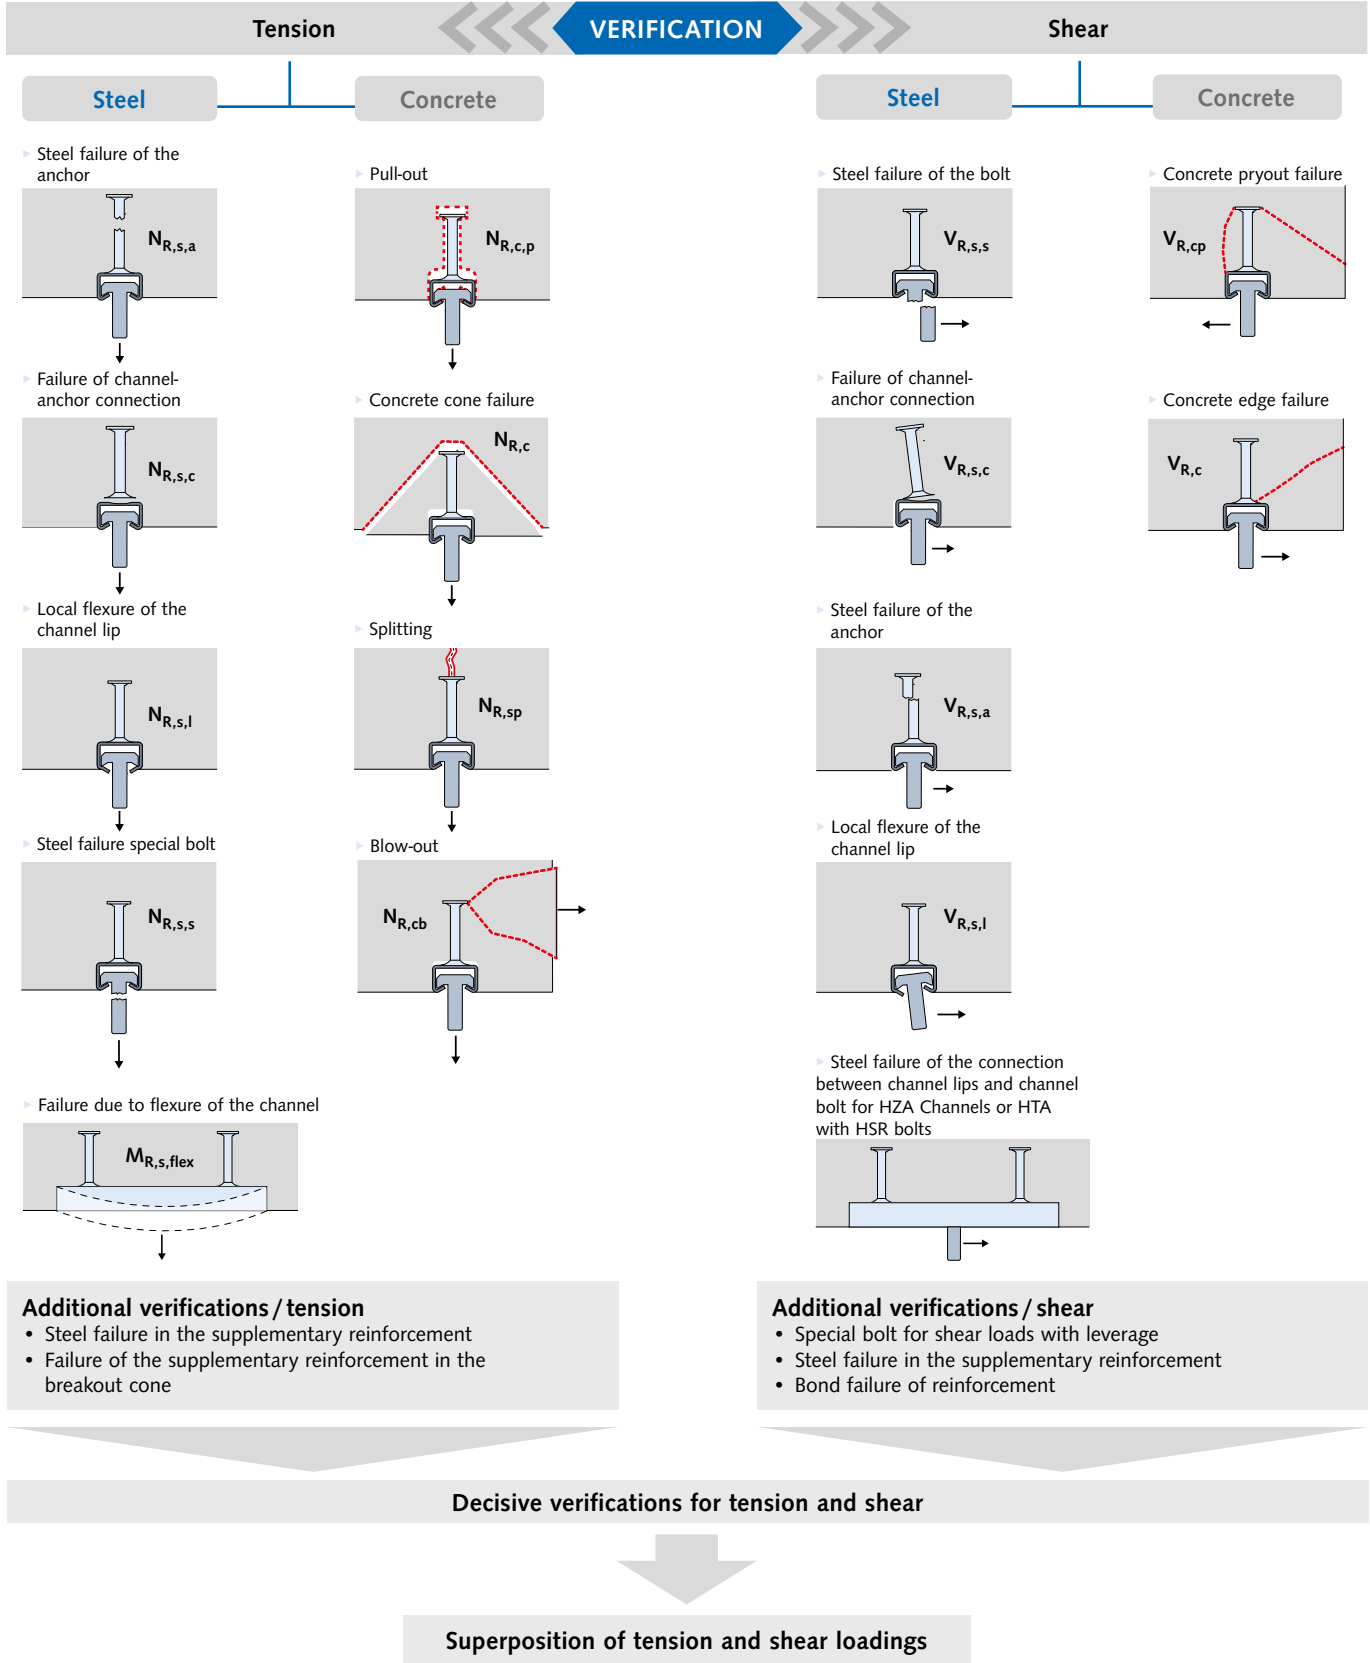

HALFEN CAST-IN CHANNELS

Dimensioning HTA-CE and HZA Cast-in Channels

Calculation basics

The following information is necessary to verify an anchor channel:


- › type of HALFEN Cast-in channel and material
- › length of the HALFEN Cast-in channel with number of anchors and spacing
- › position of the HALFEN Cast-in channel in the concrete, defined by its distance from the lower, upper, left and right edges of the component
- › thickness of the concrete elements
- › concrete strength class
- › condition of the concrete; cracked or verified as non-cracked
- › dense reinforcement in the vicinity of the anchor channel
- › HALFEN T-head bolt thread size
- › bolt positions
- › tensile load and shear load of each bolt

Technical support

Engineering services and technical support for your individual projects.




Our contact information can be found at the back of this catalogue.



Design values under dynamic loads for HTA-CE are given at page 25.

Verification method

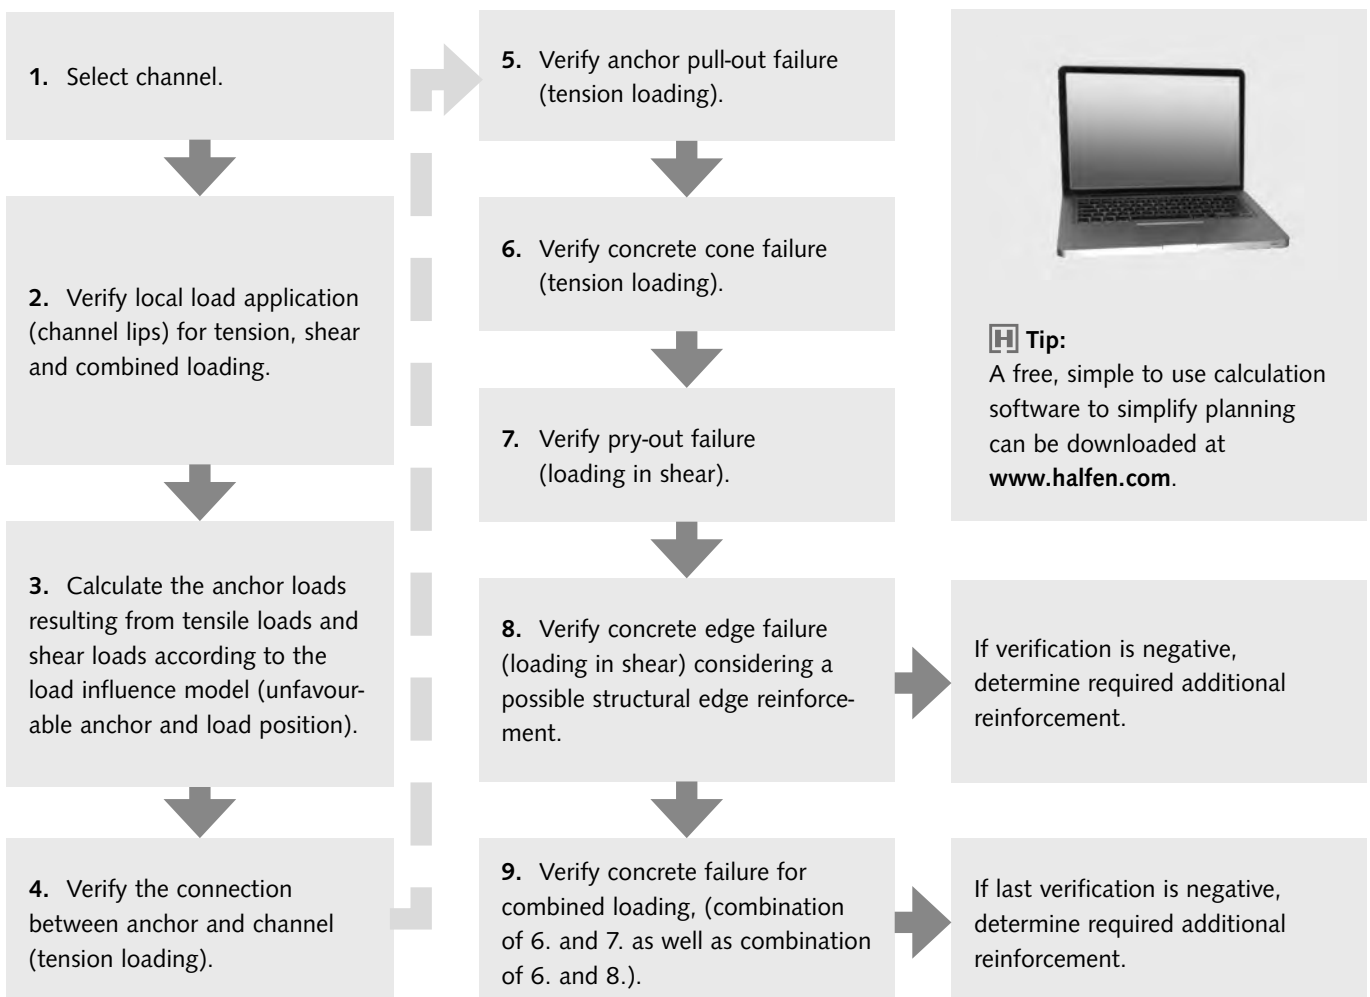

HALFEN CAST-IN CHANNELS

Dimensioning HTA-CE and HZA Cast-in Channels

HALFEN HTA-CE/HZA Software

The HALFEN Calculation program for HALFEN Cast-in channels according to the ETA provides the user with a convenient and very powerful calculation tool.

Verifications

EN1992-4 and EOTA TR047 require a wide range of verifications for cast-in channels and the concrete used. These verifications are processed by the user-friendly dimensioning Software. In just a few seconds the user is provided with a list of suitable HALFEN Cast-in channels for the relevant load situation.

Boundary conditions

The calculation takes into account all necessary boundary conditions, typical examples being:

- cracked or non-cracked concrete
- the geometry of the concrete components, in particular the distances from the channel to the component edge
- various reinforcement patterns
- consideration of several dimensioning or characteristic loads
- positioning of the loads with a definable adjustment range, and the option of shifting the defined bolt pattern along the complete channel length
- verification of the required HALFEN T-head bolts and if required also for stand-off installations
- verification of longitudinal forces in HALFEN HZA serrated cast-in channels

Input

The geometry and loads are entered interactively. Entries are displayed promptly in a 3D graphic. Entries can also be changed directly in the graphic. Click on the load, the measurement or the component line you want to change to make the required modification.

Input loads


In addition to direct input of bolt loads, it is also possible to calculate the resulting loads by entering the actions/loads caused by secondary components (for example, curtain wall applications).

Results

After calculation, the software output provides either the results for a preselected profile, or in the case of automatic selection a list of all suitable profiles. Profiles and T-bolts with in-complete verifications are high-lighted in red.



Screenshot 1: The HALFEN Anchor Channel Software start screen

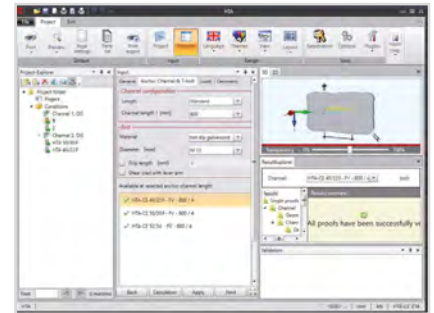

Screenshot 2: Input screen, HALFEN Anchor Channel Software



Screenshot 3: Interactive 3D display



Screenshot 4: Results list

All software can be found under: www.halfen.com ▶ Downloads ▶ Software/CAD

HALFEN CAST-IN CHANNELS

Dimensioning HTA-CE and HZA Cast-in Channels

HALFEN HTA-CE/HZA Software

Visual control

All verifications for the current channel profile are listed in a tree structure. Green check-marks indicate successful verifications. Red check-marks indicate unsatisfactory verifications.

For further visual control a progress bar on the right indicates the status of the verification process. Here too, red bars mean that a load has been exceeded, while green bars symbolize verifications that meet the criteria.

Detailed calculation information (with load positions, section sizes and utilization factors) can also be selected in a tree menu.

After selecting a HALFEN Cast-in channel and suitable bolts, the dimensioning results can be imported into the data list and saved.

Print-outs

Print-outs are possible in a brief and in a verifiable long version. The long version includes all decisive verifications, a diagram of necessary reinforcement and a 2D graphic of the geometry and load.


The latest version of the dimensioning program is available for download on the Internet at www.halfen.com.

System requirements:

- › Windows 10, Windows 8, Windows 7,
- › Microsoft .NET Framework 4.6



Screenshot 5: Overview of results

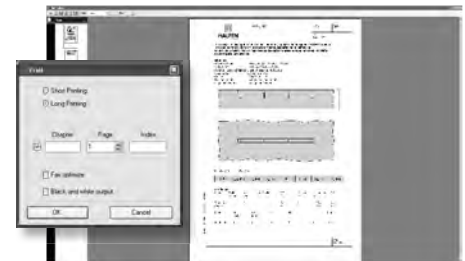

Screenshot 6: Print preview

Tender text example

HALFEN HTA-CE type Channel 49/30 - A4 - 350 - KF - ANK.A4

HALFEN HTA-CE Channel 49/30 with smooth channel lips for adjustable fixing of components,

according to European Technical Assessment ETA-09/0339, suitable for anchoring in reinforced or non-reinforced standard concrete in a strength class of at least C12/15 and a maximum C90/105 in accordance with EN 206 under quasi-static loading as well as fire exposure.

Type HTA-CE 49/30 - A4 - 350 - KF - ANK.A4

with

$N_{Rk,s,c} = 31 \text{ kN}$ = char. resistance, steel failure (tension), connection channel anchor


A4 = Carbon steel or stainless steel 1.4404 / 1.4571,

350 = Channel length [mm] with 3 anchors,

KF = Foam strip filler,

ANK.A4 = Anchor in stainless steel 1.4404 / 1.4571 / 1.4578,

or equivalent; deliver and install according to the manufacturer's instructions.

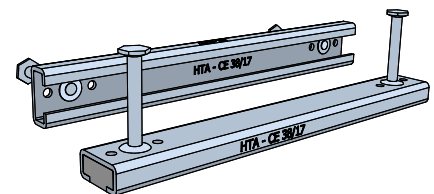

ETA - 09 / 0339

HTA-CE CAST-IN CHANNELS

The benefits at a glance

Apart from excellent adjustability, HALFEN Cast-in channels save considerable installation time. The result; faster construction and therefore reduced overall cost.



HALFEN HTA-CE Cast-in channels, cold-rolled

Safe and reliable

- › no damage to the reinforcement
- › approved for fire-resistant structural elements
- › suitable for use in concrete pressure and tensile stress zones
- › high corrosion resistance steels available
- › hot-rolled profiles suitable for dynamic loads
- › European Technical Assessment (ETA)
- › precise calculation with HALFEN Anchor channel software

Quick and economical

- › adjustable anchoring
- › bolts instead of welding
- › maximum efficiency when installing matrices and rows
- › cost effective installation using standard tools
- › optimised pre-planning reduces construction time
- › large range of types available for various requirements
- › no noise, no dust and no vibration during installation



HALFEN HTA-CE Cast-in channels, hot-rolled

HALFEN HTA-CE CAST-IN CHANNELS

Application Examples

CURTAIN WALL



Fixings for curtain wall façades

CURTAIN WALL




Fixings for curtain wall façades

SPORTS



Seat fixing in stadiums

LIFTS/ELEVATOR FIXINGS

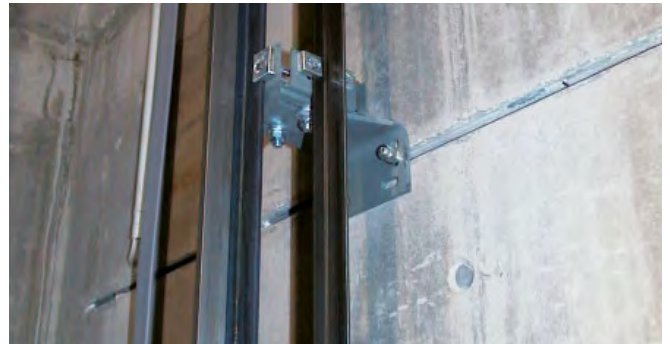


Fixing guide-rails with HALFEN Channels

NOISE BARRIERS



Fixings of noise barriers to concrete posts

BRIDGES

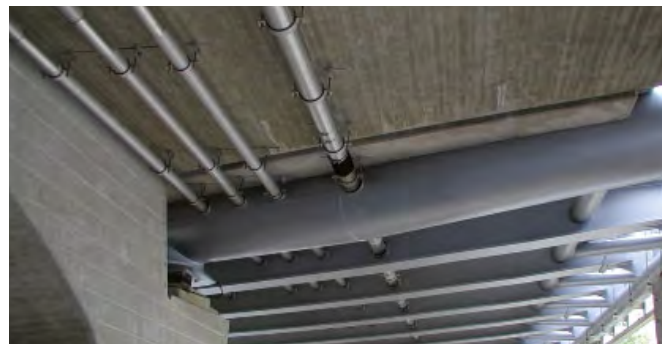

Fixings for drainage systems

UTILITY TUNNELS



Utility fixings in TBM tunnels with curved anchor channels

TUNNELS



Fixing of overhead cables in railway tunnels

HALFEN HTA-CE CAST-IN CHANNELS

Product range – Overview: channel and bolts

| Identification values HTA-CE | | | | | | |
|---|--------------|--|--------------|--|---------------|-------|
| Profile | HTA-CE 72/48 | HTA-CE 55/42 | HTA-CE 52/34 | HTA-CE 50/30P | HTA-CE 40/22P | |
| Type | hot-rolled | hot-rolled | hot-rolled | hot-rolled | hot-rolled | |
| Geometry HALFEN HTA-CE Channels | | | | | | |
| <p>Note: observe the installation height h_{nom}</p> | | | | | | |
| Material | Steel | ■ | ■ | ■ | ■ | |
| material description: see page 9 | A4 | ■ | - | ■ | ■ | |
| | HCR | - | - | - | - | |
| Bolts | HS 72/48 | HS 50/30 | HS 50/30 | HS 50/30 | HS 40/22 | |
| Threads | M20-M30 | M10-M20 | M10-M20 | M10-M20 | M10-M16 | |
| $s_{i,N}$ [mm] | 144 | 109 | 105 | 98 | 79 | |
| Profile load capacity* | | | | | | |
| $N^0_{Rd,s,l}$ [kN] | 66.7 | 61.1 | 40.0 | 23.9 | 21.1 | |
| $V^0_{Rd,s,l}$ [kN] | 81.1 | 61.1 | 43.5 | 32.8 | 19.4 | |
| $M_{Rd,s,flex}$ [Nm] | 7472 | 5606 | 2933 | 2437 | 1208 | |
| Geometry | | | | | | |
| h_{nom} [mm] ① ② | (191) | 182 (185) | 162 (164) | 112 | 97 | |
| b_{ch} [mm] | 72 | 54.5 | 52.5 | 49 | 39.5 | |
| h_{ch} [mm] | 48.5 | 42 | 33.5 | 30 | 23 | |
| I_y [mm ⁴] | Steel | | | | | |
| | NR | 349721 | 187464 | 93262 | 52896 | 20029 |
| h_{ef} [mm] | | 179 | 175 | 155 | 106 | 91 |
| c_{min} [mm] | | 150 | 100 | 100 | 75 | 50 |
| * Concrete load capacity has to be verified for each individual case (taking the geometric boundary conditions into account). | | | | | | |
| NR = Stainless steel | | $N^0_{Rd,s,l}$ = channel lip load capacity (tension) | | ① Nominal size and tolerance | | |
| c_{min} = minimal spacing channel/concrete edge | | $V^0_{Rd,s,l}$ = channel lip load capacity (shear) | | ② weld-on I- or T- anchors subject to available stock; | | |
| s_{slb} = axial spacing for bolts for $N^0_{Rd,s,l}$ | | for these (h_{nom}) values are in brackets | | | | |

HALFEN HTA-CE CAST-IN CHANNELS



Product range – Overview: channel and bolts

| Identification values HTA-CE | | HTA-CE 54/33 | HTA-CE 49/30 | HTA-CE 40/25 | HTA-CE 38/17 | HTA-CE 28/15 |
|---|-------|--|--------------|--|--------------|--------------|
| Profile | | HTA-CE 54/33 | HTA-CE 49/30 | HTA-CE 40/25 | HTA-CE 38/17 | HTA-CE 28/15 |
| Type | | cold-rolled | cold-rolled | cold-rolled | cold-rolled | cold-rolled |
| Geometry | | | | | | |
| HALFEN Channels HTA-CE | | | | | | |
| <p>Note: observe the installation height h_{nom}</p> | | | | | | |
| | | | | | | |
| Material material description: see page 9 | Steel | ■ | ■ | ■ | ■ | ■ |
| | A4 | ■ | ■ | ■ | ■ | ■ |
| | HCR | - | ■ | - | ■ | ■ |
| Bolts | | HS 50/30 | HS 50/30 | HS 40/22 | HS 38/17 | HS 28/15 |
| Threads | | M 10-M 20 | M 10-M 20 | M 10-M 16 | M 10-M 16 | M 6-M 12 |
| $s_{l,N}$ [mm] | | 107 | 100 | 80 | 76 | 56 |
| Profile load capacity* | | | | | | |
| $N_{Rd,s,l}^0$ [kN] | | 30.6 | 17.2 | 11.1 | 10.0 | 5.0 |
| $V_{Rd,s,l}^0$ [kN] | | | | | | |
| $M_{Rd,s,flex}$ [Nm] | | 2595 | 1455 | 931 | 504 | 276 |
| Geometry | | | | | | |
| h_{nom} [mm] ① ② | | 162 (164) | 103 | 89 | 81 | 50 |
| b_{ch} [mm] | | 54 | 50 | 40 | 38 | 28.0 |
| h_{ch} [mm] | | 33 | 30 | 25 | 17.5 | 15.25 |
| I_y [mm ⁴] | Steel | 72079 | 41827 | 20570 | 8547 | 4060 |
| | NR | | | 19097 | | |
| h_{ef} [mm] | | 155 | 94 | 79 | 76 | 45 |
| c_{min} [mm] | | 100 | 75 | 50 | 50 | 40 |
| * Concrete load capacity has to be verified for each individual case (taking the geometric boundary conditions into account). | | | | | | |
| c_{min} = minimal spacing channel/concrete edge | | $N_{Rd,s,l}^0$ = channel lip load capacity (tension) | | ① Nominal size and tolerance | | |
| NR = Stainless steel | | $V_{Rd,s,l}^0$ = channel lip load capacity (shear) | | ② weld-on I- or T- anchors subject to available stock; | | |
| s_{slb} = axial spacing for bolts for $N_{Rd,s,l}^0$ | | for these (h_{nom}) values are in brackets | | | | |

HALFEN HTA-CE CAST-IN CHANNELS

HALFEN HS Bolts




HALFEN HS Bolts

| Suitable for profile | HTA-CE 72/48 | | | | HTA-CE 55/42, 52/34, 54/33, 50/30P, 49/30 | | | |
|----------------------|---|--------------------------|-------|-------|---|-------------------------|------------------------------------|-----------------------------------|
| Bolt | HS 72/48 | | | | HS 50/30 | | | |
| Bolt dimensions |  | | | |  | | | |
| l [mm] | M20 | M24 | M27 | M30 | M10 | M12 | M16 | M20 |
| 20 | - | - | - | - | - | - | - | - |
| 30 | - | - | - | - | FV8.8 | FV4.6 A4-70 | - A4-50 | - |
| 40 | - | - | - | - | FV8.8 | FV4.6 FV8.8 A4-70 | FV4.6 FV8.8 A4-50 | - |
| 45 | - | - | - | - | - | FV8.8 | - | FV4.6 FV8.8 A4-50 |
| 50 | FV4.6 | FV4.6 A4-50 | - | - | FV8.8 | FV4.6 FV8.8 A4-70 | FV4.6 A4-50 HCR-50* | - |
| 55 | - | - | - | - | - | - | - | FV4.6 A4-50 A4-70* |
| 60 | FV8.8 | - | - | - | - | FV4.6 FV8.8 | FV4.6 FV8.8 A4-50 | FV8.8 |
| 65 | - | - | - | - | - | - | - | FV4.6 FV8.8 |
| 70 | - | - | - | - | - | FV8.8 | - | - |
| 75 | FV4.6 GVs8.8 | FV4.6 FV8.8 | FV4.6 | FV4.6 | - | - | - | FV4.6 A4-50 A4-70* |
| 80 | - | - | - | - | - | FV4.6 FV8.8 | FV4.6 FV8.8 A4-50 | FV4.6 FV8.8 |
| 100 | FV4.6 GVs8.8 | FV4.6 GVs8.8 A4-50 | FV8.8 | FV4.6 | - | FV4.6 FV8.8 A4-50 | FV4.6 FV8.8 HCR-50* | FV4.6 FV8.8 A4-50 A4-70* |
| 125 | - | - | - | - | - | FV4.6 FV8.8 | - | FV4.6 FV8.8 A4-50* |
| 150 | FV4.6 | FV4.6 GVs8.8 | - | FV4.6 | - | - GVs4.6 | FV4.6 A4-50 HCR-50* FV8.8 | - FV8.8 A4-50* |
| 175 | - | - | - | - | - | - | - | - |
| 200 | FV4.6 | FV4.6 | - | FV4.6 | - | - GVs4.6 | - GVs4.6 | - GVs4.6 |
| 250 | - | - | - | - | - | - | - | - |
| 300 | - | - | - | - | - | - | GVs4.6 | - |

Material types: see page 9-10 *on request ⓘ Other bolt lengths and materials on request!

HALFEN HTA-CE CAST-IN CHANNELS

HALFEN HS Bolts

| Suitable for profile | HTA-CE 40/22P, 40/25 | | | HTA-CE 38/17 | | | HTA-CE 28/15 | | | |
|----------------------|---|--------|--------|---|--------|--------|---|--------|--------|--------|
| Bolt | HS 40/22 | | | HS 38/17 | | | HS 28/15 | | | |
| Bolt dimensions |  | | |  | | |  | | | |
| l [mm] | M10 | M12 | M16 | M10 | M12 | M16 | M6 | M8 | M10 | M12 |
| 20 | FV4.6 | - | - | - | - | - | - | - | - | - |
| 30 | FV4.6 | FV4.6 | - | FV4.6 | FV4.6 | - | - | - | FV4.6 | - |
| | FV8.8 | FV8.8 | - | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | GVs4.6 | GVs4.6 |
| 40 | A4-70 | A4-50 | A4-50 | A4-70 | A4-70 | - | - | A4-70 | A4-70 | - |
| | FV4.6 | FV4.6 | FV4.6 | - | - | FV4.6 | - | - | - | - |
| | FV8.8 | FV8.8 | FV8.8 | - | - | - | - | - | FV8.8 | - |
| 45 | - | - | - | - | - | - | - | - | - | - |
| | - | FV8.8 | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| 50 | FV4.6 | FV4.6 | FV4.6 | FV4.6 | FV4.6 | FV4.6 | - | - | FV4.6 | - |
| | - | FV8.8 | FV8.8 | GVs4.6 | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | GVs4.6 |
| | A4-70 | A4-50 | A4-70 | - | A4-70 | - | - | - | A4-50 | - |
| 55 | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| 60 | FV4.6 | FV4.6 | FV4.6 | - | - | - | - | - | - | - |
| | FV8.8 | FV8.8 | FV8.8 | GVs4.6 | GVs4.6 | FV8.8 | - | - | - | - |
| | - | - | - | - | GVs8.8 | GVs4.6 | - | GVs4.6 | GVs4.6 | - |
| 65 | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| 70 | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| 75 | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| | - | - | - | - | - | - | - | - | - | - |
| 80 | FV4.6 | FV4.6 | FV4.6 | - | - | FV4.6 | - | - | - | - |
| | - | FV8.8 | FV8.8 | GVs4.6 | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | GVs4.6 |
| | - | A4-50 | A4-50 | - | A4-70 | A4-50 | - | - | A4-70 | - |
| 100 | FV4.6 | FV4.6 | FV4.6 | - | - | FV4.6 | - | - | - | - |
| | - | FV8.8 | FV8.8 | GVs4.6 | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | - |
| | - | - | - | - | - | - | - | - | - | - |
| 125 | - | - | - | - | - | - | - | - | - | - |
| | FV4.6 | FV4.6 | FV4.6 | - | - | - | - | - | - | - |
| | - | - | - | - | GVs4.6 | GVs4.6 | - | - | GVs4.6 | - |
| 150 | - | - | - | - | - | - | - | - | - | - |
| | - | GVs4.6 | FV4.6 | GVs4.6 | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | - |
| | - | - | - | - | - | - | - | - | A4-50* | - |
| 200 | - | - | - | - | - | - | - | - | - | - |
| | - | GVs4.6 | GVs4.6 | - | GVs4.6 | GVs4.6 | - | - | GVs4.6 | - |
| | - | - | - | - | - | - | - | - | A4-50* | - |
| 250 | - | - | - | - | - | - | - | - | - | - |
| | - | - | GVs4.6 | - | - | - | - | - | - | - |
| 300 | - | - | GVs4.6 | - | - | - | - | - | - | - |

Material types: see page 9-10 *on request ⓘ Other bolt lengths and materials on request!



HALFEN HTA-CE CAST-IN CHANNELS

HALFEN HS Bolts

HALFEN Bolts – Type HS



- > two direction load capacity
- > identified on bolt tip with **1 notch**

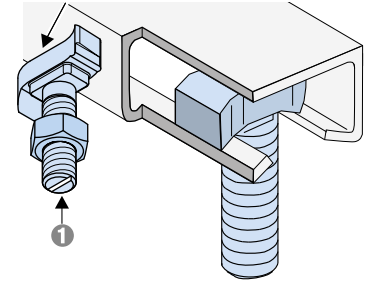


- HALFEN 4.6** Strength class 4.6/8.8 galvanized (GVs) or hot-dip galvanized (FV)
- HALFEN A4-70** Material grade A4-50/A4-70/FA-70 Stainless steel
- HALFEN HCR50** Strength class 50 Stainless steel (1.4529/1.4547)

Standard HALFEN Bolts (no nib or serration) for all profile types HTA-CE

Calculating the bolt length l_{req} for HALFEN Bolts

$$l_{req} = t_{fix} + f + h + v_{min}$$

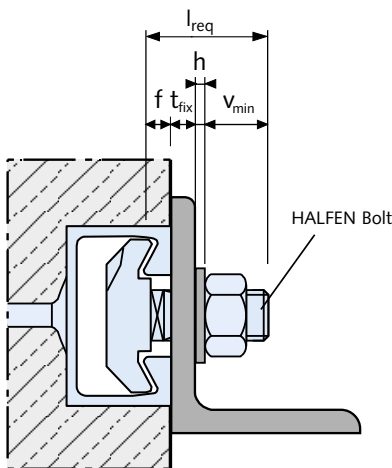

| Dimensions v_{min} | |
|----------------------|----------------|
| Bolt diameter | v_{min} [mm] |
| M6 | 11.0 |
| M8 | 12.5 |
| M10 | 14.5 |
| M12 | 17.0 |
| M16 | 20.5 |
| M20 | 26.0 |
| M24 | 29.0 |
| M27 | 31.5 |
| M30 | 33.5 |

| Lip dimensions f | |
|--------------------|----------|
| Channel profile | f [mm] |
| 28/15 | 2.3 |
| 38/17 | 3.0 |
| 40/22P | 6.0 |
| 40/25 | 5.6 |
| 49/30 | 7.4 |
| 50/30P | 7.9 |
| 52/34 | 10.5 |
| 54/33 | 7.9 |
| 55/42 | 12.9 |
| 72/48 | 15.5 |

- l_{req} = required bolt length
- t_{fix} = thickness of clamped component
- f = profile lip height
- h = washer thickness
- v_{min} = nut height EN ISO 4032 + overhang approximately 5 mm (\geq M20: 7 mm)

Bolt design values

The table on the right lists the design resistance of HALFEN Bolts with different thread diameters, materials and strength classes.

$N_{Rd,s,s}$ is the resistance against tension loads, $V_{Rd,s,s}$ is the the resistance against shear loads and $M^0_{Rd,s,s}$ is the flexural resistance when subjected to transverse load induced with a lever arm.

| Design resistance | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|-------------------|---------------------|------|------|------|------|-------|-------|-------|--------|--------|
| 4.6 | $N_{Rd,s,s}$ [kN] | 4.0 | 7.3 | 11.6 | 16.9 | 31.4 | 49.0 | 70.6 | 91.8 | 112.2 |
| | $V_{Rd,s,s}$ [kN] | 2.9 | 5.3 | 8.3 | 12.1 | 22.6 | 35.2 | 50.7 | 66.0 | 80.6 |
| | $M^0_{Rd,s,s}$ [Nm] | 3.8 | 9.0 | 17.9 | 31.4 | 79.8 | 155.4 | 268.9 | 398.7 | 538.7 |
| 8.8 | $N_{Rd,s,s}$ [kN] | 10.7 | 19.5 | 28.6 | 44.9 | 83.7 | 130.7 | 188.3 | 244.8 | 299.2 |
| | $V_{Rd,s,s}$ [kN] | 6.4 | 11.7 | 17.2 | 27.0 | 50.2 | 78.4 | 113.0 | 146.9 | 179.5 |
| | $M^0_{Rd,s,s}$ [Nm] | 9.8 | 24.0 | 42.5 | 83.8 | 213.1 | 415.4 | 718.4 | 1065.2 | 1439.4 |
| A4-50 | $N_{Rd,s,s}$ [kN] | 3.5 | 6.4 | 10.1 | 14.8 | 27.4 | 42.8 | 61.7 | 80.2 | 98.1 |
| | $V_{Rd,s,s}$ [kN] | 2.5 | 4.6 | 7.3 | 10.6 | 19.8 | 30.9 | 44.5 | 57.9 | 70.7 |
| | $M^0_{Rd,s,s}$ [Nm] | 3.2 | 7.9 | 15.7 | 27.5 | 70.0 | 136.3 | 235.8 | 349.7 | 472.5 |
| A4-70 | $N_{Rd,s,s}$ [kN] | 7.5 | 13.7 | 21.7 | 31.6 | 58.8 | 91.7 | 132.1 | 171.8 | 210.0 |
| | $V_{Rd,s,s}$ [kN] | 5.4 | 9.9 | 15.6 | 22.7 | 42.2 | 66.0 | 95.1 | 123.6 | 151.0 |
| | $M^0_{Rd,s,s}$ [Nm] | 6.9 | 16.8 | 33.5 | 58.8 | 149.4 | 291.3 | 503.7 | 746.9 | 1009.2 |

HALFEN HTA-CE CAST-IN CHANNELS


HALFEN HS Bolts

Torque values HS

Standard

Components are braced against the concrete and anchor channel.


Torque is applied as in the following table and must not be exceeded.

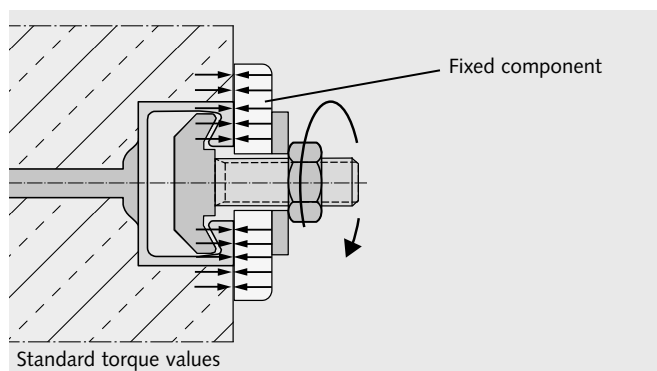

Steel-Steel

Components are braced against the anchor channels using suitable washers.

Torque is applied as in the following table and must not be exceeded.

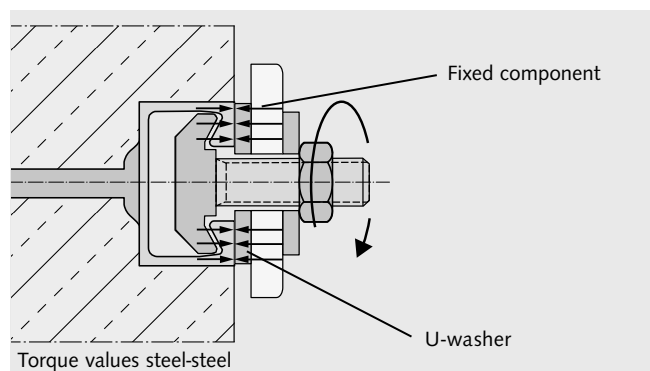

Standard: Recommended torque values T_{inst}

| HTA-CE Profile | HALFEN Bolt HS...M [mm] | Torque value T_{inst} [Nm] | |
|-----------------|-------------------------|---|--|
| | | Steel 4.6; 8.8 Stainless steel Strength class 50 Strength class 70 | |
| 28/15 | 6 | 3 | |
| | 8 | 8 | |
| | 10 | 13 | |
| | 12 | 15 | |
| 38/17 | 10 | 15 | |
| | 12 | 25 | |
| | 16 | 40 | |
| 40/22P 40/25 | 10 | 15 | |
| | 12 | 25 | |
| | 16 | 45 | |
| 49/30 50/30P | 10 | 15 | |
| | 12 | 25 | |
| | 16 | 60 | |
| | 20 | 75 | |
| 52/34 54/33 | 10 | 15 | |
| | 12 | 25 | |
| | 16 | 60 | |
| | 20 | 120 | |
| 55/42 | 10 | 15 | |
| | 12 | 25 | |
| | 16 | 60 | |
| | 20 | 120 | |
| 72/48 | 20 | 120 | |
| | 24 | 200 | |
| | 27 | 300 | |
| | 30 | 380 | |

Steel-Steel: Recommended torque values T_{inst}

| HTA-CE Profile | HALFEN Bolt HS...M [mm] | Torque value T_{inst} [Nm] | | | |
|-----------------|-------------------------|------------------------------|-----------|--------------------------------------|--------------------------------------|
| | | Steel 4.6 | Steel 8.8 | Stainless steel Strength class 50 | Stainless steel Strength class 70 |
| 28/15 | 6 | 3 | - | 3 | - |
| | 8 | 8 | 20 | 8 | 15 |
| | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| 38/17 | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| | 16 | 65 | 180 | 60 | 130 |
| 40/22P 40/25 | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| | 16 | 65 | 180 | 60 | 130 |
| 49/30 50/30P | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| | 16 | 65 | 180 | 60 | 130 |
| | 20 | 130 | 360 | 120 | 250 |
| 52/34 54/33 | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| | 16 | 65 | 180 | 60 | 130 |
| | 20 | 130 | 360 | 120 | 250 |
| 55/42 | 10 | 15 | 40 | 15 | 30 |
| | 12 | 25 | 70 | 25 | 50 |
| | 16 | 65 | 180 | 60 | 130 |
| | 20 | 130 | 360 | 120 | 250 |
| 72/48 | 20 | 130 | 360 | 120 | 250 |
| | 24 | 230 | 620 | 200 | 440 |
| | 27 | 340 | 900 | 300 | 650 |
| | 30 | 460 | 1200 | 400 | 850 |




Torque values apply only to bolts in delivery condition (unlubricated).

HALFEN HTA-CE CAST-IN CHANNELS

HALFEN HSR Bolts with nib

HALFEN Bolts – Type HSR (not part of the ETA)

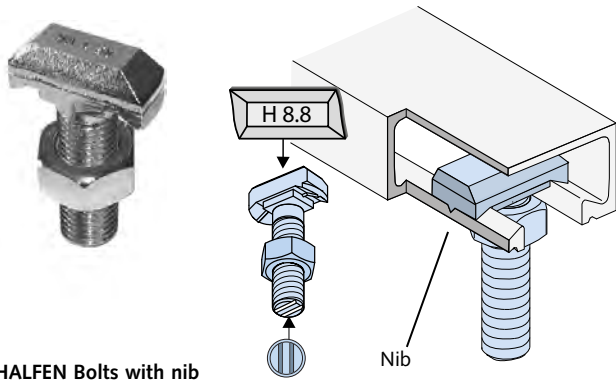

HALFEN Bolts with nib

- > only for hot-rolled profiles: 40/22P, 50/30P, 52/34, 72/48
- > only for carbon steel: WB and FV
- > load capacity in all directions
- > load capacity in channel longitudinal direction according to expert report
- > identification on bolt tip with **2 notches**

Bolt design values HSR

| Available HSR | | | | |
|----------------------|-----------|---------------|---------------|---------------|
| Suitable for profile | 72/48 | 52/34, 50/30P | | 40/22P |
| Bolt | HSR 72/48 | HSR 50/30 | | HSR 40/22 |
| Bolt dimensions | | | | |
| l [mm] | M20 | M16 | M20 | M16 |
| 40 | - | FV8.8 | - | GVs8.8 |
| 45 | - | - | GVs8.8 | - |
| 60 | - | GVs8.8, FV8.8 | GVs8.8 | GVs8.8, FV8.8 |
| 75 | FV8.8 | GVs8.8 | GVs8.8, FV8.8 | - |
| 80 | - | FV8.8 | - | - |
| 100 | - | GVs8.8 | - | - |

GVs = Zinc galvanized with special coating
FV = Hot-dip galvanized

| Torque values HSR | |
|-------------------|--------------------|
| HSR 8.8 | Torque values [Nm] |
| M16 | 200 |
| M20 | 400 |

| Load capacity HSR | |
|-------------------|--|
| | Grade 8.8 in channel longitudinal direction |
| Bolt HSR | F_{Rd} [kN] |
| 40/22 - M16 | 7.0 |
| 50/30 - M16 | 7.0 |
| 50/30 - M20 | 10.5 |
| 72/48 - M20 | 10.5 |

If loads in the channel's longitudinal direction have to be verified, we recommend using serrated HALFEN HZA Channels with serrated HALFEN HZS Bolts. See pages 27-34.

HALFEN HTA-CE CAST-IN CHANNELS

HTA-CE Dynamic loads/Edge and bolt spacing

Design resistance for $n = 2 \times 10^6$ load cycles

| Profile HTA-CE | Type | $\Delta N_{Rd,s,0,n}$ | Allowable bolts | Material |
|----------------|------|-----------------------|-----------------|-----------|
| 40/22P | FV | 2.94 | M12 | 8.8 |
| | | | M16 | 4.6 / 8.8 |
| 50/30P | FV | 3.6 | M16 | 4.6 / 8.8 |
| | | | M20 | 4.6 / 8.8 |
| 52/34 | FV | 4.9 | M16 | 8.8 |
| | | | M20 | 8.8 |

Example (also see diagram to the right):


Profile HTA-CE 52/34 - FV (standard, hot-dip galvanized), for $n = 2 \times 10^6$ load cycles:

$$N_{Rd} = 55 \div 1.8 = 30.6 \text{ (taken from the ETA)}$$

N_{Ed} from permanent load = 10 kN (assumption)

$$\Delta N_{Rd,E,n} = (30.6 - 10) \times 4.9/30.6 = 3.3 \text{ kN}$$

Diagram: HTA-CE 52/34 - FV for $n = 2 \times 10^6$ load cycles

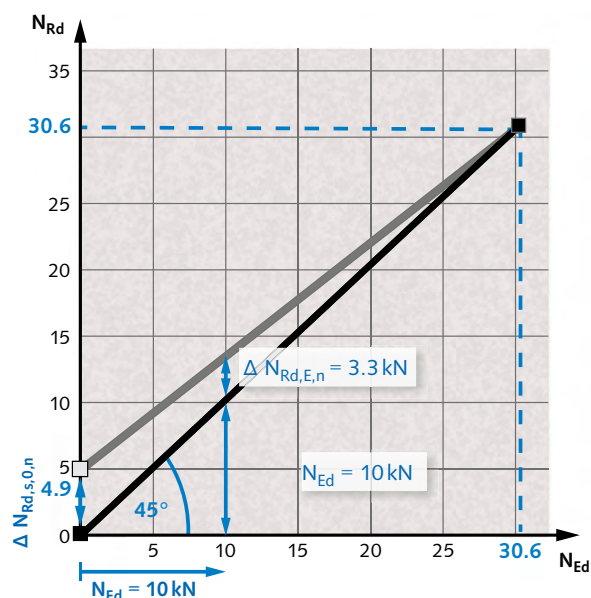

Minimum edge distances and minimum bolt spacing

Anchors must be installed at a minimum distance from the component edges.

The distance depends on the selected channel profile.

According to the ETA, the spacing between bolts s_{cbo} must not be less than $5 \times d_s$.

Reduction of the load bearing capacity is required if $s_{cbo} < s_{sl,N}^*$ (see table on page 18).

The concrete load-bearing capacity must be verified for each individual case using the HALFEN Software!

* $s_{sl,N}$ = centre distance of the bolts subject to $N_{Rd,s,l}$
See tables pages 18-19

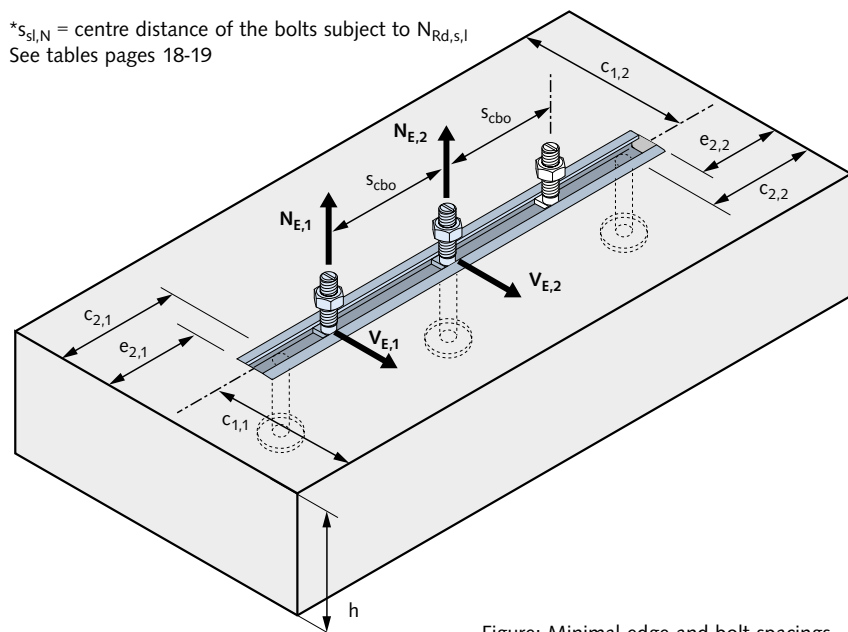


Figure: Minimal edge and bolt spacings

Edge and bolt spacing [mm]

| HTA-CE Profiles | M | $s_{s,min}$ | c_{min} | e_{min} |
|-----------------|----|-------------|-----------|-----------|
| 28/15 | 6 | 30 | 40 | 15 |
| | 8 | 40 | 40 | 15 |
| | 10 | 50 | 40 | 15 |
| 38/17 | 10 | 50 | 50 | 25 |
| | 12 | 60 | 50 | 25 |
| | 16 | 80 | 50 | 25 |
| 40/25 40/22P | 10 | 50 | 50 | 25 |
| | 12 | 60 | 50 | 25 |
| | 16 | 80 | 50 | 25 |
| 49/30 | 10 | 50 | 75 | 50 |
| | 12 | 60 | 75 | 50 |
| | 16 | 80 | 75 | 50 |
| 50/30P | 20 | 100 | 75 | 50 |
| | 10 | 50 | 75 | 40 |
| | 12 | 60 | 75 | 40 |
| 52/34 54/33 | 16 | 80 | 75 | 40 |
| | 20 | 100 | 75 | 40 |
| | 10 | 50 | 100 | 65 |
| 55/42 | 12 | 60 | 100 | 65 |
| | 16 | 80 | 100 | 65 |
| | 20 | 100 | 100 | 65 |
| 72/48 | 20 | 100 | 150 | 115 |
| | 24 | 120 | 150 | 115 |
| | 27 | 135 | 150 | 115 |
| | 30 | 150 | 150 | 115 |

HALFEN HTA-CE CAST-IN CHANNELS

HTA-CE standard lengths/HTA-CS – Curved Solution

HTA-CE Standard lengths

Our standard lengths are optimized lengths to avoid cut-offs. We provide these lengths with order numbers in our current price list.

We deliver HALFEN HTA-CE Cast-in channels in any length from 100 mm to 6070 mm. Any number of anchors with individual spacing is possible. Please contact us at www.halfen.com or see the back inside cover of this catalogue for contact information.

The calculation program for HALFEN Cast-in channels according to the ETA is a convenient and very powerful calculation tool for any channel length, anchor spacing and concrete cover. Free download at [www.halfen.com/downloads/software-cad/...](http://www.halfen.com/downloads/software-cad/)

① Does not apply to HTA-CE 52/34, HTA-CE 54/33
 ② Does not apply to HTA-CE 40/22P - A4

HTA-CE standard lengths and number of anchors

| Length [mm] / Number of anchors | | | | |
|---------------------------------|--------------|---|-------------------------|---------------------|
| HTA-CE 72/48 | HTA-CE 55/42 | HTA-CE 40/25, 50/30P, 49/30, 52/34, 54/33 | HTA-CE 40/22P | HTA-CE 28/15, 38/17 |
| 150/2 | 150/2 | 150/2 | 150/2 | 100/2 |
| 200/2 | 200/2 | 200/2 | 200/2 | 150/2 |
| 250/2 | 250/2 | 250/2 | 250/2 | 200/2 |
| 300/2 | 300/2 | 300/2 | 300/2 | 250/2 |
| 350/3 | 350/3 | 350/3 | 350/3 | 300/3 |
| 400/3 | 400/3 | 400/3 | 400/3 | 350/3 |
| 550/3 | 550/3 | 550/3 | 550/3 | 450/3 |
| 1050/5 | 1050/5 | 800/4 | 800/4 ^② | 550/4 |
| 6070/25 | 6070/25 | 1050/5 | 1050/5 | 850/5 |
| - | - | 3030/13 ^① | 1300/6 ^② | 1050/6 |
| - | - | 6070/25 | 1550/7 ^② | 3030/16 |
| - | - | - | 1800/8 ^② | 6070/31 |
| - | - | - | 2050/9 ^② | - |
| - | - | - | 2300/10 ^② | - |
| - | - | - | 2550/11 ^② | - |
| - | - | - | 3030/13 ^② | - |
| - | - | - | 6070/25 | - |
| Anchor spacing ≤ 250 mm | | | Anchor spacing ≤ 200 mm | |


HALFEN HTA-CS Channels – Curved Solution

Areas of application:

- › tunnel construction
- › precast elements for utility tunnels
- › curved walls
- › sewage plants



Curved HALFEN Cast-in channels in tunnel segments

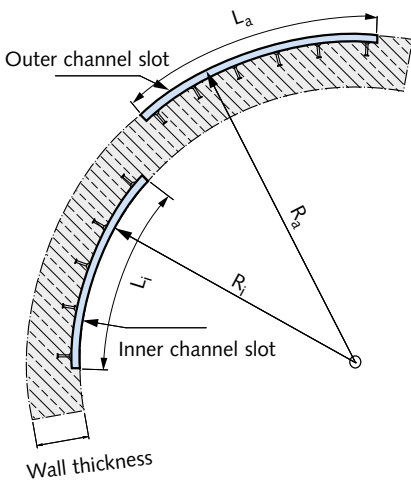

R_i = Radius of inner channel slot
 R_a = Radius of outer channel slot
 L = Length of channel after bending (maximum 5400 mm)

Ordering example:

HALFEN Cast-in channel, curved
 HTA-CS 52/34-Q - A4, $R_i = 4000$ mm, $L = 1050$ mm

| HTA-CS Smallest radius [m]* | | | | | | | | | | |
|-----------------------------|----------|--------------|--------------|--------------|---------------|--------------|---------------|--------------|--------------|--------------|
| Profile | Material | HTA-CS 72/48 | HTA-CS 54/33 | HTA-CS 52/34 | HTA-CS 50/30P | HTA-CS 49/30 | HTA-CS 40/22P | HTA-CS 40/25 | HTA-CS 38/17 | HTA-CS 28/15 |
| Inner channel slot: | □ | on request | 0.80 m | 0.75 m | on request | 0.80 m | on request | 1.10 m | 0.70 m | 0.75 m |
| | □ | on request | 0.80 m | 0.80 m | on request | 0.80 m | on request | 0.90 m | 0.70 m | 0.75 m |
| Outer channel slot: | □ | on request | 4.00 m | 3.60 m | on request | 3.00 m | on request | 2.20 m | 3.20 m | 2.00 m |
| | □ | on request | 4.00 m | 3.60 m | on request | 5.70 m | on request | 1.70 m | 5.40 m | 7.80 m |

□ hot-dip galvanized □ stainless A4

* please contact our technical support team for more detailed information

HALFEN HZA CAST-IN CHANNELS, serrated

The benefits at a glance

Apart from providing excellent adjustability, HALFEN Cast-in channels save considerable installation time. The result: faster construction and therefore reduced overall costs.



 serrated
  3D-Loads
 
European Technical Assessment
ETA-20/1081

HZA HALFEN Cast-in channels, cold-rolled, serrated

Safe and reliable



- › no damage to the main reinforcement
- › suitable for installation in concrete pressure and concrete tensile zones
- › hot-rolled channels, suitable for dynamic loads
- › European Technical Assessment (ETA)
- › suitable for use in earthquake safety design

Quick and economical

- › adjustable anchorage
- › bolts instead of welding
- › maximum efficiency when installing in rows
- › cost-effective installation using standard tools
- › optimized pre-planning reduces construction time
- › large range of channels types for various applications
- › user-friendly installation; no noise, dust and vibration




European Technical Assessment
ETA-17/0728

 serrated
  3D-loads
  suitable for dynamic loads
  suitable for seismic loading
  suitable for applications in safety relevant areas in nuclear facilities

HZA-PS HALFEN Cast-in channels, hot-rolled, serrated




European Technical Assessment
ETA-20/1081

 serrated
  3D-loads
  suitable for dynamic loads
  suitable for seismic loading

HZA DYNAGRIP® Cast-in channels, serrated



HZA-PS CAST-IN CHANNELS

More Information on the HZA-PS is available at:


www.halfen.com › Products › Fixing systems › HZA - DYNAGRIP® Cast-In Channels

Or scan the QR-Code and select the current "HZA-PS" catalogue.

HALFEN HZA CAST-IN CHANNELS

Application Examples: Installations with HALFEN HZA Cast-In Channels

CURTAIN WALL

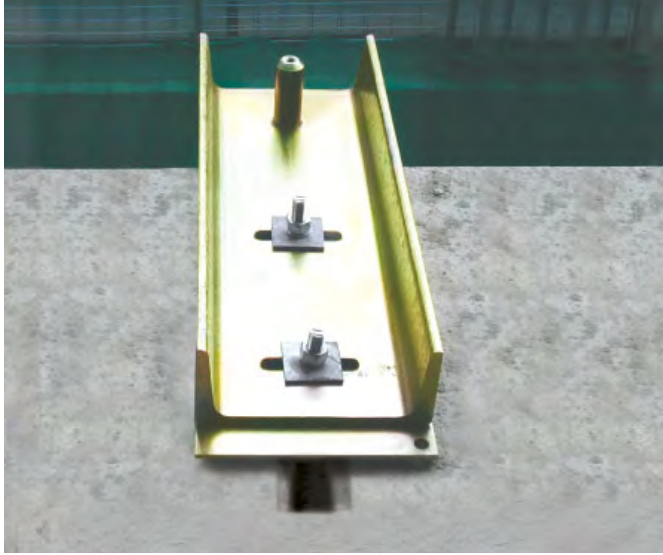

Fixings of a Curtain wall façade, HZA near edge installation

FAÇADES



Fixings for emergency access balconies (Vertical installation of HALFEN Channels)

INDUSTRIAL PLANT INSTALLATIONS



Pipe supports on vertical HZA Channels

SKI LIFT



Fixing of the drive unit for a ski lift

LIFTS / ELEVATORS



Fixing for guide-rails

INDUSTRIAL BUILDING



Vertical channels in columns to attach further components

HALFEN HZA CAST-IN CHANNELS

Product range

| Available HZA Channels | | | | | | | | |
|---|--|------------------------------|------------------------|------------------------|------------------------|--|-------------|--|
| Profile | HZA 64/44 DYNAGRIP® | HZA 53/34 DYNAGRIP® | HZA 41/27 DYNAGRIP® | HZA 38/23 DYNAGRIP® | HZA 29/20 DYNAGRIP® | HZA 41/22 | | |
| Geometry HALFEN HZA Channels | hot-rolled | | | | | | cold-rolled | |
| Note: Observe the ① installation height h_{nom} | | | | | | | | |
| ① Nominal size and tolerance | | | | | | | | |
| Material | Steel | ■ | ■ | ■ | ■ | ■ | ■ | |
| material description: see page 9-10 | A4 | ■ | ■ | - | ■ | - | ■ | |
| Bolts | HZS 64/44 | HZS 53/34 | HZS 38/23 | HZS 38/23 | HZS 29/20 | HZS 41/22 | | |
| Threads | M20-M24 | M16-M20 | M12-M16 | M12-M16 | M12 | M12-M16 | | |
| $s_{i,N} = s_{i,V}$ [mm] | 128 | 105 | 80 | 76 | 58 | 83 | | |
| Profile load capacity* | | | | | | | | |
| $N^0_{Rd,s,l}$ [kN] | Steel | 58.9 | 45.8 | 29.8 | 21.8 | 12.7 | 10.1 | |
| | NR | 52.4 | 30.6 | - | 22.2 | - | 14.5 | |
| $V^0_{Rd,s,l,y}$ [kN] | Steel | 86.8 | 56.2 | 29.8 | 24.4 | 11.2 | 10.1 | |
| | NR | 52.4 | 30.6 | - | 17.4 | - | 12.6 | |
| $V_{Rd,s,l,x}$ [kN] | Steel | 39.7 | 18.3 | 10.9(M12) 14.8(M16) | 10.9 | 7.0 | 6.7 | |
| | NR | 38.2 | 20.5 | - | 11.5 | - | 5.6 | |
| $M_{Rd,s,flex}$ [Nm] | Steel | 6935 | 3452 | 2289 | 1497 | 873 | 733 | |
| | NR | 7922 | 3608 | - | 1670 | - | 749 | |
| Geometry | | | | | | | | |
| h_{nom} [mm] ① ② | (187) | 161 (165) | 155 | 99 | 87 | 85 | | |
| b_{ch} [mm] | 64.0 | 52.5 | 40.0 | 38.0 | 29.0 | 41.3 | | |
| h_{ch} [mm] | 44.0 | 34.0 | 27.0 | 23.0 | 20.0 | 20.7 | | |
| I_y [mm ⁴] | 240300 | 92600 | 39000 | 21100 | 10200 | 12600 | | |
| h_{ef} [mm] | 178 | 155 | 148 | 82 | 128 | 82 | | |
| c_{min} [mm] | 125 | 100 | 75 | 75 | 50 | 50 | | |
| * Concrete load capacity has to be verified for each individual case (taking the geometric boundary conditions into account). | | | | | | | | |
| c_{min} = minimal spacing channel/concrete edge | $N^0_{Rd,s,l}$ = channel lip load capacity (tension) | ① Nominal size and tolerance | | | | ② weld-on I- or T-anchors subject to available stock; for these (h_{nom}) values are in brackets | | |
| NR = Stainless steel | $V^0_{Rd,s,l,y}$ = channel lip load capacity (perpendicular shear) | | | | | | | |
| s_{slb} = axial spacing for bolts for $N^0_{Rd,s,l}$ | $V_{Rd,s,l,x}$ = channel lip load capacity (longitudinal shear) | | | | | | | |

■ FV = Steel hot-dip galvanized
1.0038/1.0044

■ A4 =Stainless steel
1.4571/1.4404



All hot-rolled profiles are suitable for dynamic loads

HALFEN HZA CAST-IN CHANNELS

HALFEN HZA Channels: Standard lengths/HALFEN HZA Channels Curved Solution

HALFEN HZA Channels – Standard lengths


Standard lengths* - Length [mm] / Number of anchors

| | HZA 64/44; 53/34 | HZA-PS 64/44; 53/34 | HZA 41/27 | HZA 38/23 | HZA-PS 38/23 | HZA 29/20 | HZA-PS 29/20 | HZA 41/22 |
|--|---------------------|------------------------|--------------|--------------|-----------------|--------------|-----------------|--------------|
| This tables lists the standard lengths of cast-in channel in the HALFEN HZA Product range. Our standard lengths are optimized lengths to avoid cut-offs. Order numbers may be found in the current HALFEN price list. Other lengths are available on request. * please contact our technical support for more information | - | - | - | - | - | - | - | 100/2 |
| | 150/2 | - | 150/2 | 150/2 | - | 150/2 | - | 150/2 |
| | 200/2 | 200/2 | 200/2 | 200/2 | 200/2 | 200/2 | 200/2 | 200/2 |
| | 250/2 | - | 250/2 | 250/2 | - | 250/2 | - | 250/2 |
| | 300/2 | - | 300/2 | 300/2 | - | 300/3 | - | 300/2 |
| | 350/3 | 350/3 | 350/3 | 350/3 | 350/3 | 350/3 | 350/3 | 350/3 |
| | 400/3 | - | 400/3 | 400/3 | - | 400/3 | - | 400/3 |
| | 550/3 | 550/3 | 550/3 | 550/3 | 550/3 | 550/4 | 550/4 | 550/3 |
| | - | 800/4 | - | 800/4 | 800/4 | - | 800/5 | - |
| | 1050/5 | 1050/5 | 1050/5 | 1050/5 | 1050/5 | 1050/6 | 1050/6 | 1050/5 |
| | - | 3030/13 | - | 3030/13 | 3030/13 | 3030/16 | 3030/16 | - |
| | 6070/25 | 6070/25 | 6070/25 | 6070/25 | 6070/25 | 6070/31 | 6070/31 | 6070/25 |

We deliver HALFEN HZA Cast-in channels in any length from 100 mm to 6070 mm. Any number of anchors with individual spacing is possible. Please contact us at www.halfen.com or see the back inside cover of this catalogue for contact information.

The HALFEN Calculation program for HALFEN Cast-in channels according to the ETA provides the user with a convenient and very powerful calculation tool for any channel length, anchor spacing and concrete cover. Free download at [www.halfen.com/downloads/software-cad/...](http://www.halfen.com/downloads/software-cad/)

HALFEN HZA Channels curved solution

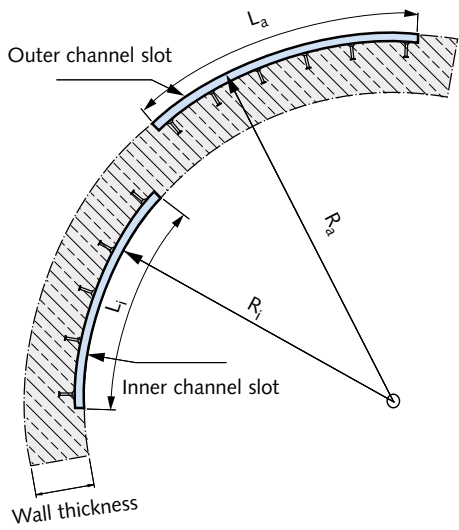

- Areas of application:**
- > tunnel construction
 - > reinforced concrete tunnels for utilities
 - > curved walls
 - > sewage plants



Curved HALFEN Cast-in channels in tunnel segments

Ordering example:
 HALFEN Cast-in channel, curved
 HZA-CS 53/34-Q - A4, $R_i = 4000$ mm, $L = 1050$ mm

| | | Smallest radius [m]* | | | | | |
|---------------------|----------|----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Profile | Material | HZA-CS 64/44 | HZA-CS 53/34 | HZA-CS 41/27 | HZA-CS 38/23 | HZA-CS 29/20 | HZA-CS 41/22 |
| Inner channel slot: | □ | on request | on request | on request | 2.60 m | 0.85 m | 0.70 m |
| | ■ | on request | on request | on request | 1.20 m | - | 0.70 m |
| Outer channel slot: | □ | on request | on request | on request | 1.40 m | 1.10 m | 2.20 m |
| | ■ | on request | on request | on request | 3.50 m | - | 4.80 m |

□ hot-dip galvanized ■ A4 stainless steel

* please contact our technical support for more information

R_i = Radius of inner channel slot
 R_a = Radius of outer channel slot
 L = Length of channel after bending (maximum 5400 mm)

HALFEN HZA CAST-IN CHANNELS

HALFEN HZS Bolts



Available HALFEN HZS Bolts



HALFEN Bolt, serrated

➤ The serration also ensures a positive load transmission in the longitudinal channel direction. The danger of bolt slippage is minimized.

➤ The bolt is marked on the shaft end with 2 notches.

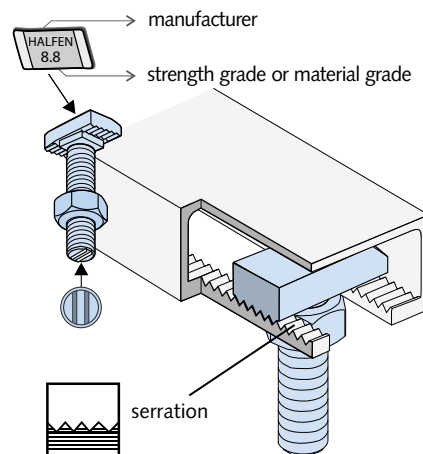

HALFEN HZS Bolts

| Bolt | HZS 64/44 | | HZS 53/34 | | HZS 38/23 | | HZS 29/20 | HZS 41/22 | |
|----------------------|-----------------------------|-------------------|---------------------------|---------------------------|------------------|---------------------------|------------------|----------------|----------------|
| Suitable for profile | 64/44 | | 53/34 | | 41/27; 38/23 | | 29/20 | 41/22 | |
| Bolts dimensions | | | | | | | | | |
| ∅ | M20 | M24 | M16 | M20 | M12 | M16 | M12 | M12 | M16 |
| l [mm] | | | | | | | | | |
| 30 | - | - | - | - | GVs8.8 | - | GVs8.8 | - | - |
| 35 | - | - | - | - | - | - | - | A4-50 FV8.8 | - |
| 40 | - | - | - | - | GVs8.8 | GVs8.8 | GVs8.8 | - | - |
| 50 | - | - | - | - | FV8.8* GVs8.8 | GVs8.8 | FV8.8* GVs8.8 | A4-50 FV8.8 | A4-50 FV8.8 |
| 60 | - | - | A4-70 FV8.8* GVs8.8 | - | GVs8.8 | A4-70 FV8.8 GVs8.8 | GVs8.8 | - | - |
| 65 | - | - | - | FV8.8* A4-70 GVs8.8 | - | - | - | - | - |
| 80 | A4-70* FV8.8* GVs8.8* | A4-70* GVs8.8* | FV8.8* | FV8.8* | GVs8.8 | A4-70 FV8.8* GVs8.8 | GVs8.8 | A4-50 | - |
| 100 | - | FV8.8* | A4-70 FV8.8* GVs8.8 | A4-70 GVs8.8 | GVs8.8 | GVs8.8 | - | - | FV8.8 |
| 125 | A4-70* GVs8.8* | - | - | - | - | - | - | - | - |
| 150 | - | A4-70* GVs8.8* | - | - | - | GVs8.8 | - | - | - |


*on request

HALFEN HZA CAST-IN CHANNELS

HALFEN Bolts: Dimensioning

HALFEN HZS Bolts — Load capacity and bending moment


Design resistance HZS with hot-rolled HZA DYNAGRIP® Cast-in channels



DYNAGRIP®
 HZA 64/44; HZA 53/34; HZA 41/27;
 HZA 38/23; HZA 29/20

| Material/Strength class | | M12 | M16 | M20 | M24 |
|-------------------------|---------------------|------|-------|-------|-------|
| 8.8 | $N_{Rd,s,s}$ [kN] | 44.9 | 83.7 | 130.7 | 188.3 |
| | $V_{Rd,s,s}$ [kN] | 27.0 | 50.2 | 78.4 | 113.0 |
| | $M^0_{Rd,s,s}$ [Nm] | 84.0 | 212.8 | 415.2 | 718.4 |
| A4-70 | $N_{Rd,s,s}$ [kN] | 31.6 | 58.8 | 91.7 | 132.1 |
| | $V_{Rd,s,s}$ [kN] | 22.7 | 42.2 | 66.0 | 95.1 |
| | $M^0_{Rd,s,s}$ [Nm] | 59.0 | 149.4 | 291.0 | 503.8 |

Design resistance HZS with cold-rolled HZA Cast-in channels




HZA 41/22

| Material/Strength class | | M12 | M16 |
|-------------------------|---------------------|------|-------|
| 8.8 | $N_{Rd,s,s}$ [kN] | 32.3 | 62.2 |
| | $V_{Rd,s,s}$ [kN] | 27.0 | 50.2 |
| | $M^0_{Rd,s,s}$ [Nm] | 84.0 | 208.8 |
| A4-50 | $N_{Rd,s,s}$ [kN] | 14.1 | 22.4 |
| | $V_{Rd,s,s}$ [kN] | 10.6 | 19.8 |
| | $M^0_{Rd,s,s}$ [Nm] | 27.7 | 70.2 |

Torque values for HALFEN HZS Bolts

Standard


Components are braced against the concrete and anchor channel.
 Torque is applied as in the following table and must not be exceeded.

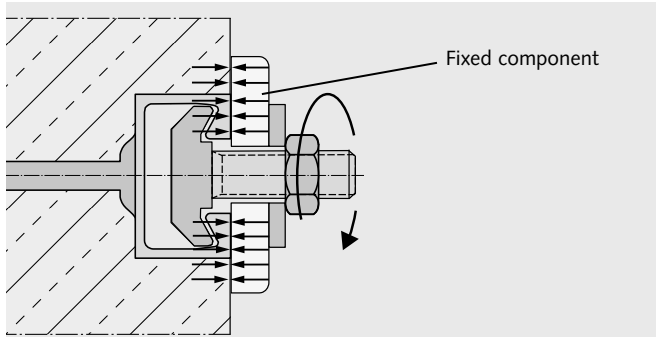

Standard torque values

Steel-Steel

Components are braced against the anchor channels using suitable washers.
 Torque is applied as in the following table and must not be exceeded.

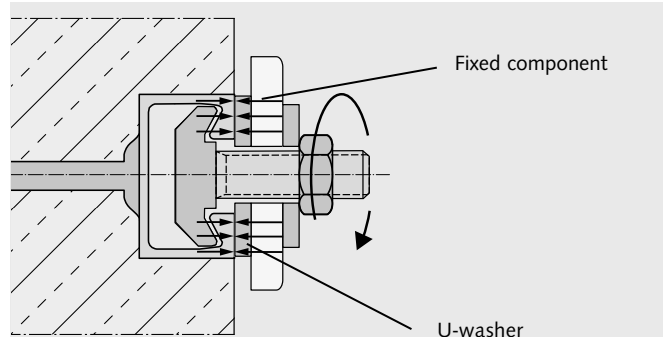

Torque values steel-steel

Standard: Recommended torque values T_{inst}

| HZA Profile | HALFEN Bolt HZS...M [mm] | Torque value T_{inst} [Nm] | | |
|-------------|--------------------------|------------------------------|-----------------------------------|-----------------------------------|
| | | Steel 8.8 | Stainless steel Strength class 50 | Stainless steel Strength class 70 |
| 41/22 | 12 | 30 | 20 | - |
| | 16 | 40 | 50 | - |
| 29/20 | 12 | 35 | - | - |
| 38/23 | 12 | 55 | - | 50 |
| | 16 | 75 | - | 75 |
| 41/27 | 12 | 75 | - | - |
| | 16 | 125 | - | - |
| 53/34 | 16 | 135 | - | 130 |
| | 20 | 165 | - | 165 |
| 64/44 | 20 | 315 | - | 250 |
| | 24 | 375 | - | 335 |

Steel-Steel: Recommended torque values T_{inst}

| HZA Profile | HALFEN Bolt HZS...M [mm] | Torque value T_{inst} [Nm] | | |
|-------------|--------------------------|------------------------------|-----------------------------------|-----------------------------------|
| | | Steel 8.8 | Stainless steel Strength class 50 | Stainless steel Strength class 70 |
| 41/22 | 12 | 50 | 20 | - |
| | 16 | 140 | 50 | - |
| 29/20 | 12 | 75 | - | - |
| 38/23 | 12 | 75 | - | 50 |
| | 16 | 185 | - | 130 |
| 41/27 | 12 | 75 | - | - |
| | 16 | 185 | - | - |
| 53/34 | 16 | 185 | - | 130 |
| | 20 | 360 | - | 250 |
| 64/44 | 20 | 360 | - | 250 |
| | 24 | 625 | - | 435 |

Torque values apply only for bolts in delivery condition (unlubricated).

HALFEN HZA CAST-IN CHANNELS

Minimum edge distances and minimum bolt spacing

Minimum edge distances and minimum bolt spacing

Anchors must be installed at a minimum distance from the component edges. The distance depends on the selected channel profile. According to the ETA, the spacing between bolts s_{cbo} must not be less than $5 \times d_s$. Reduction of the load bearing capacity is required if $s_{cbo} < s_{sl,N}^*$ (see table on page 29).

The concrete load-bearing capacity must be verified for each individual case using the HALFEN Anchor channel Software!

* $s_{sl,N}$ = centre distance of the bolts
subject to $N_{Rd,s,l}$
See tables on page 29

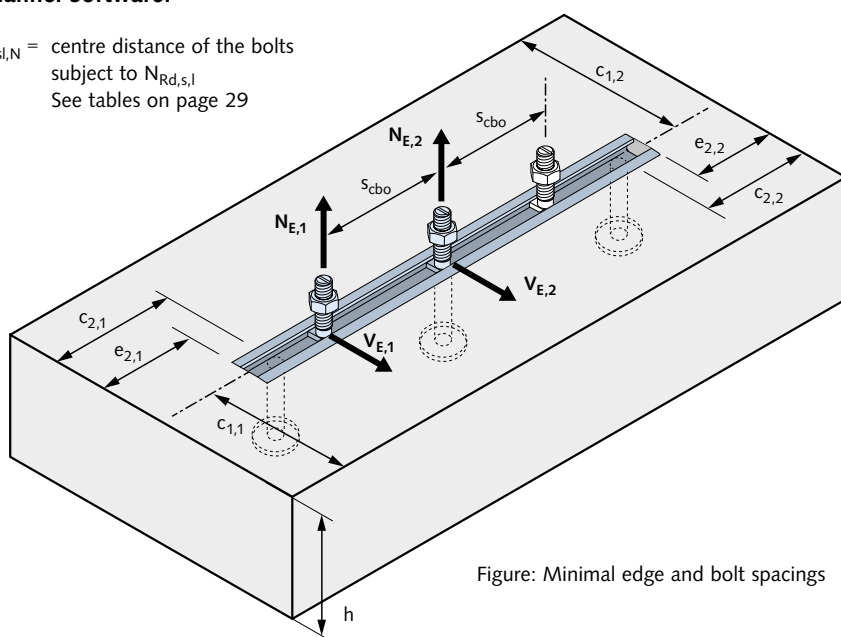


Figure: Minimal edge and bolt spacings

| Edge and bolt spacing [mm] | | | | |
|----------------------------|----|-------------|-----------|-----------|
| HZA Profiles | M | $s_{s,min}$ | c_{min} | e_{min} |
| 64/44 | 24 | 120 | 125 | 90 |
| | 20 | 100 | | |
| 53/34 | 20 | 100 | 100 | 65 |
| | 16 | 80 | | |
| 41/27 | 16 | 80 | 75 | 40 |
| | 12 | 60 | | |
| 38/23 | 16 | 80 | 75 | 47 |
| | 12 | 60 | | |
| 29/20 | 10 | 50 | 50 | 22 |
| 41/22 | 16 | 80 | 50 | 22 |
| | 12 | 60 | | |

HALFEN HTA-CE/HZA CAST-IN CHANNELS

Installation aids/Further channel parts

ANK-E end anchor; for on-site custom cut-length of HALFEN Cast-in channels


Notes for assembling end anchor, type ANK-E

- Cut the HALFEN Cast-in channel at the selected point. The cut face must be at a right angle to the longitudinal axis of the channel. The end projection "e" should not be less than 35 mm and not more than 175 (225) mm*.
- Select the correct **ANK-E** End anchor for the HALFEN Cast-in channel profile; see table on the right. Slide the clamping element on to the back of the channel. If necessary, push in the foam filler at the end of the channel.
- Tighten the bolt by applying the required torque. See table (right) for correct torque value.


| End anchor selection | | | |
|----------------------|-------------|--------|-------------------------------|
| for profile | End anchor | Thread | Torque T _{inst} [Nm] |
| 28/15 - FV | ANK-E1 - FV | M8 | 10 |
| 28/15 - A4 | ANK-E1 - A4 | M8 | 10 |
| 38/17 - FV | ANK-E2 - FV | M10 | 20 |
| 40/25 - FV | | | |
| 41/22 - FV ① | | | |
| 38/17 - A4 | ANK-E2 - A4 | M10 | 20 |
| 40/25 - A4 | | | |
| 41/22 - A4 ① | | | |

① Short HZA 41/22 sections may be used with one end anchor only. Not included in the ETA.

Custom lengths

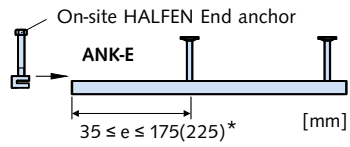

* 175: for 28/15, 38/17
225: for 40/25, 41/22

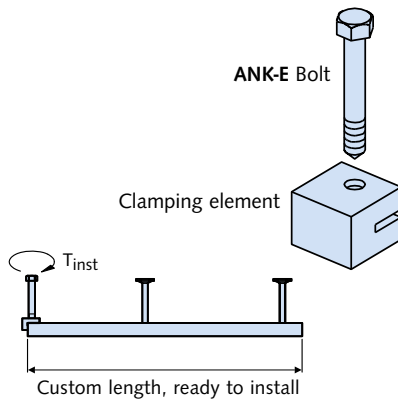

HALFEN Channel pairs

Material/type:

Channel (Type straight or curved):

FV = Hot-dip galvanized

A4 = Stainless steel


Spacer:

Reinforcement steel B500B or

B500B/A NR, Ø 10-16 mm

Recommended for stainless steel

type spacers in: B500B/A NR.

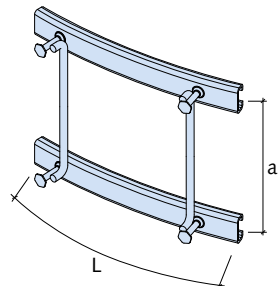

Ordering example:

Type: HALFEN Channel pair HTA-CE 38/17

Dimensions: L = 350 mm, a = 200 mm

Material: hot-dip galvanized, with filler

Radius: R_i = ... (for curved type)

HALFEN Corner channel

Material/type:

Channel and anchor:

FV = Hot-dip galvanized

A4 = Stainless steel

Standard type:

a/b = 125/250 mm

Other lengths for a and b

and other profiles are

available on request

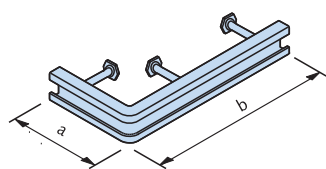


Figure: HTA-CE 38/17 – Corner piece

Area of application:

- fixing for HALFEN Console anchors for supporting brickwork cladding
- other near edge fixings

HALFEN HTA-CE/HZA CAST-IN CHANNELS Installation in pre-stressed concrete

HALFEN Anchor channels, hot-dip galvanized with stainless steel anchors

Requirements

according to EN 1992-1-1/NA (EC 2 with German National Annex, 2nd edition, 2016, chapter 8.10.1.1) *"Ensure at least 20mm concrete between pre-stressed tension strands and galvanized components."* Otherwise there is a risk of hydrogen induced cracking.

Solution




If hot-dip galvanized channels are used together with stainless steel bolt anchors then the pre-stressed tension-strands are allowed to have contact with the stainless steel bolt anchor.

Types:

Lengths available: up to 6.07 m

Available profiles:

- > 50/30P
- > 49/30
- > 40/25
- > 38/17

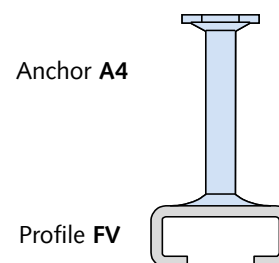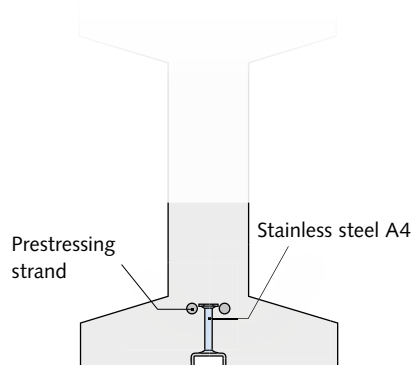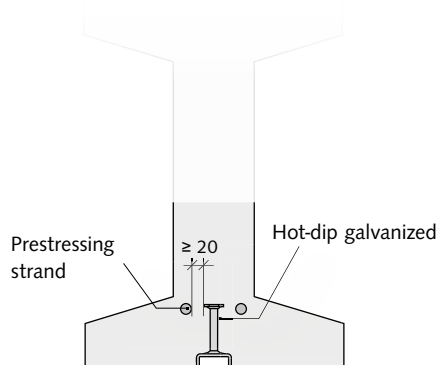

HALFEN HTA-CE/HZA CAST-IN CHANNELS Installation/Assembly

1.1 Delivery and identification

We can supply ready to install short channels and standard lengths.

Product identification

- ① inside the channel
- ② also on the channel side

1.2 Installing to formwork

If required, HALFEN Cast-in channels can also be cut to size on site.

2.1 Fixing to the formwork

Timber formwork

2.1.1 with nails

2.1.2 with staples

Steel formwork

2.1.3 aluminium rivets

2.1.4 HALFEN Bolt and nut

2.1 Fixing to the formwork, continued

Steel formwork

2.1.5 HALFEN HFK Fixing cone

2.2 Top face installation

2.2.1 directly to reinforcement: with tying wire

2.2.2 directly to reinforcement: with HALFEN HCP ChanClip



2.2.3 Installation using an auxiliary aid



HALFEN HTA-CE/HZA CAST-IN CHANNELS Installation/Assembly

3.1 Removing the filler


Strip filler, available in two versions:



KF – PE strip filler
with reinforcement layer




KF – PE strip filler

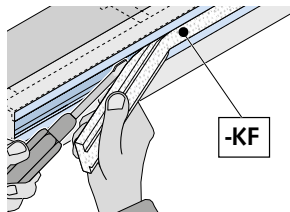

Removing the strip filler

Grip the strip filler at one end and pull out in one piece by hand; use a tool, e.g. a screwdriver.

4.1 Installing HALFEN Bolts

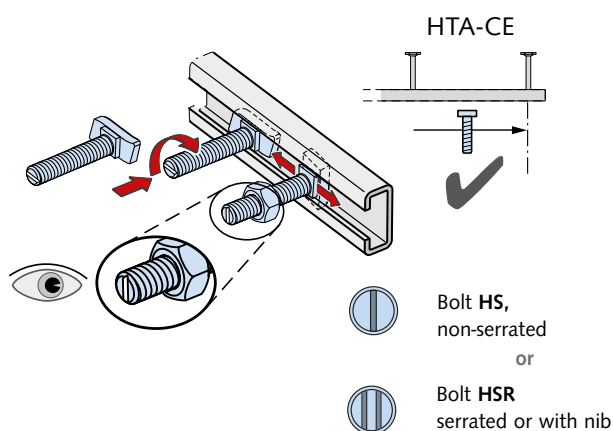


Safe assembly with HALFEN Cast-in channels

HALFEN Bolts can be inserted anywhere in the channel slot, turned 90° and then locked in place by tightening the nut. Do not position bolts at channel ends past the last anchor. On channels with bolt anchors, the anchor locations are visible through the channel slot.

Check


Bolts: After installation check that the bolts are properly aligned; the notch or notches in the tip of the shank must be at right angles to the longitudinal axis of the channel.

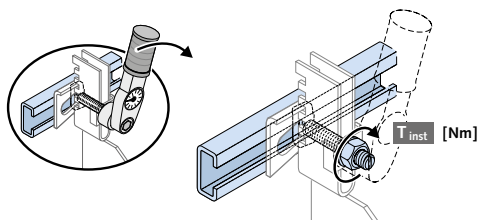


Fixings

The bolt heads must sit flush on both lips of the anchor channel and be secured by tightening the nut with a torque wrench with the required value. Observe the torque values in the tables on page 24 or 32.

Direct attachment ①




Surface-flush installation

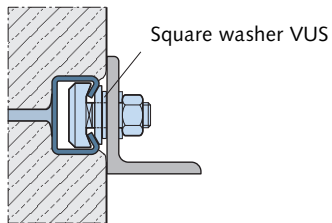

Non-flush installation

- ① If the front surface of the channel is set back from the concrete surface, the attached structure must be shimmed with a washer (VUS). In case of shear stress, add bolt flexure to the tensile force.

Stand-off installation ②

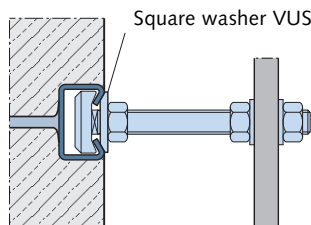

- ② Always install a square washer for stand-off installations.

Example:

HALFEN Channel: **HTA-CE 49/30**
HALFEN Bolt: **HS 50/30 - M16**
Washer: **VUS 49/30 - M16**



Assembly instructions on the internet

Multi-language assembly instructions can be found at www.halfen.com ▷ Brochures ▷ Installation Instructions. Or scan the code and select the required document.

HGB HANDRAIL CONNECTIONS

The benefits at a glance

Construction specialists consider the HALFEN HGB Handrail connections to be particularly suited for fastening railings and banisters to the thin front faces of balcony slabs



Safe and reliable

- › statically verified installation
- › no damage to visible surfaces of concrete slabs
- › also suitable to secure mandatory safety rails during construction (Refer to: EN 795 "Guard rails")
- › use with HALFEN high-strength bolts to ensure a reliable and statically sound connection of railing/banister components

Fast and cost-effective

- › adjustable anchorage
- › can also be used in slabs as thin as $h \geq 100$ mm
- › installed with bolts instead of welding or drilling
- › pre-planning reduces on-site construction time
- › all attached components remain fully adjustable or are easily replaced as required



HALFEN HGB HANDRAIL CONNECTIONS

Application examples

SAFETY BARRIERS IN STADIUMS



①-④: Safety barrier installation, multi purpose arena in Berlin



Fixing of safety rails, Rheinenergiestadion Cologne



Fixing of safety rails, Rheinenergiestadion Cologne

RAILINGS



Used to secure safety rails during the construction phase



Cast-in HGB Channel, residential building

HALFEN HGB HANDRAIL CONNECTION

General

Regulatory requirements

Balconies are part of the structural system. *"They must be designed, constructed, maintained and modified in such a fashion that public order and safety, especially to health or life, is not endangered"*. Model building code and construction guidelines (*Musterbauordnung MBO 2020 und Ausführungsvorschriften*).

Technical guidelines issued by public notice as technical building regulations must be observed.* Technical rules provide information on load parameters, calculation, dimensioning of structural

products, construction types, structural layouts etc. A requirement of regional building codes refers to structural stability: *"All structures must, as a whole and in their individual components, be structurally self-supporting"*. This stability must be statically verifiable based on current technical standards.

A further building regulation addresses traffic loads, for example: Balconies and loggias must be fitted with safety rails to prevent falls when they border on to an area with a drop of more than one metre. For a drop height up to 12 m

the minimum railing height is 0.90m measured from the upper surface of the finished floor surface or accessible ledge. For drop heights greater than 12m the banister height must be at least 1.10m. For exceptions see the German federal building regulations/Deutsche LandesBauOrdnung.

Other regulations, not covered here, address the design, dimensioning, required spacings in the guard rail design, fire protection, thermal/sound insulation and rainwater drainage.

* issued by the highest construction supervision authorities of the German Federal States

Regulations, standards and directives (to be observed when designing safety rails)

Regional Building Codes



Individual regional states have their own building codes and regulations. All current technical regulations require proof of structural safety and integrity. A static calculation or a building authority certificate is required when designing and dimensioning the fixings for guard rails.

VOB – Part B, § 4, execution of construction:



§ 4.2 (1) It is the contractor's responsibility to provide the static documentation in accordance with the contract. He has to observe the recognized standards of practice as well as with the provisions of the law and regulatory directives. Tender and Contract Regulations for the German building industry (*VOB Vergabe- und Vertragsordnung für Bauleistungen*) Part B, § 4.3, requires the contractor to report to the customer, in writing, any obvious design flaws, which he as the expert must be able to recognize. He alone is responsible for any resulting defect and consequential expenses. If he has satisfied his reporting obligation, the responsibility for the defect passes to the customer (defect example: banister attachment mounted in a concrete slab which is too thin).

BVM Directive

Directive on metal railings/banisters/balustrades, published by Federal Association of German Metalworkers (*BVM Berufsverband Metall*).

- Accident Prevention Regulation "General Provisions" (DGUV Regulation 1)
- Industrial Safety Regulations
- ETB – Directive "Fall Prevention Installations", Publ. 1985
- Stainless Steels, EC3 part 1-4

Other applicable regulations and standards (Extract):



- EN 1992-1-1 (EC2): Design and construction of concrete support structures; with National Annex (NA)
- EN 1991 (EC1): General effects on load structures; with National Annex (NA)
- EN 1993 (EC3): design and construction of steel structures; with National Annex (NA)

HALFEN HGB HANDRAIL CONNECTION

Materials/Corrosion Protection

Stainless Steel A4:

Chromium is the most important alloy element in stainless steel. A specific chromium concentration ensures the generation of a passive layer on the surface of the steel that protects the base material against corrosion. This explains the high corrosion resistance of stainless steel.



"Anchor channels in stainless steel may be used outdoors – also in an industrial and coastal environment, but may not be directly exposed to salt water".

See guidelines for "Metal railings, banisters and balustrades" issued by the German Association of Metalworkers (BVM Bundesverband der Metallverarbeiter).

HALFEN Cast-in channels, stainless steel

| Description | Stainless steel | | |
|--------------------|--|-----------|--|
| | Materials | Standard | Corrosion resistance class according to EN 1993-1-4, table A.3 |
| Channel profile | 1.4404 or 1.4571 ■ | EN 10 088 | III |
| Ribbed-head anchor | Reinforcing steel B500B □ Reinforcing steel BSt 500NR ■ | DIN 488 | |

HALFEN Bolts, stainless steel

| Description | Stainless steel | | |
|---------------|--|----------------------------|--|
| | Materials | Standard | Corrosion resistance class according to EN 1993-1-4, table A.3 |
| Bolt | A4-70: 1.4404 or 1.4571 ■ | EN 3506-1 and EN 10 088 | III |
| Hexagonal nut | A4-70: 1.4404 or 1.4571 ■ | EN 3506-2 and EN 10 088 | III |
| Washer | 1.4404 or 1.4571 ■ | EN 10 088 | III |

□ WB = Steel mill finish

■ A4 = Stainless steel

Available on request:



Galvanized material for interior, dry rooms, for instance when installing staircase railings and banisters in residential buildings, schools or commercial retail stores.

Hot-dip galvanized FV:

Dipped in a galvanizing bath, with a temperature of approx. 460 °C; this method will primarily be used for your requested channels and bolts.



Identification of HALFEN HGB Cast-in channels

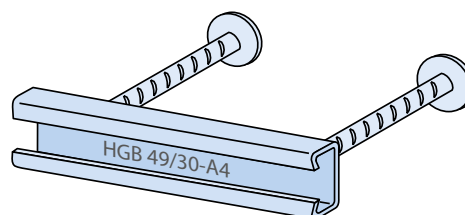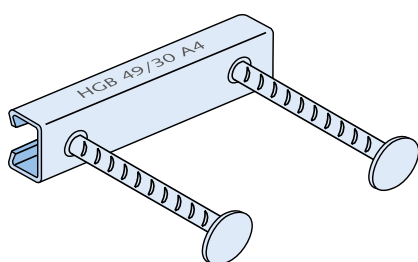

Product identification

- > on channel side
- > additionally inside the profile

HALFEN HGB HANDRAIL CONNECTION


Product Range

| HALFEN HGB Cast-in channels and bolts | | | | | | | | | | |
|---|-----------------------|----------------|----------------|------------------|---------------------------------|----------------|----------------|------------------|-------------------|------------|
| Item description | Dimensions HGB-E [mm] | | | | Dimensions HGB-EE [mm] | | | | HALFEN HS Bolts | |
| | | | | | | | | | | |
| | l | d _A | h _A | Weight kg/each G | l ₁ / l ₂ | d _A | h _A | Weight kg/each G | Type / FK | Dimensions |
| HGB E - 54/33-A4 ■ | 100 | 14 | 200 | 1.071 | 170/170 | 14 | 250 | 2.262 | HS-50/30 A4-70 | M12×40 |
| | 150 | | | 1.307 | | | | | | M16×50 |
| | 200 | | | 1.543 | | | | | | |
| HGB E - 49/30-A4 ■ | 100 | 12 | 110 | 0.704 | 170/170 | 14 | 150 | 1.501 | HS-50/30 A4-70 | M12×40 |
| | 150 | | | 0.855 | | | | | | M16×50 |
| | 200 | | | 1.007 | | | | | | |
| HGB E - 40/25-A4 ■ | 100 | 10 | 90 | 0.611 | 170/170 | 14 | 90 | 1.042 | HS-40/22 A4-70 | M12×40 |
| | 150 | | | 0.717 | | | | | | M16×40 |
| | 200 | | | 0.822 | | | | | | |
| HGB E - 38/17-A4 ■ | 100 | 10 | 201 | 0.824 | 170/170 | 12 | 201 | 1.214 | HS-38/17 A4-70 | M12×40 |
| | 150 | | | 0.911 | | | | | | M16×40 |
| | 200 | | | 0.999 | | | | | | |


■ A4=Stainless steel 1.4571/1.4404 Alternative for interior use (on request) ■ FV=Steel hot-dip galvanized 1.0038/1.0044

Ordering and materials

Ordering example HGB channel:

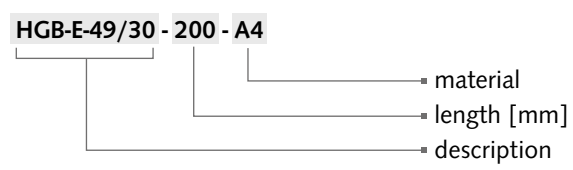


Ordering example HALFEN Bolt:

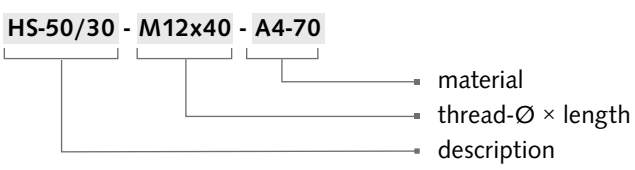

HALFEN HGB HANDRAIL CONNECTION Installation/Assembly

1 Nail the HALFEN Cast-in channel to the formwork

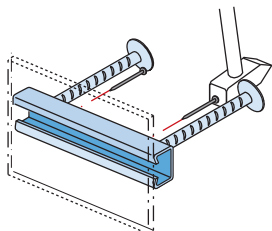


Where possible, use stainless steel nails to avoid corrosion.
After striking the formwork remove the foam filler from the HALFEN Cast-in channels.




Nail the HALFEN Cast-in channel to the formwork

2 Installation and adjustment of balustrades

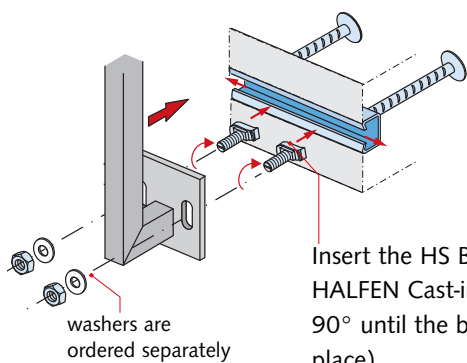

Insert the HS Bolts into the HALFEN Cast-in channel (turn 90° until the bolt locks into place).
washers are ordered separately

3 Tighten the bolts




Tighten the nuts using a torque wrench. See table on the right for torque values

Railing bolts


| Stainless steel Material grade A4-70 | Torque [Nm] | |
|--|-------------|-----|
| | M16 | M12 |
| HS 50/30 for profile 49/30 and 54/33 | 60 | 25 |
| HS 40/22 for profile 40/25 | 45 | 25 |
| HS 38/17 for profile 38/17 | 40 | 25 |

Fixing position of the bolts

Short piece

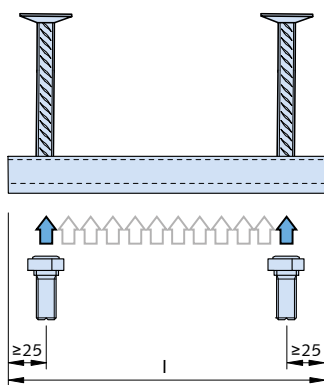

Corner piece (on request)

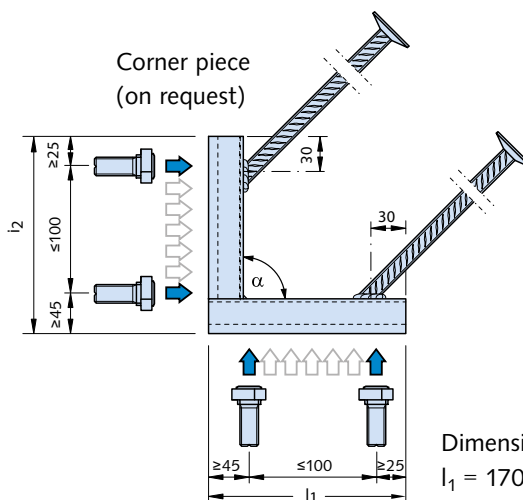

Dimensions [mm]:
 $l_1 = 170$, $l_2 = 170$, $\alpha = 90^\circ$

HALFEN HGB HANDRAIL CONNECTION

Dimensioning Fundamentals

Railing height

The minimum height h_b of a railing is 0.90 m from the top surface of the finished floor or accessible ledge to the upper edge of the rail. For drop heights of more than 12.0 m the railing must be at least 1.10 m in height. (Exceptions; as specified in regional building codes)

It would be advisable to have one uniform minimum height of 1.00 m as has already been mandated in the commercial sector and in a number of European countries.


Balcony slab

Anchor channels or dowel installations require concrete of at least C 20/25 grade. A case-by-case decision must be made if the concrete grade is less than C 20/25 grade or is unknown.


The thickness of the balcony slab must be at least $h = 100-150$ mm when the HGB is cast in the slab edge (depends on channel profile and according to the German HGB approval). Other types of installation and systems require a thicker slab. All weather-exposed concrete-embedded installations (e.g. for balconies) must be made of stainless steel.

Spacings

Any structural design must take all basic requirements for railings and banisters into account. As a general rule, all railings and banisters must be designed so that personal injury is ruled out, for instance with correct spacing of rails, lattice bars or panels. They should also be designed so as not to entice but instead to discourage anyone from climbing over. The specific requirements for guard rail design are determined by the intended use (residential, public, commercial) and the drop height involved. Also observe the building codes of each country or region, the ETB guidelines "Fall Protection Components" and DIN 18065 (Stairs in Buildings – definition, rules, key measurements) and guard rail regulation applicable at the construction site. In Germany these are the Guardrail regulations 2020 set by the German Association of Metalworkers, ("Geländer-Richtlinie 2020, BVM Berufsverband Metall").

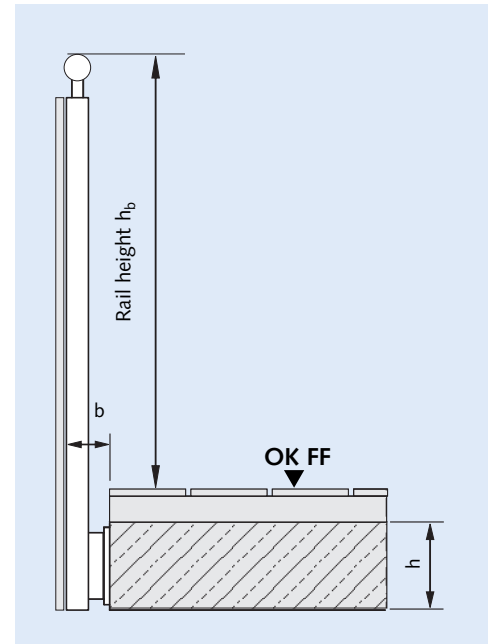

b = clear distance between the back of the balcony cladding and the front face of the balcony slab or gutter / kick plate

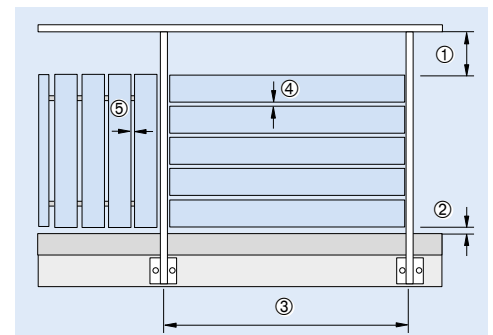

- ① clear distance between bottom edge of hand rail and top edge of facing / lower structure
- ② clear distance between the top edge of the finished floor and the bottom edge of the facing lower structure
- ③ axis spacing between posts
- ④ clear distance between horizontal facings
- ⑤ clear distance between vertical facings

HALFEN HGB HANDRAIL CONNECTION

Dimensioning

Dimensions

The forces acting on the railing must be transferred into the main building structure. It is necessary to verify that the forces


- are wholly supported by the railing and
- can be transferred via the connecting elements into the balcony slab.

$$N_{Ed} = \frac{M_{Ed}}{(e - 0.41 \cdot x)} + H_{Ed}$$

N_{Ed} = tensile force on the anchor

e = distance between channel axis and outer edge of the railing base plate

x = maximum concrete pressure zone level according to annex 8, table 8a and 8b

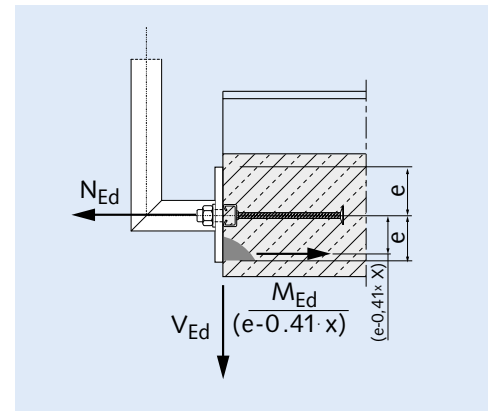

Railing heights

| Drop height | Minimum height of rails (recommended) | Note |
|-------------------|---------------------------------------|--|
| Less than 12 m | 90 cm (100 cm) | Relevant regional building regulations and if necessary other regulations e.g. for civil constructions must be observed. |
| Greater than 12 m | 110 cm | |

Calculation

1. Railing/banister load h according to EN 1991-1-1/NA Table 6.12 DE

"Calculation must assume 100% traffic load in drop direction and 50% of traffic load (but not less than 0.5 kN/m) in the opposite direction."



| | |
|---|--------------------------|
| for example: residential buildings and communal areas with low foot traffic | $q_k = 0.5 \text{ kN/m}$ |
| for example: rooms for mass assembly, commercial sales spaces, corridors | $q_k = 1.0 \text{ kN/m}$ |
| for example: areas for large gatherings of people, factories, workshops | $q_k = 2.0 \text{ kN/m}$ |

2. Vertical loads v according to BVM* guidelines

Load assumptions to calculate vertical loads are according to the BVM guidelines for guard rails/banisters.



| | |
|---|---------------------------|
| from dead weight of structure including any renders | $v_1 = 0.40 \text{ kN/m}$ |
| from window box | $v_2 = 0.35 \text{ kN/m}$ |
| support capacity | $v_3 = 0.15 \text{ kN/m}$ |

3. Wind loads

F_w according to EN 1991-1-4 and EN 1991-1-4/NA



| |
|--|
| Velocity force q in kN/m^2 and total wind pressure F_w are calculated according to EN 1991-1-4 with EN 1991-1-4/NA. |
|--|

*German Association of Metalworkers (BVM Bundesverband der Metallverarbeiter)

HALFEN HGB HANDRAIL CONNECTION

Dimensioning

Extract from HGB approval Z-21.4-1912, page 6

3.2.2 Actions and required verifications

The actions H_{Ed} , V_{Ed} , M_{Ed} and N_{Ed} have to be determined according to the calculation basics as in annex 7. The ratio in the design calculation between horizontal action and bending moment is limited to:

$$\frac{H_{Ed}}{M_{Ed}} \leq 1.5 [1/m] \quad H_{Ed} \text{ [kN]}; M_{Ed} \text{ in [kNm]}$$

It has to be verified that the design action value E_d does not exceed the design resistance value R_d :

$$E_d \leq R_d \quad \text{see table 3.1 and 3.2 below}$$

E_d = Design action value (N_{Ed} , V_{Ed} , M_{Ed})
 R_d = Design resistance value (N_{Rd} , V_{Rd} , M_{Rd})

For a standard case the following equation for the design action value applies (permanent load and variable load acting in the same direction):

$$E_d = \gamma_G \cdot G_k + \gamma_Q \cdot Q_k$$

G_k, Q_k = characteristic value of permanent load or variable load according to recognized standards for load assumptions
 γ_G, γ_Q = partial safety factors for permanent and variable action

Extract from HGB approval no. Z-21.4-1912, page 7

Table 3.1 Required verifications for tensile loads

| | |
|--|---|
| Steel failure | $N_{Ed} \leq N_{Rd,s}$ $\leq N_{Rd,s,s} \text{ (for single-bolt fixing)}$ $\leq 2 N_{Rd,s,s} \text{ (for two-bolt fixing)}$ |
| Pull out failure | |
| Concrete failure with anchor reinforcement | |
| Spalling | |

Table 3.2 Required verifications for shear loads

| | |
|---|---|
| Steel failure | $V_{Ed} \leq V_{Rd,s}$ $\leq V_{Rd,s,s} \text{ (for single-bolt fixing)}$ $\leq 2 V_{Rd,s,s} \text{ (for two-bolt fixing)}$ |
| Concrete failure with anchor reinforcement | |
| Concrete edge failure with anchor reinforcement | $V_{Ed} \leq V_{Rd,c}$ |
| | $M_{Ed} \leq M_{Rd,c}$ |

With combined loads the following interactions must be verified:

- $$\max. (N_{Ed} / N_{Rd,s})^2 + \max. (V_{Ed} / V_{Rd,s})^2 \leq 1.0$$




or

$$\max. (N_{Ed} / N_{Rd,s}) + \max. (V_{Ed} / V_{Rd,s}) \leq 1.2$$
- $$M_{Ed} / M_{Rd,c} + 1.5 V_{Ed} / V_{Rd,c} \leq 1.5 \quad \text{for } 0.333 \leq V_{Ed} / V_{Rd,c} \leq 1.0$$

HALFEN HGB HANDRAIL CONNECTION

Dimensioning

Extract from HGB-approval no. Z-21.4-1912, annex 6

| Table 6: Installation and anchor parameters | | | | | |
|---|---|--------------------------|----------------|----------------|----------------|
| Description | Illustration | Anchor channels profiles | | | |
| | | 38/17 | 40/22 40/25 | 50/30 49/30 | 52/34 54/33 |
| A) Profile shape and bolt positioning | | | | | |
| Minimum channel length required for a two-bolt fixing [mm] | annex 2 | 150 | 150 | 150 | 150 |
| Minimum bolt distance p [mm] | see next page | 80 | 80 | 80 (100) ① | 80 (100) ① |
| B) Building element dimensions and anchor position in the element | | | | | |
| Minimum thickness of concrete element h [mm] | annex 8 | 100 | 120 | 140 | 150 |
| Minimum edge distance c_1 [mm] (channel axis to the upper and the lower edge of the concrete element) | annex 8 | 50 | 60 | 70 | 75 |
| Minimum distance a_e [mm] to edge of concrete element (from end of channel) | see next page | 40 | 45 | 50 | 50 |
| C) Size and position of anchor plate | | | | | |
| Minimum distance e [mm] from the channel axis to the upper and the lower edge of the anchor plate |  | 30 | 30 | 35 | 37.5 |
| Minimum distance a_1 [mm] from the upper and lower edge of the anchor plate to the upper and lower edge of the concrete element ② |  | 10 | 10 | 10 | 10 |
| Minimum distance a_2 [mm] from the outer edge of the anchor plate to the edge of the concrete element |  | 40 | 45 | 45 | 45 |
| ① The values in brackets apply when using M20 bolts | | | | | |
| ② In components with a weather groove, the bottom of the groove is regarded as the concrete element edge | | | | | |

HALFEN HGB HANDRAIL CONNECTION

Dimensioning


Extract; HGB approval no. Z-21.4-1912, annex 6

Table 7: Size and position of required minimum reinforcement

| Description | Anchor channels | | | |
|---------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|
| | 38/17 | 40/25 | 49/30 | 54/33 |
| Stirrup / Quantity | 3 Ø 8 l _b = 200 mm | 3 Ø 8 l _b = 250 mm | 3 Ø 10 l _b = 300 mm | 3 Ø 12 l _b = 400 mm |
| Edge rebar, top and bottom [mm] | Ø 8 | Ø 8 | Ø 10 | Ø 12 |

Required minimum reinforcement:

One stirrup is placed centrally between the channel anchors and one stirrup directly next to each anchor at the channel ends (if positioned near to the edge, between the anchor and component edge).

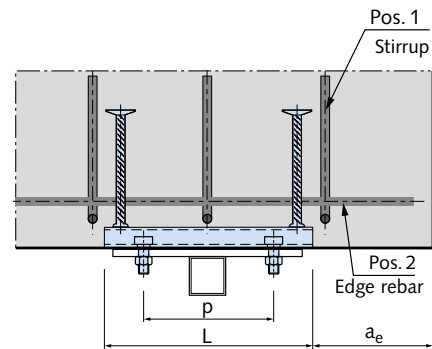

Extract; HGB approval no. Z-21.4-1912, annex 8

Table 9: Design resistance for each bolt

| Tensile | | | | |
|--------------------------|------------|------|------|-------|
| Bolts Ø | | M12 | M16 | M20 |
| N _{Rd,s,s} [kN] | 4.6 | 16.9 | 31.4 | 49.0 |
| | 8.8 | 44.9 | 83.7 | 130.7 |
| | A4-, HC-50 | 14.8 | 27.4 | 42.8 |
| | A4-70* | 31.6 | 58.8 | 91.7 |
| Shear | | | | |
| V _{Rd,s,s} [kN] | 4.6 | 12.1 | 22.6 | 35.2 |
| | 8.8 | 27.0 | 50.2 | 78.4 |
| | A4-, HC-50 | 10.6 | 19.8 | 30.9 |
| | A4-70* | 22.7 | 42.2 | 66.0 |

* Values also apply for all stainless steels of strength class 70 (see also HGB approval, annex 4)

Design resistance of concrete pressure zone

$$M_{Rd,c} = 0.81 \cdot x \cdot b \cdot \frac{f_{ck}}{\gamma_{Mc}} (e - 0.41 \cdot x)$$

where:

- x = maximum height; concrete pressure zone (see table 8a and 8b)
 - b = width of pressure zone = width of anchor plate b_p
 - f_{ck} = characteristic compression strength of concrete in accordance with EN 206-1:2001-07, for concrete strength ≥ C30/37 only calculate using f_{ck} = 30 N/mm²
 - e = distance between anchor channel axis and outer edge of the anchor plate (see illustration on page 49, table 8)
- γ_{Mc} = 1.5 (partial safety factor)

HALFEN HGB HANDRAIL CONNECTION



Dimensioning

Extract, HGB-approval no. Z-21.4-1912, annex 8

| Table 8a: Design resistance of the channel using single-bolt fixing | | | | | |
|---|-----------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Channel type | | 38/17 | 40/25 | 49/30 | 54/33 |
| Minimum thickness of component h [mm] | | 100 | 120 | 140 | 150 |
| Steel failure (single-bolt fixing) | | | | | |
| Tension | $N_{Rd,s}$ [kN] | 10.0 | 11.1 | 17.2 | 30.6 |
| Shear | $V_{Rd,s}$ [kN] | 10.0 | 11.1 | 17.2 | 30.6 |
| Concrete failure (single-bolt fixing) | | | | | |
| $V_{Rd,c}$ [kN] | | 6.7 | 9.0 | 11.7 | 12.7 |
| Maximum height of concrete pressure zone x | | $0.25 \cdot e^{\textcircled{1}}$ | $0.25 \cdot e^{\textcircled{1}}$ | $0.30 \cdot e^{\textcircled{1}}$ | $0.40 \cdot e^{\textcircled{1}}$ |


| Table 8b: Design resistance of the channel using a two-bolt fixing | | | | | |
|--|-----------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Profile | | 38/17 | 40/25 | 49/30 | 54/33 |
| Minimum thickness of component h [mm] | | 100 | 120 | 140 | 150 |
| Steel failure (two-bolt fixing) | | | | | |
| Tension | $N_{Rd,s}$ [kN] | 15.0 | 16.7 | 25.8 | 45.8 |
| Shear | $V_{Rd,s}$ [kN] | 15.0 | 16.7 | 25.8 | 45.8 |
| Concrete failure (two-bolt fixing) | | | | | |
| $V_{Rd,c}$ [kN] | | 6.7 | 9.0 | 11.7 | 12.7 |
| Maximum height of concrete pressure zone x | | $0.25 \cdot e^{\textcircled{1}}$ | $0.25 \cdot e^{\textcircled{1}}$ | $0.30 \cdot e^{\textcircled{1}}$ | $0.40 \cdot e^{\textcircled{1}}$ |

$\textcircled{1} e$ = distance between the anchor channel axis and outer edges of the anchor plate. For asymmetrical anchor plates the smallest distance to the outer edge of the anchor plate is used for calculation.

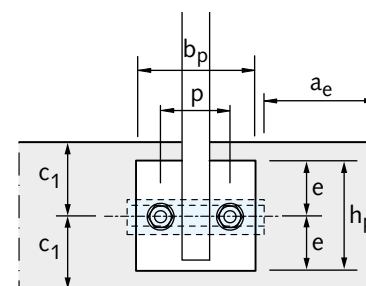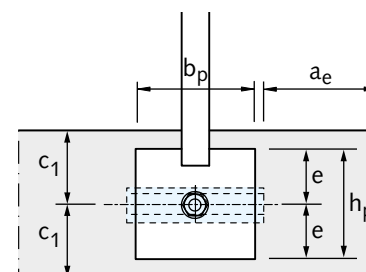


Dimensioning example HALFEN HGB Guard rail fittings

- M_{Ed} = used to calculate applicable moment relative to the channel axis
- e_{v1}, e_{v2}, e_{v3} = distance of the vertical loads to the front edge of the channel
- e_{h1}, e_{Fw} = distance of the horizontal loads to the front edge of the channel
- H_{Ed} = used to calculate the applicable horizontal effect
- V_{Ed} = used to calculate the applicable vertical effect
- h, F_w = horizontal load effects
- v_1, v_2, v_3 = vertical load effects
- b_p, h_p = anchor plate width and height

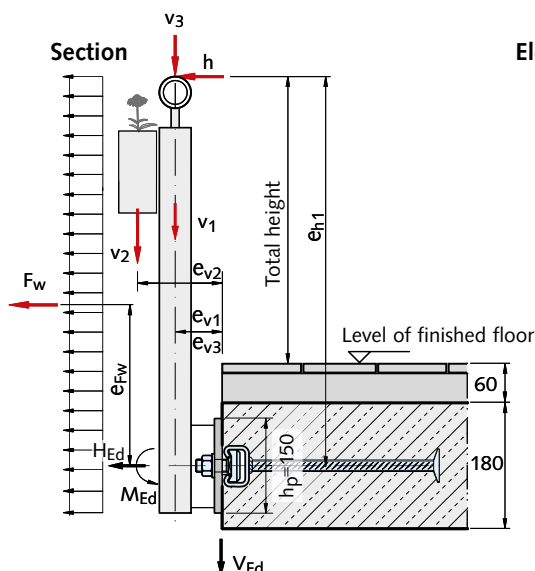

Elevation

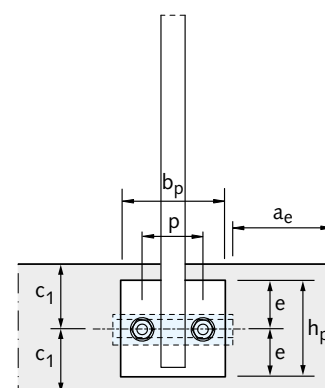

HALFEN HGB HANDRAIL CONNECTION

Calculation Example

Calculation example

| | |
|-------------------------|----------------------------------|
| Post spacing | 1.5 m |
| Post height from FFL | 1.0 m |
| Structure height | 9.0 m < 25.0 m |
| Railing/banister load | 0.5 kN/m (residential buildings) |
| Concrete slab thickness | 180 mm |

| | |
|--|----------------|
| Distance of channel axis to component edge | $c_1 = 90$ mm |
| Width of railing/banister anchor plate | $b_p = 150$ mm |
| Height of railing/banister anchor plate | $h_p = 150$ mm |

| | |
|-------------------|-------------|
| Bolt spacing | $p = 80$ mm |
| Concrete strength | C30/37 |

Load

Vertical loads:

| | |
|---|-------------------|
| Dead load, railing/banister including siding | $v_1 = 0.40$ kN/m |
| Dead load, flower box | $v_2 = 0.35$ kN/m |
| Vertical traffic load on the railing/banister | $v_3 = 0.15$ kN/m |

Horizontal loads:

| | |
|-----------------------|------------------------------|
| Railing/banister load | $h = 0.50$ kN/m |
| Wind force | $q = 0.50$ kN/m ² |

(according to EN 1991-1-4 NA. B. 3)
(assumption: building height 9.0 m < 10.0 m, not prone to resonance frequency, inland wind zone 1)

Cantilevers:

$$e_{h1} = 1.0 + 0.06 + \frac{0.18}{2} = 1.15 \text{ m}$$

$$e_{Fw} = \frac{(1.15 + 0.075)}{2} - 0.075 = 0.53 \text{ m}$$

| |
|-------------------|
| $e_{v1} = 0.10$ m |
| $e_{v2} = 0.20$ m |
| $e_{v3} = 0.10$ m |

Wind load bearing zone:

$$A = (1.00 + 0.06 + \frac{0.18}{2} + \frac{0.15}{2}) \cdot 1.5 = 1.84 \text{ m}^2$$

External pressure coefficient (acc. to table 7.1 EN 1991-1-4):

| |
|-----------------------------------|
| $h/d = 1$, area B |
| $c_{pe,1} = -1.1$ (wind-suction) |
| $c_{pe,10} = -0.8$ (wind-suction) |

according to EN 1991-1-4 chapter 7.2.1
the following is valid:
 $1 \text{ m}^2 < A \leq 10 \text{ m}^2$

$$c_{pe} = c_{pe,1} + (c_{pe,10} - c_{pe,1}) \cdot \lg A = -1.1 + (-0.8 + 1.1) \cdot \lg 1.84 = -1.02$$

Wind suction:

$$F_w = c_{pe} \cdot q \cdot A = -1.02 \cdot 0.50 \cdot 1.84 = -0.94 \text{ kN}$$

Action per support:

| | |
|--|--|
| Wind load | $F_{w,Ed} = -0.94 \cdot 1.5 = -1.41$ kN (suction) with $\gamma_F = 1.5$ |
| Railing/banister | $H_{Ed} = 0.5 \cdot 1.5 \cdot 1.5 = 1.13$ kN with $\gamma_F = 1.5$ |
| Dead load railing/banister | $V_{1,Ed} = 0.40 \cdot 1.5 \cdot 1.35 = 0.81$ kN with $\gamma_F = 1.35$ |
| Load from flower box | $V_{2,Ed} = 0.35 \cdot 1.5 \cdot 1.35 = 0.71$ kN with $\gamma_F = 1.35$ |
| Vertical load on railing/banister | $V_{3,Ed} = 0.15 \cdot 1.5 \cdot 1.5 = 0.34$ kN with $\gamma_F = 1.5$ |

Determining bearing reactions H_{Ed} , V_{Ed} and M_{Ed}

Not classed as an utility (escape-route) balcony therefore combination with wind load is not required.

Load case 1: V + railing/banister load

$$M_{Ed} = 0.81 \cdot 0.10 + 0.71 \cdot 0.20 + 0.34 \cdot 0.10 + 1.13 \cdot 1.15 = \mathbf{1.56 \text{ kNm}}$$

$$V_{Ed} = 0.81 + 0.71 + 0.34 = \mathbf{1.86 \text{ kN}}$$

$$H_{Ed} = \mathbf{1.13 \text{ kN}}$$

Load case 2: V + wind

$$M_{Ed} = 0.81 \cdot 0.10 + 0.71 \cdot 0.20 + 1.41 \cdot 0.53 = \mathbf{0.97 \text{ kNm}}$$

$$V_{Ed} = 0.81 + 0.71 = \mathbf{1.52 \text{ kN}}$$

$$H_{Ed} = \mathbf{1.41 \text{ kN}}$$

Selected:

HGB-E 49/30, l = 200 mm, A4 stainless steel

Bolt spacing p = 80 mm

2 bolts HS 50/30 M12, A4-70,

Required minimum reinforcement:

Stirrups 3 Ø 10, l_b = 300 mm

(see page 48 approval extract → annex 6, table 7),

Edge rebar 2 Ø 10

Splitting the moment into a load pair

$$N_{Ed} = \frac{M_{Ed}}{(e - 0.41 \cdot x)} + H_{Ed}$$

$$e = \frac{h_p}{2} = 75 \text{ mm} \quad (\text{see approval no. Z-21.4.1912 annex 7})$$

$$x = 0.30 \cdot e = 0.30 \cdot 75 = 22.5 \text{ mm}$$

see page 49 (approval extract → annex 8 / table 8b)

$$e - 0.41 \cdot x = 75 - 0.41 \cdot 22.5 = 65.8 \text{ mm}$$

HALFEN HGB HANDRAIL CONNECTION

Calculation Example

Load case 1: V + railing/banister load

$$N_{Ed} = \frac{1.56 \text{ kNm}}{0.0658 \text{ m}} + 1.13 \text{ kN} = 24.84 \text{ kN} \rightarrow \text{decisive}$$

$$V_{Ed} = 1.86 \text{ kN} \rightarrow \text{decisive}$$

Load case 2: V + wind

$$N_{Ed} = \frac{0.98 \text{ kNm}}{0.0658 \text{ m}} + 1.41 \text{ kN} = 16.30 \text{ kN}$$

$$V_{Ed} = 1.52 \text{ kN}$$

Verifications

Geometrical boundry conditions according to approval Z-21.4-1912 annex 6, table 6 have been met.

Verification of steel capacity

Design resistance (steel) channel HGB 49/30 using 2 bolt fixing

$$N_{Rd,s} = 25.8 \text{ kN} \quad \text{see page 49 (approval extract} \rightarrow \text{annex 8, table 8b)}$$

$$V_{Rd,s} = 25.8 \text{ kN}$$

Channel, centric pull load

$$\frac{N_{Ed}}{N_{Rd,s}} = \frac{24.84}{25.8} = 0.96 < 1 \quad \checkmark$$

Channel, shear load

$$\frac{V_{Ed}}{V_{Rd,s}} = \frac{1.86}{25.8} = 0.07 < 1 \quad \checkmark$$

Channel, interaction

$$\left(\frac{N_{Ed}}{N_{Rd,s}}\right)^2 + \left(\frac{V_{Ed}}{V_{Rd,s}}\right)^2 = \left(\frac{24.84}{25.8}\right)^2 + \left(\frac{1.86}{25.8}\right)^2$$

$$= 0.93 + 0.01 = 0.94 < 1 \quad \checkmark$$

Design resistance (steel) **bolt M12, A4-70**

$$N_{Rd,s,s} = 31.6 \text{ kN} \quad \text{see page 48 (approval extract} \rightarrow \text{annex 8, tab.9)}$$

$$V_{Rd,s,s} = 22.7 \text{ kN}$$

Bolt, centric pull load

$$\frac{0.5 \cdot N_{Ed}}{N_{Rd,s,s}} = \frac{0.5 \cdot 24.84}{31.6} = 0.39 < 1 \quad \checkmark$$

Bolt, shear load

$$\frac{0.5 \cdot V_{Ed}}{V_{Rd,s,s}} = \frac{0.5 \cdot 1.86}{22.7} = 0.04 < 1 \quad \checkmark$$

Bolt, interaction

$$\left(\frac{0.5 \cdot N_{Ed}}{N_{Rd,s,s}}\right)^2 + \left(\frac{0.5 \cdot V_{Ed}}{V_{Rd,s,s}}\right)^2 = 0.39^2 + 0.04^2 = 0.15 < 1 \quad \checkmark$$

Verification of concrete capacity

Design resistance concrete

$$V_{Rd,c} = 11.7 \text{ kN}$$

see page 49 (annex 8, table 8b)

$$M_{Rd,c} = 0.81 \cdot x \cdot b \cdot \frac{f_{ck}}{\gamma_{Mc}} \cdot (e - 0.41 \cdot x)$$

$$M_{Rd,c} = 0.81 \cdot 22.5 \cdot 150 \cdot \frac{30}{1.5} \cdot 65.8 = 3597615 \text{ Nmm}$$

$$= 3.60 \text{ kNm}$$

Concrete edge failure

$$\frac{V_{Ed}}{V_{Rd,c}} = \frac{1.86}{11.7} = 0.16 < 1 \quad \checkmark$$

$$\frac{M_{Ed}}{M_{Rd,c}} = \frac{1.56}{3.60} = 0.43 < 1 \quad \checkmark$$

$$\frac{V_{Ed}}{V_{Rd,c}} = 0.16 < 0.333 \rightarrow \text{According to the approval verification of interaction is not required, see page 46 (approval extract / page 7).}$$

Verifying the ratio between horizontal action and bending moment

$$\frac{H_{Ed}}{M_{Ed}} = \frac{1.13 \text{ kN}}{1.56 \text{ kNm}} = 0.72 < 1.5$$

\rightarrow Design model is applicable
see page 46 (approval extract / page 6)

HALFEN HTU-S CAST-IN CHANNEL FOR FIXING PROFILED SHEET METAL


The benefits at a glance

The HALFEN HTU-S Cast-in channel is ideal for fixing all types of profiled sheets – easy and simple with self-drilling screws. Suitable for both shear loads and tension loads.

Thanks to the innovative channel design with its corrugated sides and filler, the new generation of HALFEN HTU Cast-in channel is installed entirely in the required concrete cover. This avoids any problem with the required reinforcement.



HALFEN HTU-S 60 Cast-in channel
for fixing profiled sheet metal

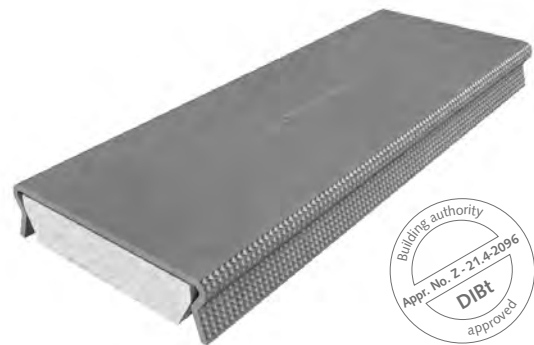

HALFEN HTU-S 100 Cast-in channel
for fixing profiled sheet metal

Safe and reliable

- › innovative geometry and corrugated edging ensure reliable anchorage
- › polystyrene filler prevents the self-drilling screw from hitting concrete
- › building authority approved
- › the type stamp on the channel back ensures identification after installation

Efficient and economical

- › simple installation in the required concrete cover
- › one channel type irrespective of the reinforcement layout
- › simple installation in the precast plant



Fixing of trapezoidal sheet metal roof element



Façade fixed using HALFEN HTU Cast-in channels
(Cologne Bonn Airport)

HALFEN HTU-S CAST-IN CHANNELS

General/product range

The HALFEN Cast-in channel for fixing trapezoidal sheet metal has a U-shaped cross-section with the sides angled outwards. The corrugated sides of the channel provide a positive-lock with the concrete.

Both HTU-S Channel types (60 and 100mm) allow various bolt fixing and layout options. HALFEN HTU-S Cast-in channels are building authority approved. Approval: DIBt no. Z-21.4-2096



Fixing trapezoidal sheet metal using self-drilling screws

| | |
|---------------------------------------|---|
| Area of application | Fixing of trapezoidal sheeting or wall-cladding elements using building authority or ETA approved self-drilling screws. Installed flush with the surface of precast concrete elements; concrete strength C25/30 up to C50/60, cracked or non-cracked. |
| Materials/corrosion protection | HTU Channel made of zinc-plated steel may be installed in environments of C1 to C3 corrosion category acc. to EN ISO 12944-2:2018-04. |

Available lengths:


HTU-Channels are available in 3000 or 6000 mm lengths.

Order example HTU-S Channel, width 60 mm :

HTU 60/25/2,5-S

6000

length [mm]
product name

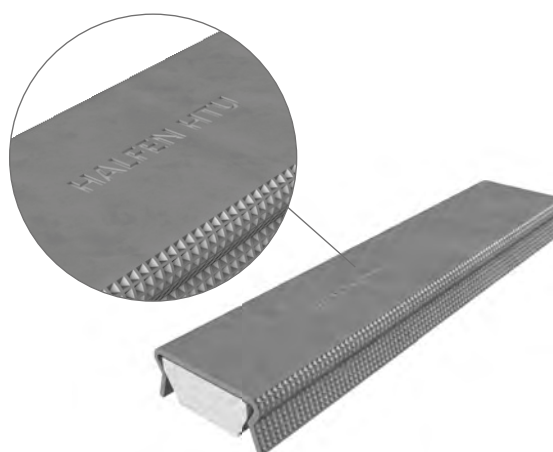

Identification

Original HALFEN Cast-in channels for fixing trapezoidal sheet metal can be identified by the stamp on the back of the channel displaying the brand name and the product description 'HALFEN HTU'.

Detailed installation instructions for the self anchoring HALFEN HTU-S Channel can be found at:
www.halfen.com ▷ Brochures ▷ Installation Instructions ▷ Fixing systems




HALFEN HTU-S CAST-IN CHANNELS


Dimensioning

Anchorage must be planned in accordance with engineering standards. Verification of direct local force transmission from the channel into the concrete has been provided if the approved values are complied with. Connecting accessories must be verified separately. Technical design must comply with building authority approval no. Z-21.4-2096.


Constructive boundary conditions

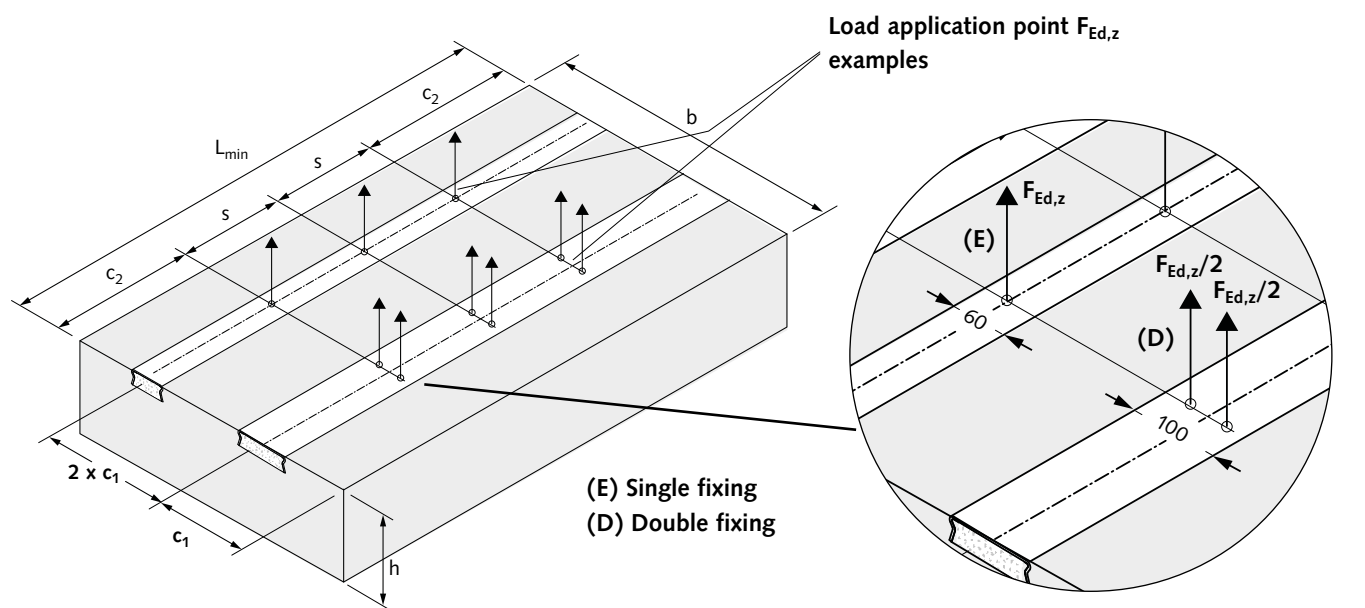


HTU-S 60 ($e_{\max} \leq b_{HTU}/6$)

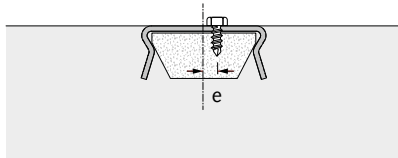

HTU-S 100 (E) ($e_{\max} \leq b_{HTU}/6$)

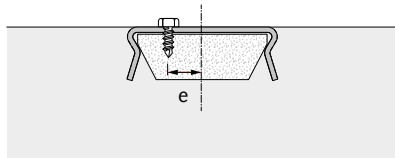

HTU-S 100 (D) ($50 \text{ mm} \leq s \leq 70 \text{ mm}$)

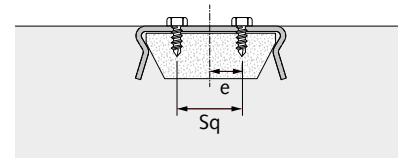

Minimum element dimensions, bolt spacings and load resistances for concrete strength class C30/37 to C50/60 ^{①②③}

| Channel | L_{\min} | (E) Single (D) Double fixing | b_{\min} | h_{\min} ^④ | $C_{1,\min}$ ^④ | $C_{2,\min}$ | s_{\min} | F_{Rd} ^{①②③} | | |
|-----------------|------------|------------------------------------|----------------|-------------------------|---------------------------|--------------|------------|-------------------------|------|------|
| | [mm] | | | | | | | | [mm] | [mm] |
| HTU 60/25/2,5-S | 150 | E | $2 \times c_1$ | 200 | 90 | 75 | 150 | 3,6 | | |
| | 250 | E | | | | | | 125 | 250 | 4,9 |
| | 310 | E | | | | | | 155 | 310 | 5,7 |
| HTU 100/25/3-S | 150 | E | $2 \times c_1$ | 200 | 120 | 75 | 150 | 2,4 | | |
| | | D | | | | | | 4,2 | | |
| | 250 | E | | | | | | 125 | 250 | 3,5 |
| | | D | | | | | | 6,0 | | |
| | 310 | E | | | | | | 155 | 310 | 4,2 |
| | | D | | | | | | 7,1 | | |

① Resistance F_{Rd} applies for all load directions. The permanent load of $F_{Ed,z}$ must be limited to $0.15 \cdot F_{Rd}$.

② For concrete strength class C25/30 the resistances must be reduced with factor 0.91.

③ For concrete strength class > C30/37 the resistance F_{Rd} may be increased by Ψ_c acc. to (annex 5, table 1 and annex 6, table 2)

④ For HTU 60/25/2,5-S lower values are allowed. See approval annex 5, table 1.


HALFEN HTU CAST-IN CHANNELS

C-shaped channels with welded anchors

The HALFEN Trapezoidal sheet metal installation channels were developed in cooperation with the Association for the light-weight steel construction industry (IFBS Industrieverband für Bausysteme im Stahlleichtbau).


Made as a C-shaped channel in hot-dip galvanized steel with at least two welded anchors, and approved by the German Institute of Building Technology (DIBt Deutsches Institut für Bautechnik).

Approval: DIBt no. Z-21.4-84

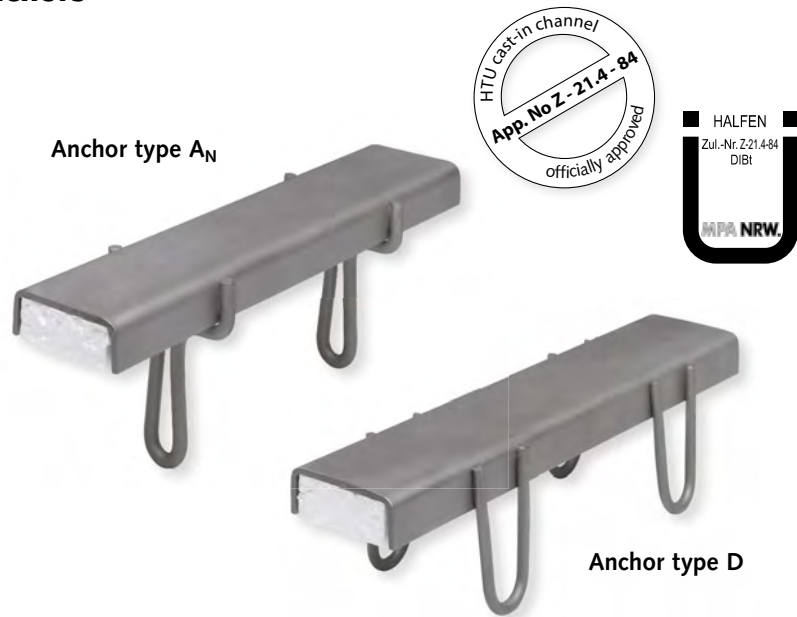

HALFEN HTU Cast-in channels, steel hot-dip galvanized


| | | Steel | | |
|--|------------------|---|-------------|--------------|
| | | Material | Standard | Zinc coating |
| | Channel profiles | ■ 1.0038 | EN 10 025-2 | FV: ≥ 50 µm |
| | Anchor AN, D | | | |
| | Fixing | Fixing of trapezoidal sheet metal or wall-cladding elements using building authority or ETA approved self-drilling screws or metal deck fasteners. Installed flush with the surface of precast concrete elements. | | |

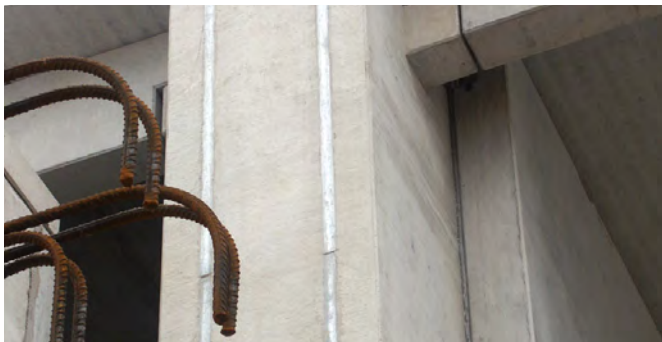

Vertical HALFEN HTU Cast-in channels for fixing façade panels

Hot-dip galvanized FV:


Dipped in a galvanising bath at a temperature of approximately 460°C. This method is used primarily for open-profile channels.



HALFEN HTU CAST-IN CHANNELS

C-shaped channels with welded anchors

Product range

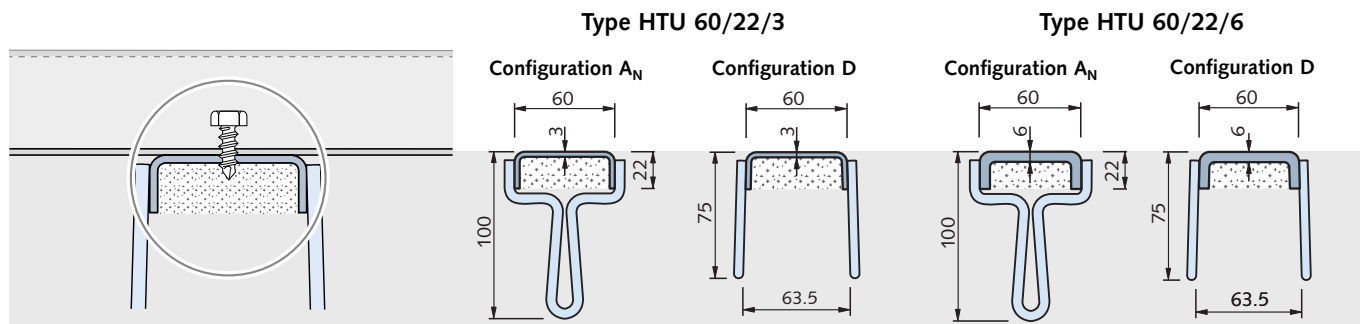

| Profile cross-section A | 2.81 cm ² | | 4.94 cm ² | |
|--|---|-----------|---|-----------|
| Moment of inertia I_y / Moment of resistance w_y | 1.13 cm ⁴ / 0.71 cm ³ | | 1.84 cm ⁴ / 1.27 cm ³ | |
| Profile weight including anchors | 2.49 kg/m | 2.50 kg/m | 4.25 kg/m | 4.26 kg/m |

Ordering example:

HTU 60/22/3 - D2 - FV - 3000 - Sf

type / profile
 anchor configuration
 material / finish
 length [mm]
 polystyrene strip filler

■ FV = Steel S235JR, hot-dip galvanized

| HTU 60/22/3 | Number of anchors |
|------------------------------------|-------------------|
| ■ = hot-dip galvanized | |
| HTU 60/22/3 - AN2 - FV - 3000 - Sf | 8 |
| HTU 60/22/3 - D2 - FV - 3000 - Sf | 8 |
| HTU 60/22/3 - AN3 - FV - 3000 - Sf | 20 |
| HTU 60/22/3 - D3 - FV - 3000 - Sf | 20 |


Connecting element example HTU 3 mm material steel ETA 10/0200:
 Self-drilling screws 6.3x19
 e.g. JT2-6-6,3-19-xE16 with sealing disc.
 Connecting element is exposed to weather:
 JT3-6-6.3x25-E16 (Wall) or JZ3-6-6.3x25-E22 (Roof)

| HTU 60/22/6 | Number of anchors |
|------------------------------------|-------------------|
| ■ = hot-dip galvanized | |
| HTU 60/22/6 - AN2 - FV - 3000 - Sf | 8 |
| HTU 60/22/6 - D2 - FV - 3000 - Sf | 8 |
| HTU 60/22/6 - AN3 - FV - 3000 - Sf | 20 |
| HTU 60/22/6 - D3 - FV - 3000 - Sf | 20 |


Connecting element example HTU 6 mm material steel ETA 10/0200:
 Self-drilling screws 6.3x22
 e.g. JT2-6-6,3-x22-V16 with sealing disc or cartridge fired nails.
 Connecting element is exposed to weather: see screw, or nail approval.

Anchor spacing:

Type D2 or AN2

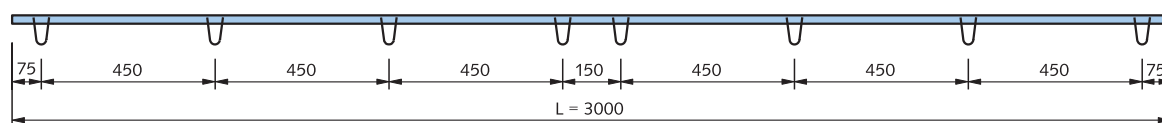



Type D3 or AN3

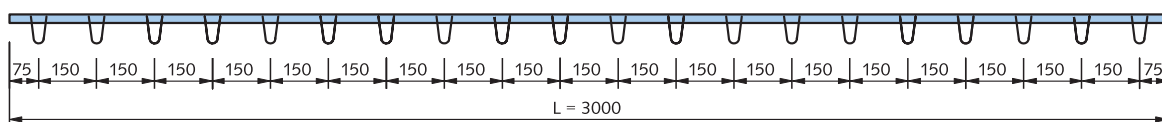

Identification HTU

Dimensions in [mm]

A yellow identification label is fixed to the back of each channel.

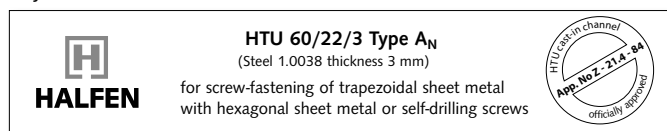

HALFEN HTU CAST-IN CHANNELS

C-shaped channels with welded anchors



Table 1 Maximum design load-carrying capacity F_{Ed}


| Profile HTU | Anchor spacing s [mm] | max. F_{Ed} [kN] | | max. F_{Ed} [kN] | | max. evenly distributed load q_{Ed} [kN/m] | | |
|-------------|-------------------------|--------------------|--|--------------------|-----|--|-----|------|
| 60 / 22 / 3 | 450 | $p = s$ | | $p = s/2$ | 3.5 | 15.5 | | |
| | 150 | | | | | 46.6 | | |
| 60 / 22 / 6 | 450 | | | | | 7.0 | 3.5 | 15.5 |
| | 150 | | | | | 7.0 | 3.5 | 46.6 |

$\sqrt{N_{Ed}^2 + V_{xEd}^2 + V_{yEd}^2} \leq \text{max. } F_{Ed}$

Concrete \geq C20/25

Table 2 Minimum distance when exploiting maximum load as in table 1

| Profile | Minimum interaxial spacing and edge distance | | | | | |
|---|--|--------------------|--------------------|--------------------|------------------|------------------|
| | a_a ① [mm] | a_r ② [mm] | a_e ③ [mm] | a_f ④ [mm] | h ⑤ [mm] | b ⑥ [mm] |
| HTU { 60/22/3 60/22/6 | | | | | | |
|  Type AN | 200 | 100 | 20 | 20 | 100 + nom c | 200 |
|  Type D | 200 | 100 | 20 | 20 | 75 + nom c | 200 |

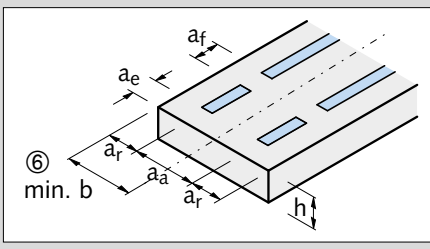

① If the (trapezoidal sheet metal) channels are placed so that the anchors of adjacent channels are offset by at least 200 mm, the axial spacing a_a may be reduced to 80 mm.

② If not exploiting the maximum load capacity F_{Ed} , see table above, the edge distance a_r may be reduced. This applies only for central tensile stress N_{Ed} .

$$a_{r \text{ red.}} = \frac{\text{actual } N_{Ed}}{\text{max. } F_{Ed}} \times a_r \geq 50 \text{ mm}$$

actual N_{Ed} = design rating of actual load

max. F_{Ed} = maximum load as in the table above

The edge distances must not be reduced if transverse stress (V_{xEd} , V_{yEd}) is present.

③ With full exploitation of maximum load F_{Ed} as in the table above, the last anchor must be at least 100 mm from the component edge.

④ When fully exploiting maximum load capacity F_{Ed} , see table above, the "last anchors" of adjacent channels must be at least 150 mm apart.

⑤ Depends on the anchor's size and the required concrete cover.

⑥ Minimum width of building component for a one channel layout.


HALFEN HTU CAST-IN CHANNELS

C-shaped channels with welded anchors


Installation

The ready-to-install HTU Channel is embedded flush with the final concrete surface. It is advisable to level the concrete surface and to apply a slight slope to the outer edge of the concrete. This is to ensure that the trapezoidal sheet metal rests only on the HTU Channel. According to German approval a heightened installation of up to 5 mm is also possible.

Trapezoidal sheet metal fixing in wall applications

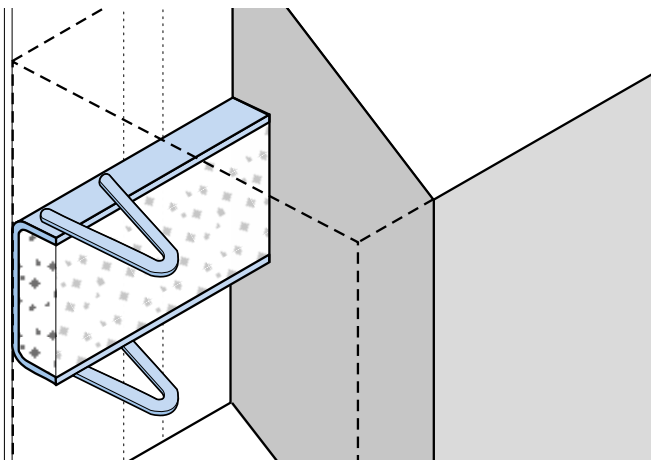

Screw placement

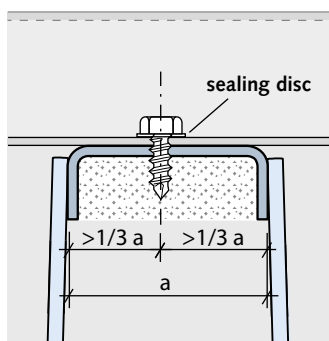


Assembly (with self-drilling screw)

- › use a power-driver to fix the self-drilling screw; a pilot hole is not required. Even 4-fold overlapping at joints is not a problem with self-drilling screws
- › the recommended engine speed and socket size must be observed; See product data sheet of the self-drilling screws


Alternatively, if the trapezoidal sheet metal manufacturer requires a minimal support width larger than 60 mm, this can be achieved through a flush channel installation and a flat concrete surface. Ensure that pre-stressed concrete trusses are properly aligned, centred and absolutely plane. Maintaining a 20 mm gap between individual channel ends is recommended.

Trapezoidal sheet metal fixing in roof applications

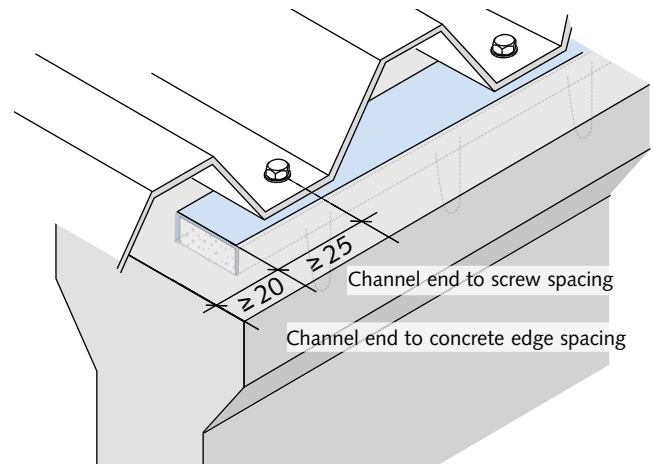

Dimensions in mm

Recommended butt joint gap between two channels

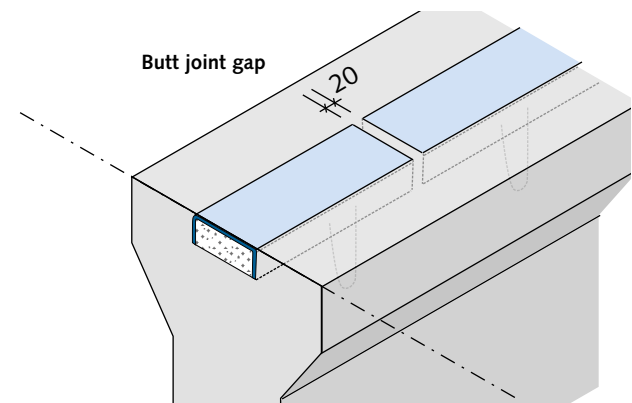

- › suitable tools for various screws can be obtained from the screw supplier
- › the trapezoidal sheet metal must be attached in the central third of the channel back; Screws must be positioned at a minimum distance of 25 mm from the channel ends

FRAMING CHANNELS


The benefits at a glance

To complement the product range we have a wide range of framing channels with accessories. We can supply everything you need for your project; everything from one source.



HALFEN HM/HZM Framing channel, cold-rolled

HALFEN Framing channels, used in combination with matching HALFEN Bolts (or threaded plates) have all the benefits needed for versatile bolt and frame constructions.

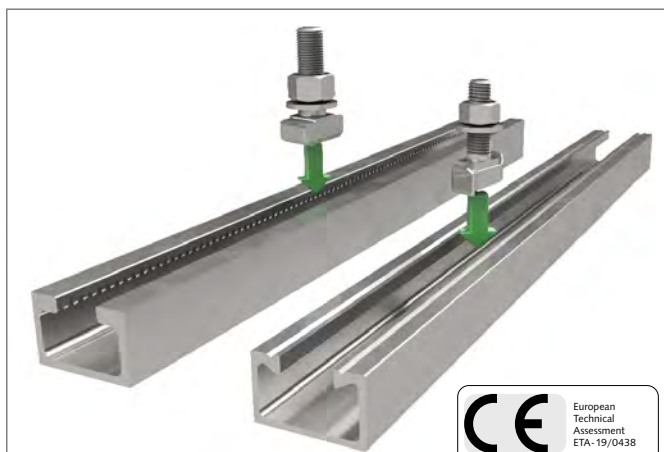


HALFEN HM/HZM Framing channel, hot-rolled

The HALFEN Framing channels range includes hot and cold-rolled channel profiles with standard or serrated channel lips.

Quick and economical

- › full flexibility in positioning and dimensioning of the bolt connection
- › quick installation and adjustability of plant equipment or building components
- › dirt and noise free on-site modifications
- › innovative modular assembly system; numerous complementary accessories available
- › no more welding in hazardous environments
- › bolted connections do not damage the corrosion protection of plant components

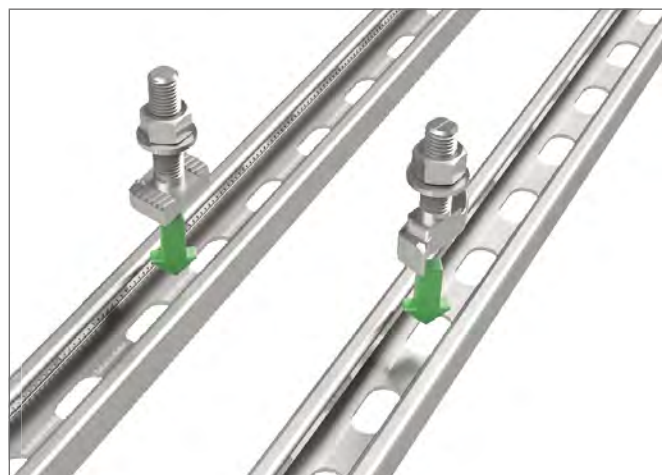

HALFEN HL/HZL Slotted channels

HALFEN Framing channels are available, mill-finished, hot-dip galvanized or in stainless steel materials; slotted or non-slotted.



The complete, available product range for industrial application can be found at www.halfen.com in the technical product information catalogues; MT-FBC (Flexible Bolt connections) or MT-FFC (Flexible framing connections).




FRAMING CHANNELS


Framing Channels HM/HZM/HL/HZL – Application Examples

Type Overview


Framing channel




HM 28/15

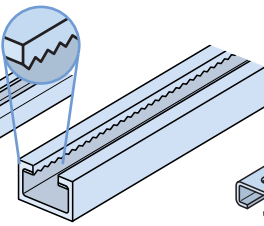Framing channel
serrated


HZM 38/23

Slotted
framing channel


HL 28/15

Slotted
framing channel
serrated

HZL 41/22

Slotted
framing channel
serrated

HZL 63/63

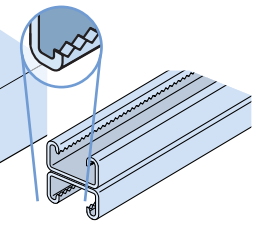Double channel
serrated

HZM 41/22D


Application Examples

HALFEN Framing channels HM/HZM and slotted HALFEN Framing channels HL/HZL can be attached to a supporting structure using various methods:


- ① fastened to concrete or masonry with HB-VMU plus wedge anchors
- ② bolted to HALFEN HTA-CE and HZA Cast-in channels
- ③ connected to threaded rods
- ④ clamped to steel profile supports
- ⑤ welded to steel components
- ⑥ screwed or nailed to wood structures

HALFEN Framing channels are a part of the HALFEN Framing system:


- installations for plant engineering
- technical equipment in buildings
- heavy and light installations

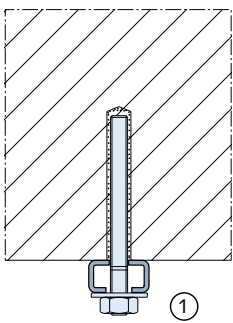


①

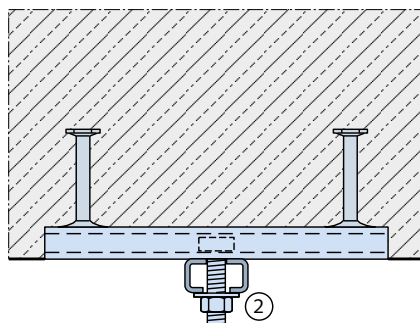


②

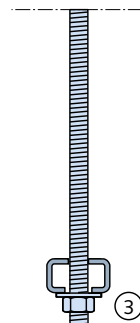

③

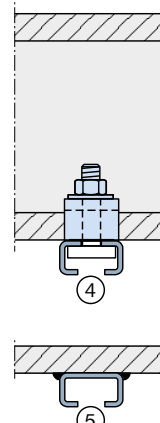

④

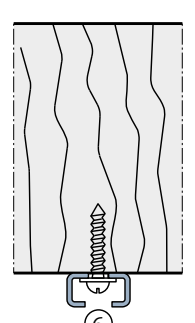

⑤



Typical application of the HALFEN Powerclick system

The HALFEN Framing system product range can be found in the following catalogues:

HALFEN Flexible bolt connections,
HALFEN Flexible framing connections
HALFEN Powerclick System.



FRAMING CHANNELS

Framing Channels HM/HZM/HL/HZL – Type Overview

| Heavy Duty Framing System | | | | | | | | | | | | | | |
|---------------------------|------------|---------------------------|----------------------------------|-------------|-------------|---------------------------|------------|-------------|------------|----------------------|--------------|---------------------|---------------------|-----------|
| Hot-rolled | | | | Cold-rolled | | | Hot-rolled | Cold-rolled | | Hot-rolled, serrated | | | | |
| HM 72/48 | HM 55/42 | HM 52/34 | HM 50/30 | HM 49/30 | HM/HL 50/40 | HM 486 | HM 40/22 | HM 40/25 | HM 422 | HZM 64/44 | HZM 53/34 | HZM 41/27 | HZM 38/23 | HZM 29/20 |
| | | | | | | | | | | | | | | |
| 72 33 | 54.5 26 | 52.5 22.5 | 49 22.5 | 50 22 | 49 22 | 48 27 | 39.5 18 | 40 18 | 39.5 18 | 64 26 | 52.5 22.5 | 40 18.5 | 38 18 | 29 14 |
| | | | | | | | | | | | | | | |
| HS / HSR 72/48, GWP 72/48 | HS 50/30 | HS / HSR 50/30, GWP 50/30 | HS 50/30, GWP 50/30 or GWP 50/40 | | | HS / HSR 40/22, GWP 40/22 | | HSZ 64/44 | | HSZ 53/34 | HSZ 38/23 | HSZ 38/23, HS 38/17 | HSZ 29/20, HS 28/15 | |

| Medium Duty Framing System | | | | | | |
|---|---------------|---------------|---------------|-----------------------|-----------------|-----------------|
| Cold-rolled | | | | Cold-rolled, serrated | | |
| HM / HL 41/83 | HM / HL 41/62 | HM / HL 41/41 | HM / HL 41/22 | HZL 63/63 | HZM / HZL 41/41 | HZM / HZL 41/22 |
| | | | | | | |
| 41 22 | 41 22 | 41 22 | 41 22 | 63 22 | 41 22 | 41 22 |
| | | | | | | |
| HSZ/HS 41/41, HSZ 41/22 GWP 41/41, GWP 41/22 | | | | | | |

| Light Duty Framing System | | | | | |
|---------------------------|---------------------|--------------------|--------------------|---------------------|--------------------|
| Cold-rolled | | | | Cold-rolled | |
| HM 36/36, HL 36/36 | HM 38/17 | HM 28/28, HL 28/28 | HM 28/15, HL 28/15 | HM 315 | HM 20/12, HL 20/12 |
| | | | | | |
| 36 18 | 38 18 | 28 12 | 28 12 | 30 16 | 20 10 |
| | | | | | |
| HS 38/17, GWP 38/17 | HS 28/15, GWP 28/15 | | GWP 28/15 | HS 20/12, GWP 20/12 | |

Materials/Finish:

- FV Steel hot-dip galvanized or WB steel mill finished
- SV Steel, sendzimir galvanized
- A4 Stainless steel 1.4571/1.4404
- A2 Stainless steel 1.4307 (on request)
- HCR Stainless steel 1.4547/1.4529 (on request)

For information on materials → see page 9-10

HZM/HZL serrated profiles

ROOF AND WALLS

The right solution for each application

The efficient and established installation systems for timber roof structures, masonry restraints and connectors for concrete façades are proven practical solutions for the construction industry, greatly improving construction time with significant cost-saving.



HALFEN HSF Rafter shoe

Suitable for horizontal forces acting on rafter and collar beam roofs.



HALFEN HNA Timber fixing strap

Suitable for all acting loads e.g. wind loads in roof structures.



HALFEN HKZ or SPV Restraint ties

For connection of tension and compression loads from concrete walls elements.



HALFEN ML and BL Brick tie anchor system

For connection of brickwork to concrete walls and columns or steel elements.



HALFEN HVL-M Precast connection with HALFEN HVL-E Cast-in channel

Suitable for horizontal loads in concrete wall elements (loads perpendicular to the bracket).



HALFEN HKW Corner guard

Wall and column corner protector; application in industry and multi-storey car parks.

ROOF AND WALLS

Application Examples



HALFEN HSF Rafter shoe 6/12



HALFEN HKZ Restraint tie with serrated washer



Airbus paintshop with HALFEN HVL Restraint tie



HVL-System in precast building components



Connecting construction timbers to concrete using HALFEN HNA



Timber roof construction with HALFEN HNA Fixing straps




Corner guards in an industrial environment




HALFEN ML Brick-tie anchor system

ROOF AND WALLS

HALFEN HSF Rafter Shoe

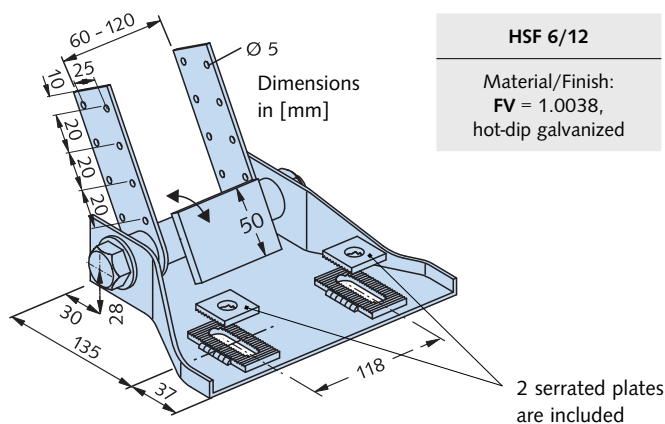

Example

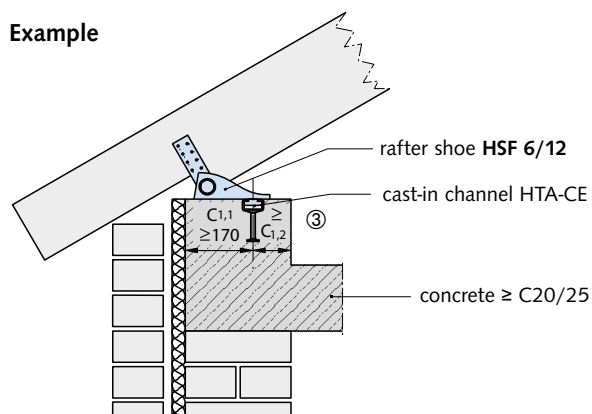

Definition $c_{1,1}$ and $c_{1,2}$ see page 25

| Design values F_{Rd} | | | |
|------------------------|---------------------------------|----------------------|----------------------|
| Load F_{Rd} | Required HALFEN Cast-in channel | Min. edge distance ② | Required HALFEN Bolt |
| [kN/Rafter] | Type | $c_{1,2}$ [mm] | Type dimensions |
| 12.6 | HTA-CE 38/17 | 75 | HS 38/17 - M16 × 40 |
| 16.8 | HTA-CE 40/22 P HTA-CE 40/25 | 100 | HS 40/22 - M16 × 50 |
| 19.6 | HTA-CE 50/30 P HTA-CE 49/30 | 150 | HS 50/30 - M16 × 50 |

In modern wood constructions, HSF 6/12 rafter shoes are used to support the horizontal forces in rafter and collar tie roofs.

The advantages at a glance:


- minimal planning; simply specify the profile and position of the HALFEN Cast-in channels in the concrete element
- clearly defined statics with flexible rafter shoes
- complex and therefore costly support structures are not necessary
- simple and straightforward roof construction:
 - a) adjustable support plate
 - b) adjustable nailing brackets for vertical anchorage for various rafter widths from 60 to 120 mm
 - c) adjustable in longitudinal rafter axis ± 15 mm
- freely adjustable rafter spacings in the longitudinal axis of the HALFEN Channel without additional measures
- hot-dip galvanized for excellent corrosion protection

The horizontal forces are transferred into the main concrete structure using (ETA) European Technical approved HALFEN HTA-CE Cast-in channels.

During assembly ensure that the serration in the counter plates engages in the base plate. The marking on the counter plates must be at right angles to the slot in the base plate.

Rafter roof static system:

$$F_{1,d} < F_{Rd}$$

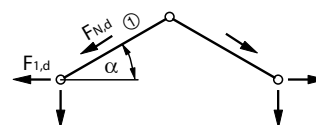


① The maximum rafter strength is limited by the design load of each individual component in the rafter shoe. Load tests resulted in a mean breaking load of 50 kN. With normal loads larger than the recommended load capacity (= about 1/3 of the breaking load), the rafter spacing will need to be reduced.

② If lower loads are present, then the minimum edge distance $c_{1,2}$ for the HALFEN Cast-in channels can be reduced. The distance to the concrete edge must be at least 170 mm.

③ Make sure that the HALFEN Cast-in channels are installed flush with the concrete surface. Use spacers if necessary.

ROOF AND WALLS


HALFEN HNA Timber Fixing Strap

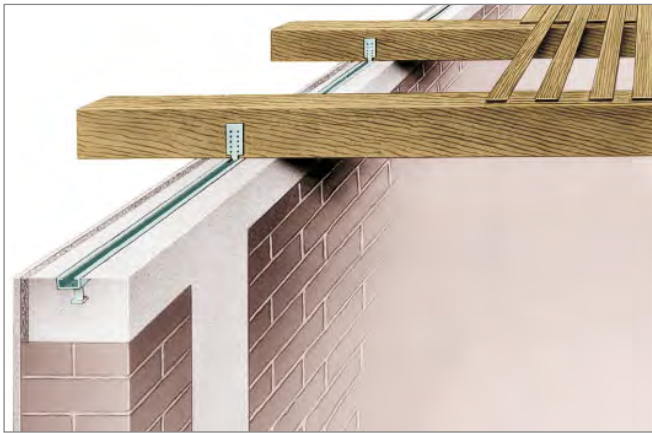

Typical installation of timber beams using HNA nailing straps with HALFEN Cast-in channels embedded in concrete.

Type selection

Dimensions in [mm]

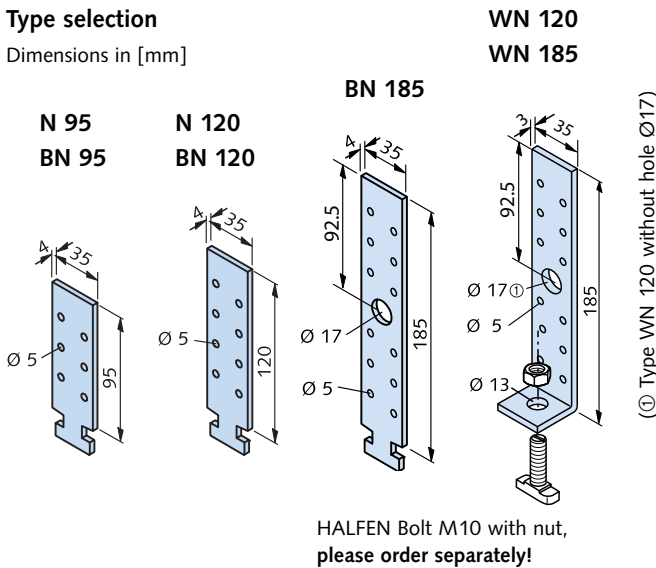


To provide an optimal base for roof framework, continuous HALFEN HTA-CE Cast-in channels or HALFEN HTA-CE Cast-in channel short elements are cast in the concrete; suitable for concrete ring beams or slabs. The type of HALFEN HTA-CE Cast-in channels, nailing straps and nails depend on the assumed loads (ex. wind force).

For calculation and design criteria see:


- EN 1991-1-4 (EC1) and EN 1991-1-4/NA
- EN 1995-1-1 (EC5)

The timber fixing straps can be positioned on one or both sides of the timber beams or rafters. Refer to the following table for F_{Rd} load capacities. The beams/framework must be secured against twisting when straps are used only on one side of the beams, (example by nailing to the upper wood roof boarding).

Ordering example:

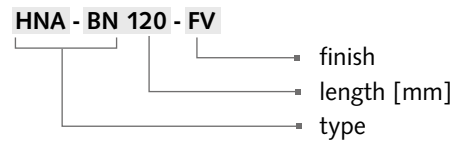

Assembly example:

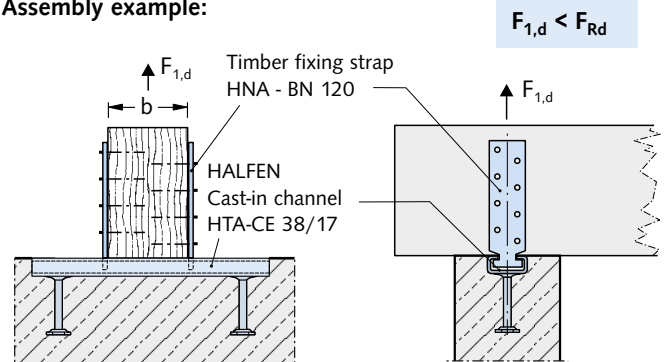

| Type selection, timber fixing straps | | | | | | |
|--|---|--|--------------------|-----------------|---|--|
| Suitable for HALFEN Cast-in channel: | Material/Finish FV = 1.0038, hot-dip galvanized | Design value for load capacity F_{Rd} [kN] for each beam attachment | | | Attaching timber fixing straps to wooden beams/rafters | |
| | | Position of timber fixing straps | | | Wire nails | Anchor nails |
| | | Single-sided | Double-sided | | | |
| Item name: Length [mm] | | | for $b \geq 60$ mm | $b \geq 100$ mm | | |
| HTA-CE 28/15 hot-dip galvanized (FV) | HNA - N 95 - FV | 4.2 | 4.9 | 5.6 | according to EN 10230-1 | according to the manufacturer's technical approval |
| | HNA - N 120 - FV | | | | | |
| | HNA - WN 120 - FV | 1.4 | 2.8 | 2.8 | | |
| | HNA - WN 185 - FV | | | | | |
| HTA-CE 38/17 hot-dip galvanized (FV) | HNA - BN 95 - FV | 6.3 | 7.5 | 8.4 | | |
| | HNA - BN 120 - FV | | | | | |
| | HNA - BN 185 - FV | 1.4 | 2.8 | 2.8 | | |
| | HNA - WN 120 - FV | | | | | |
| HNA - WN 185 - FV | | | | | | |

ROOF AND WALLS

Brick Tie Anchor Systems ML + BL


HALFEN Brick tie systems are economic and proved fixing systems using HALFEN ML Brick ties for fixing brickwork, in-fill panels, partition walls, cladding panels (with or without air gap or thermal insulation) to steel or

timber structures or concrete walls and columns. **The brick ties are able to move vertically in the wall connector channels; this greatly reduces movement cracks in the brickwork.**


All HTA-CE and HMS profiles have a foam filling to prevent concrete ingress. The channels are attached to the formwork using standard nails.

The HALFEN Brick tie anchors are inserted at the recommended intervals (static requirements) in the brick wall during construction. The anchors are inserted in the brick tie channels, turned 90°, laid flat between the rows of brick and pressed into the mortar. The perforations in the anchors optimise anchorage with the mortar.


Wall connection

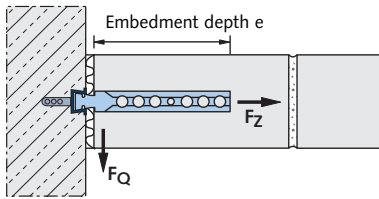



Facing brickwork connection

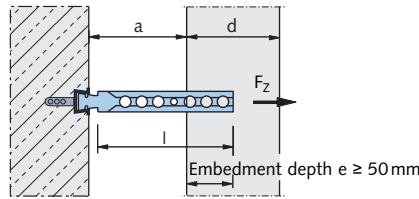


ML Brick ties in combination with HALFEN Channels HMS, HTA, HM and HL

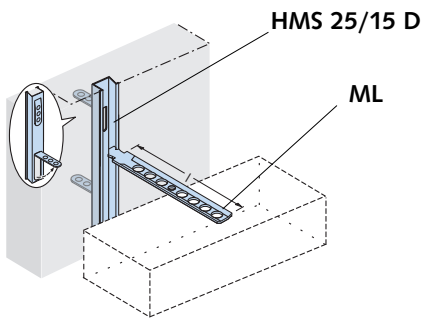




The pre-punched anchors in the HMS Channels are bent out by hand every 250 mm on-site to ensure safe anchorage in the concrete.

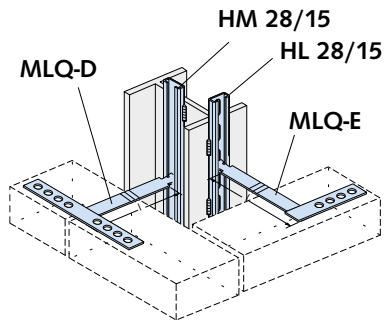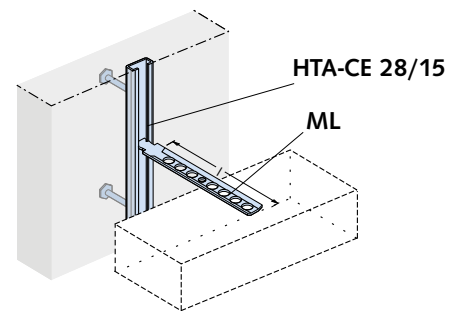

HM 28/15 welded to steel column. HL 28/15 can be alternatively bolted with dowels to concrete.

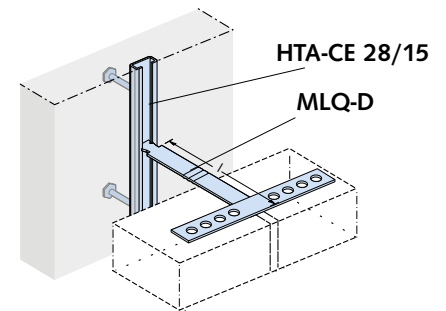

BL Brick tie in combination with HALFEN Channel type HTA 38/17 and HM 38/17

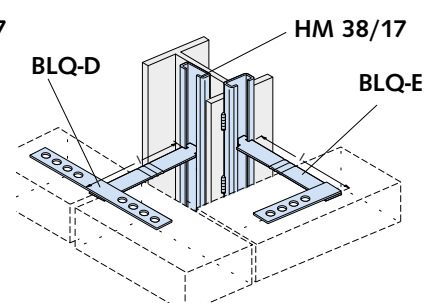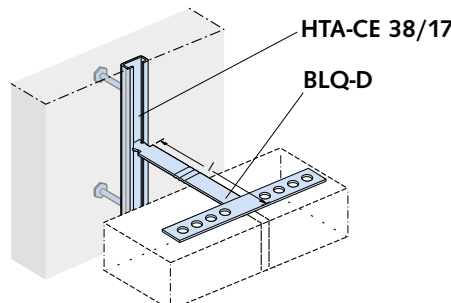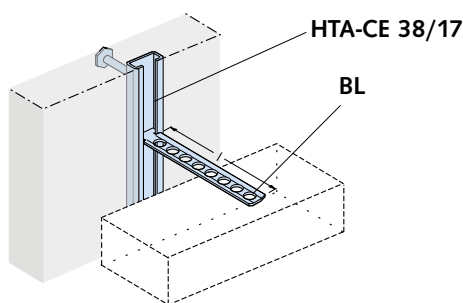

ROOF AND WALLS


Brick Tie Anchor Systems ML + BL

| Allowable wall spacing a | | | |
|-----------------------------|---------------------------------|----------------|--------|
| Connection two-leaf masonry | Length l (l ₁) [mm] | Spacing a [mm] | d [mm] |
| | 85 | 20 - 45 | 115 |
| | 120 | 40 - 80 | |
| | 180 | 85 - 140 | |
| | (300) | 0 - 80 | 240 |
| | (350) | 20 - 95 | |
| (400) | 35 - 115 | | |

HALFEN Brickwork anchors are verified in accordance with EN845-1 for various anchor channels with a minimum embedment depth of 50mm:



| Characteristic load-bearing capacity (validated performance) | | | | |
|--|---------|----------------|----------------|--------------------|
| | | BL | ML | ML1 |
| F _Z [kN] Axial load | HTA-CE | 3.2 | 2.7 | 2.5 |
| | HMS | - | 1.6 | 1.6 |
| F _Q [kN] Shear load | HTA/HMS | 2.7 | 1.5 | 1.4 |
| F _D [kN] Compression load | HTA/HMS | 1.0 (BL180) | 1.0 (ML180) | 0.375 (ML1-245) |

Sliding sleeve ML-G 150 for ML-Anchor, for wall connections

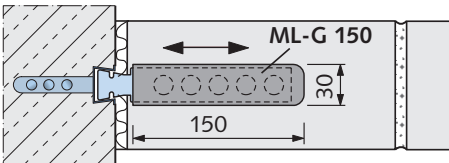

Allows movement in the anchor longitudinal direction; this helps to avoid cracking in long sections of brick wall or infill brickwork connected to concrete structures.


Material: Soft-PVC Order no. 0134.010-00001

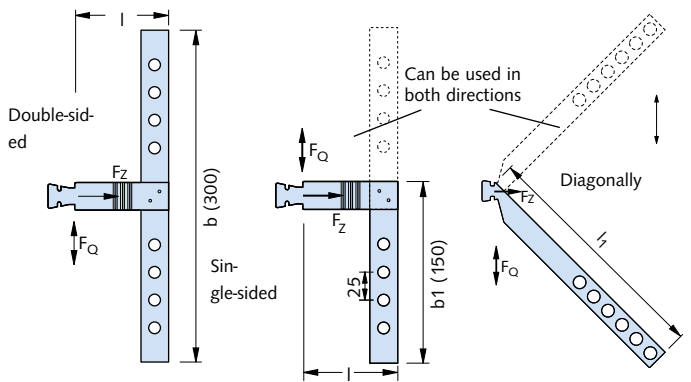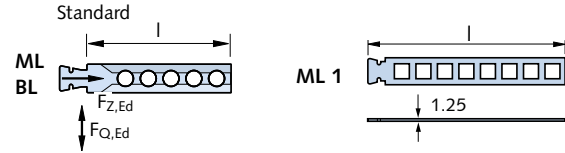



Brick ties ML 1 for connections in interior applications

Material: Stainless steel W1.4301 A2

| Type | Length l [mm] | Order no. 0013.010- |
|-------|---------------|---------------------|
| ML1 - | 125 | 00001 |
| | 185 | 00002 |
| | 245 | 00003 |

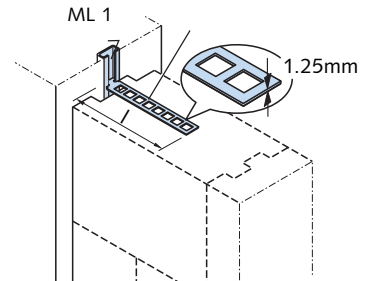

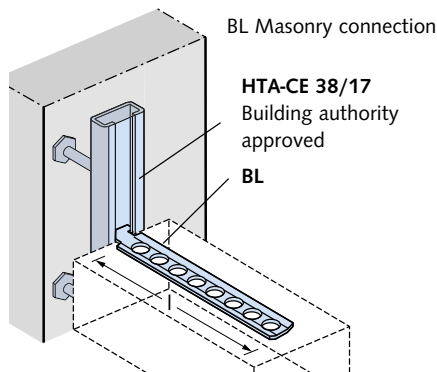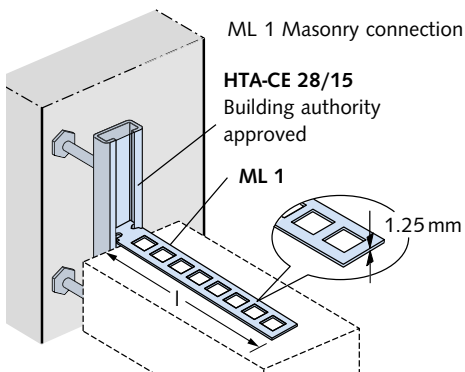













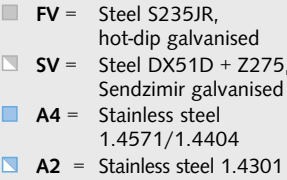
| Channels load-bearing capacity with wall tie spacing of ≥ 25 cm | | | |
|---|-------------|--------------|--------------|
| Brick tie channel | HMS 25/15 D | HTA-CE 28/15 | HTA-CE 38/17 |
| Centric tension F _Z [kN] (F _{Z,Rd}) | 1.2 (1.6) | 3.0 (4.0) | 4.5 (6.1) |
| Transverse stress F _Q [kN] (F _{Q,Rd}) | 1.5 (2.0) | 3.0 (4.0) | 4.5 (6.1) |



ML/BL Masonry connection

ROOF AND WALLS

Brick Tie Anchor Systems ML + BL

| Brick-tie channel | | Brick-tie anchor | | | | | | | | | | | |
|---|--|---|--|---|---|-----------------------|---------------------------------------|-----------------------|------------------------------------|------------------------------------|------------------------------|--------------------------------|--------------------------------|
|  HMS 25/15 D L = 2500 mm  |  ML Standard 26 × 2 [mm] |  ML1 25 × 1.25 [mm] |  MLQ - D Double-sided 25 × 3 [mm] |  MLQ - E One-sided 25 × 3 [mm] |  MLS Diagonal 22 × 3 [mm] | Type Length l [mm] | Type Length l [mm] | Type Length l [mm] | Type Length l [mm] | Type Length l ₁ [mm] | | | |
| | | | | | | | | | | | ML - 85 | ML 1 - 125 | MLQ-D - 85 |
|  HTA-CE 28/15 L = 1050 mm ^① L = 6070 mm ^①  | ML - 120 ML - 180 | ML 1 - 185 ML 1 - 245 | MLQ-D - 120 MLQ-D - 180 | MLQ-E - 120 MLQ-E - 180 | MLS - 350 MLS - 400 | Type Length l [mm] | Type Length l [mm] | Type Length l [mm] | Type Length l ₁ [mm] | | | | |
| | | | | | | | | | | ML - 120 ML - 180 | ML 1 - 185 ML 1 - 245 | MLQ-D - 120 MLQ-D - 180 | MLQ-E - 120 MLQ-E - 180 |
|  HTA-CE 38/17 L = 1050 mm ^① L = 6070 mm ^①  |  BL Standard 30 × 2 [mm] |  BLQ - D Double-sided 30 × 3 [mm] |  BLQ - E One-sided 30 × 3 [mm] | Material:  <ul style="list-style-type: none"> FV = Steel S235JR, hot-dip galvanised SV = Steel DX51D + Z275, Sendzimir galvanised A4 = Stainless steel 1.4571/1.4404 A2 = Stainless steel 1.4301 | | | | | | | | | |
| | | | | BL - 85 | BLQ-D - 85 | BLQ-E - 85 | ① Other lengths: Available on request | | | | | | |
| | | | | BL - 120 | BLQ-D - 120 | BLQ-E - 120 | | | | | | | |
| | | | | BL - 180 | BLQ-D - 180 | BLQ-E - 180 | | | | | | | |


Firewall connection according to DIN 4102-4 : 2016-05

Solid masonry fire walls

Statically required connections of load bearing, room-enclosing, masonry walls can also be designed as fire walls in accordance DIN 4102-4 section 9.8.4 using HALFEN Brick tie channels. The anchorage to adjacent components (steel reinforced concrete supports or walls) meet the requirements for stability and fire resistance if the anchorage conforms to the standards set in DIN 4102-4 section 9.8.4 (figure 9.13, variant 2).

Anchor spacings

HALFEN Brick tie anchors can be used at any position along the whole length of the brick tie channel. Generally the standard spacing between the anchors is 250 mm (4 anchors per metre).

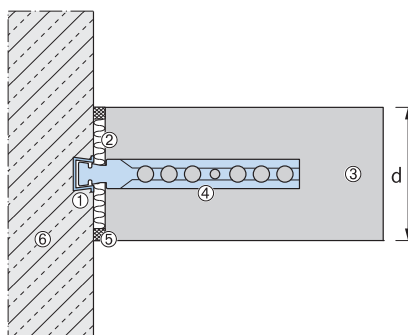


Definition, DIN regulations

- ① **HALFEN Cast-in channel**
- ② **Insulation layer:**
According to DIN 4102-4 section 9.2.14 insulation layers in connecting joint gaps must, "[...] be made of non-flammable mineral fibre; have a melting point $\geq 1000^{\circ}\text{C}$ as stated in DIN 4102-17; and have a gross density of $\geq 30 \text{ kg/m}^3$ and must not smoulder.
- ③ **Masonry:**
Bricks (gross density class) and minimum wall thickness according to DIN EN 1996-1-2: 2011-04.
- ④ **Masonry connection** (vertically adjustable)
- ⑤ **Expansion joint**
- ⑥ **Concrete**

Product information

| HALFEN Cast-in channel Type ① | ④ Brick tie anchor | |
|----------------------------------|--------------------|-----------------|
| | for standard grout | for thin mortar |
| HMS 25/15 D | ML | ML 1 |
| HTA 28/15 | ML | ML 1 |
| HTA 38/17 | BL | - |



Connection of a load bearing masonry wall as a firewall according to DIN 4102-4 section 9.8.4 (figure 9.13) or according to DIN EN 1996-1-2: 2011-04 (figure E.4B)

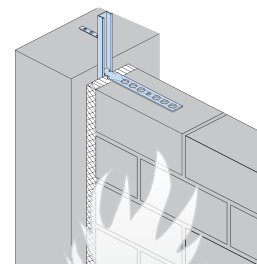

ROOF AND WALLS

HALFEN Anchor Bolt Systems


HL slotted framing channels anchored to concrete or masonry

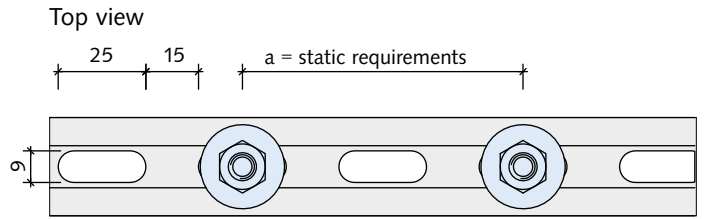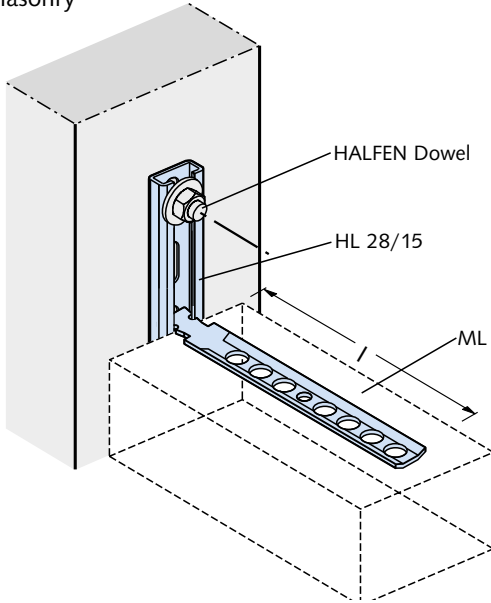

ETA 17/0196 (brickwork) and ETA 16/0691 (concrete)/ Injection system HB-VMU plus




For more information on application and assembly see the Technical Product Information catalogue, **HALFEN HB Anchor bolt systems**

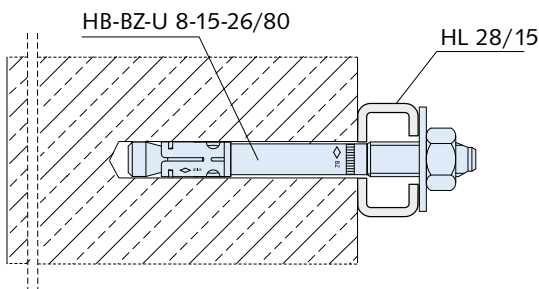


Bolt anchor HB-BZ-U 8-15-26/80

- galvanized or (A4) stainless steel
- approved for cracked and uncracked concrete
- with large washer DIN 9021/EN ISO 7093

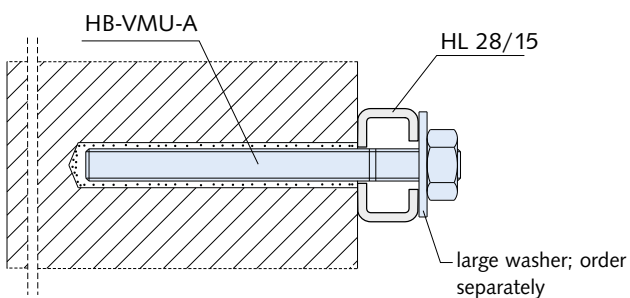

Anchor rod HB-VMU-A 8-20/110

- galvanized or (A4) stainless steel
- approved for **monolithic masonry**
- with large washer DIN 9021/EN ISO 7093 (order separately)
- mortar cartridge HB-VMU plus 280 and static mixer (order separately)


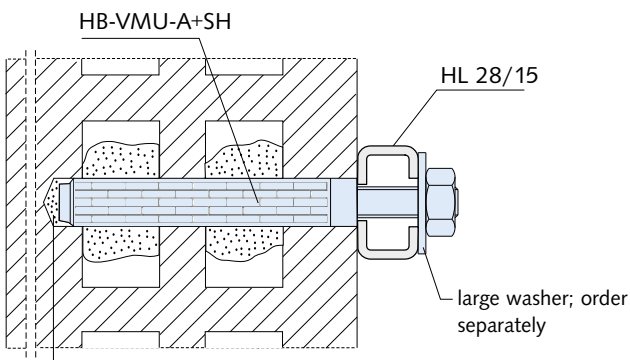


Anchor rod HB-VMU-A 8-20/110 with Perforated sleeve HB-VMU-SH 16x85

- galvanized or (A4) stainless steel
- approved for **perforated brick masonry**
- with large washer DIN 9021/EN ISO 7093 (order separately)
- mortar cartridge HB-VMU plus 280 and static mixer (order separately)

ROOF AND WALLS

Restraint with Turnbuckle SPV

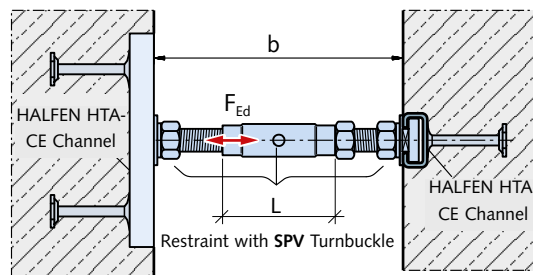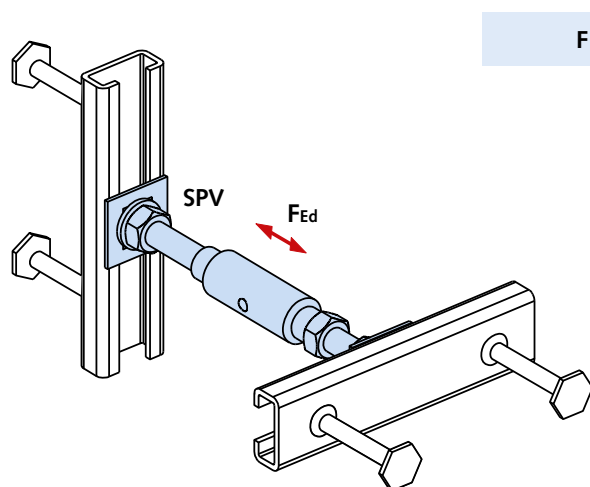

Ensure adequate
screw depth:


M12 → ≥ 10 mm

M16 → ≥ 13 mm

Product description

The restraint with turnbuckle SPV is suitable for compressive and tensile loads up to $F_{Ed} = 14.0$ kN and for clearances up to 200 mm. By turning the clamping sleeve (sleeve has a right and left-hand thread), the clearance can be freely adjusted within the given range. Connected to the building structure using HALFEN Cast-in channels (order separately).

Included in delivery



- Turnbuckle SPH
- 2 HALFEN Bolts
(1 right-hand thread, 1 left-hand thread)
- 3 standard nuts
- 2 washers and 2 SIC locking washers

Ordering example:

Item name: **SPV - 7,0 - 100 - A4**

type

load group

wall clearance b

material / finish



HALFEN Cast-in channels
must be ordered separately

| HALFEN SPV Restraint with turnbuckle | | | | | | | | | | |
|--------------------------------------|--------------------|------------------------------|--------|-------------------------------|------------------------------|--------|-------------------------------|------------------------------|--------|-------------------------------|
| Load capacity F_{Rd} [kN] | | ± 7.0 | | | ± 9.8 | | | ± 14.0 | | |
| Type | Stand-off distance | HALFEN Bolt left-hand thread | Sleeve | HALFEN Bolt right-hand thread | HALFEN Bolt left-hand thread | Sleeve | HALFEN Bolt right-hand thread | HALFEN Bolt left-hand thread | Sleeve | HALFEN Bolt right-hand thread |
| | b [mm] ② | M12 [mm] | L [mm] | M12 [mm] | M16 [mm] | L [mm] | M16 [mm] | M16 [mm] | L [mm] | M16 [mm] |
| SPV | 100±10 | 50 | 60 | 40 | 50 | 60 | 40 | - | - | - |
| | 120±15 | 50 | 75 | 40 | 50 | 75 | 40 | - | - | - |
| | 140±15 | 50 | 75 | 60 | 50 | 75 | 60 | 80 | 60 | 50 |
| | 160±15 | 50 | 95 | 60 | 50 | 95 | 60 | 80 | 75 | 60 |
| | 180±15 | 50 | 115 | 60 | 50 | 115 | 60 | 80 | 95 | 60 |
| | 200±15 | 50 | 135 | 60 | 50 | 135 | 60 | 80 | 115 | 60 |
| HALFEN Cast-in channel | | HTA-CE 38/17 ① | | | HTA-CE 38/17 ① | | | HTA-CE 49/30 ① | | |


① Short elements 150, 200 and 250 ② With F_{Rd} -load group 9.8 kN restricted to negative tolerance



For further concrete façades accessories
see the **FB Concrete Façade catalogue**


ROOF AND WALLS

Restraint Tie HKZ

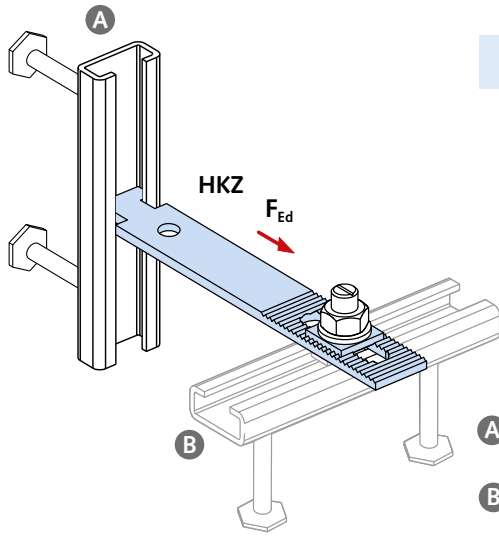

$F_{Ed} = \text{load}$

- A** HALFEN Channel suitable for HKZ-Restraint ties
- B** HALFEN Channel or dowel according to approval

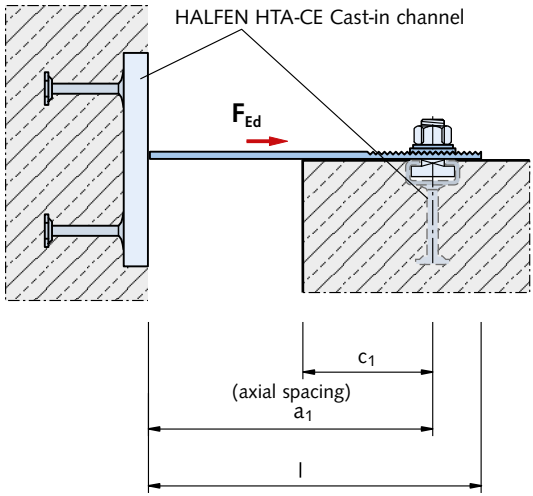

Product characteristics

The serrations in the bracket and in the washer ensure positive static load transmission.

Two HALFEN Cast-in channels embedded at right angle in the concrete ensure three-dimensional adjustability.

Please order HALFEN Cast-in channels and HALFEN Bolts and washers separately

Ordering example:



Item name: **HKZ-38/17 - 100 - A4**
 type —————
 clearance a_1 —————
 material / finish —————

| HALFEN HKZ Restraint tie | | | | | | | |
|---|---|----------------------|---|------------|-----------------|---------------------|--------------------------------|
| Characteristics: ① Load capacity F_{Rd} [kN] | Type selection: GV = galvanized. Not suitable for façades with ventilation gaps | | Type selection: A4 = Stainless steel grade 1.4571/1.4404 | | Dimensions | | |
| | Type | a_1 [mm] | Type | a_1 [mm] | Length l [mm] | Spacing a_1 [mm] | Holes [mm] |
| +4.9 (tension only) | HKZ 28/15 - 50 - GV | | HKZ 28/15 - 50 - A4 | | 90 | 50 | $a_1 \pm 20$ LL 11 × 55 |
| | HKZ 28/15 - 75 - GV | | HKZ 28/15 - 75 - A4 | | 115 | 75 | |
| | HKZ 28/15 - 100 - GV | | HKZ 28/15 - 100 - A4 | | 140 | 100 | |
| | HKZ 28/15 - 125 - GV | | HKZ 28/15 - 125 - A4 | | 165 | 125 | |
| | HKZ 28/15 - 150 - GV | | HKZ 28/15 - 150 - A4 | | 190 | 150 | |
| | HKZ 28/15 - 175 - GV | | HKZ 28/15 - 175 - A4 | | 215 | 175 | |
| | HKZ 28/15 - 200 - GV | | HKZ 28/15 - 200 - A4 | | 240 | 200 | |
| | HKZ 28/15 - 225 - GV | | HKZ 28/15 - 225 - A4 | | 265 | 225 | |
| +9.8 (tension only) | HKZ 28/15 - 250 - GV | | HKZ 28/15 - 250 - A4 | | 290 | 250 | $a_1 \pm 20$ RL 11 |
| | HKZ 38/17 - 75 - GV | | HKZ 38/17 - 75 - A4 | | 115 | 75 | |
| | HKZ 38/17 - 100 - GV | | HKZ 38/17 - 100 - A4 | | 140 | 100 | |
| | HKZ 38/17 - 125 - GV | | HKZ 38/17 - 125 - A4 | | 165 | 125 | |
| | HKZ 38/17 - 150 - GV | | HKZ 38/17 - 150 - A4 | | 190 | 150 | |
| | HKZ 38/17 - 175 - GV | | HKZ 38/17 - 175 - A4 | | 215 | 175 | |
| | HKZ 38/17 - 200 - GV | | HKZ 38/17 - 200 - A4 | | 240 | 200 | |
| | HKZ 38/17 - 225 - GV | | HKZ 38/17 - 225 - A4 | | 265 | 225 | |
| | HKZ 38/17 - 250 - GV | | HKZ 38/17 - 250 - A4 | | 290 | 250 | |
| HKZ 38/17 - 275 - GV | | HKZ 38/17 - 275 - A4 | | 315 | 275 | | |
| HKZ 38/17 - 300 - GV | | HKZ 38/17 - 300 - A4 | | 340 | 300 | LL 13 × 55 RL 13 | |

① The load capacities apply for the HKZ-restraint ties. The channel **A** and the fixing dowel/channel **B** must be verified, depending on the edge distance c_1 , the concrete grade and the reinforcement, for each application.

ROOF AND WALLS

Restraint Tie HKZ - GF/GU

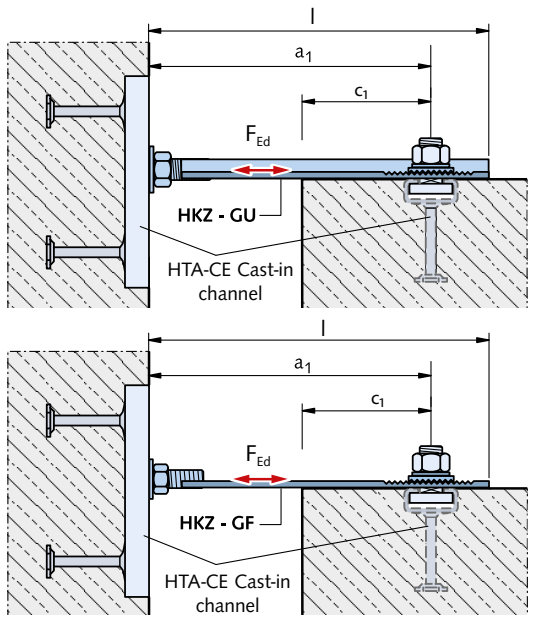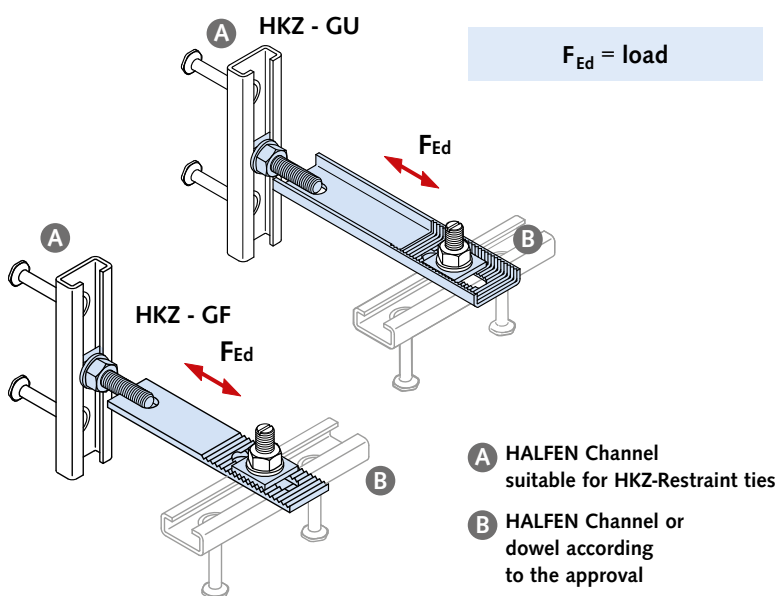

Product description

The serrations in the bracket and in the washer ensure positive static load transmission.

! Please order HALFEN Cast-in channels and HALFEN Bolts and washers separately.

The double-sided attachment using a HALFEN Bolt and a threaded plate ensures positive and slippage-free wind anchoring when used in combination with HALFEN HTA-CE Cast-in channels set in concrete; the connection is three-dimensionally adjustable.

Ordering example:

Item name: **HKZ - GF 38/17 - 125 - GV**
 type ————
 axial spacing a_1 ————
 material/ GV/A4 ————

| HALFEN Restraint ties, type HKZ-GF and type HKZ-GU | | | | | | | | |
|--|-------------------------------|---|--|------------|-----------------|--------------------|----------------|-----------|
| Characteristics: | Type selection: | | Type selection: | | Dimensions: | | | |
| | ① Load capacity F_{Rd} [kN] | GV = galvanized not suitable for façades with ventilation gap Type | A4 = Stainless steel 1.4571/1.4404 Type | a_1 [mm] | Length l [mm] | Spacing a_1 [mm] | Tolerance [mm] | Slot [mm] |
| ±4.9 | | HKZ - GF 28/15 - 75 - GV | HKZ - GF 28/15 - 75 - A4 | | 115 | 75 | $a_1 \pm 20$ | 11 × 55 |
| | | HKZ - GF 28/15 - 100 - GV | HKZ - GF 28/15 - 100 - A4 | | 140 | 100 | | |
| | | HKZ - GF 28/15 - 125 - GV | HKZ - GF 28/15 - 125 - A4 | | 165 | 125 | | |
| | | HKZ - GF 28/15 - 150 - GV | HKZ - GF 28/15 - 150 - A4 | | 190 | 150 | | |
| | | HKZ - GF 28/15 - 175 - GV | HKZ - GF 28/15 - 175 - A4 | | 215 | 175 | | |
| ±9.8 | | HKZ - GF 38/17 - 100 - GV | HKZ - GF 38/17 - 100 - A4 | | 140 | 100 | $a_1 \pm 20$ | 13 × 55 |
| | | HKZ - GF 38/17 - 125 - GV | HKZ - GF 38/17 - 125 - A4 | | 165 | 125 | | |
| | | HKZ - GF 38/17 - 150 - GV | HKZ - GF 38/17 - 150 - A4 | | 190 | 150 | | |
| | | HKZ - GF 38/17 - 175 - GV | HKZ - GF 38/17 - 175 - A4 | | 215 | 175 | $a_1 \pm 20$ | 13 × 55 |
| | | HKZ - GU 38/17 - 200 - GV | HKZ - GU 38/17 - 200 - A4 | | 240 | 200 | | |
| | | HKZ - GU 38/17 - 225 - GV | HKZ - GU 38/17 - 225 - A4 | | 265 | 225 | | |
| ±16.8 | | HKZ - GU 38/17 - 250 - GV | HKZ - GU 38/17 - 250 - A4 | | 290 | 250 | $a_1 \pm 20$ | 17 × 60 |
| | | HKZ - GU 50/30 - 200 - GV | HKZ - GU 50/30 - 200 - A4 | | 240 | 200 | | |
| | | HKZ - GU 50/30 - 225 - GV | HKZ - GU 50/30 - 225 - A4 | | 265 | 225 | | |
| | | HKZ - GU 50/30 - 250 - GV | HKZ - GU 50/30 - 250 - A4 | | 290 | 250 | | |
| | | HKZ - GU 50/30 - 275 - GV | HKZ - GU 50/30 - 275 - A4 | | 315 | 275 | | |
| | HKZ - GU 50/30 - 300 - GV | HKZ - GU 50/30 - 300 - A4 | | 340 | 300 | | | |


① The load capacities apply for the HKZ-restraint ties. The channel **A** and the fixing dowel/channel **B** must be verified, depending on the edge distance c_1 , the concrete grade and the reinforcement, for each application.

ROOF AND WALLS


HVL Precast Connection

Assembly:

The connecting strap is delivered ready to be installed: The bolt fastening sets and the counter plate are pre-assembled for fast installation.

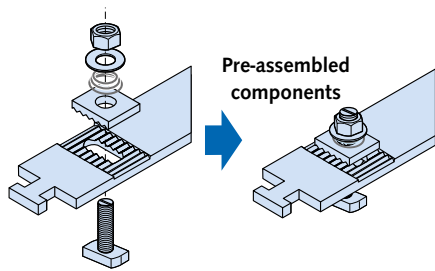

Installation component 2, cast-in channel HTA-CE 38/17 - 150

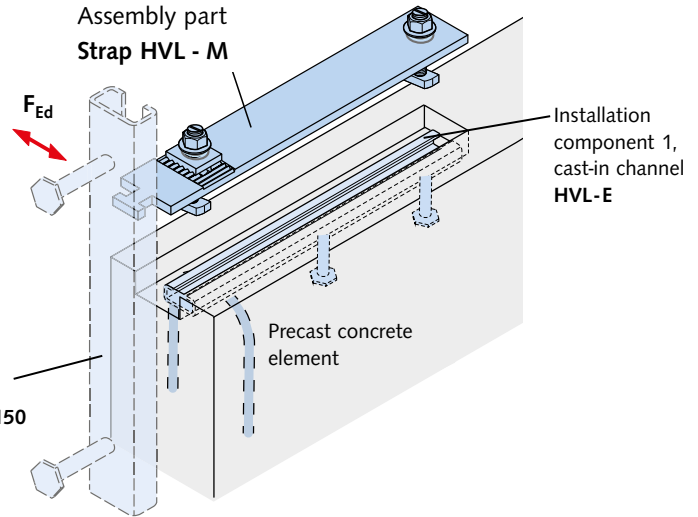

Assembly part HVL-M

Pre-assembled, consisting of:

- serrated hammer-head strap
- 1 serrated counter plate
- 2 bolt sets (Bolt HS 38/17 - M12 × 50 + washer+ tapered compressed spring)

Installation component 1 HVL-E:

HALFEN Cast-in channel HTA 38/17-300-SK with 2 bolt anchors and one loop end anchor.


Installation component 2:

HALFEN Cast-in channel HTA-CE 38/17-150 with 2 bolt anchors.

Corrosion protection


- hammer-head strap, cast-in channel: hot-dip galvanized
- HALFEN Bolts, nuts, washers and springs: galvanized

These parts are covered by mortar after installation.

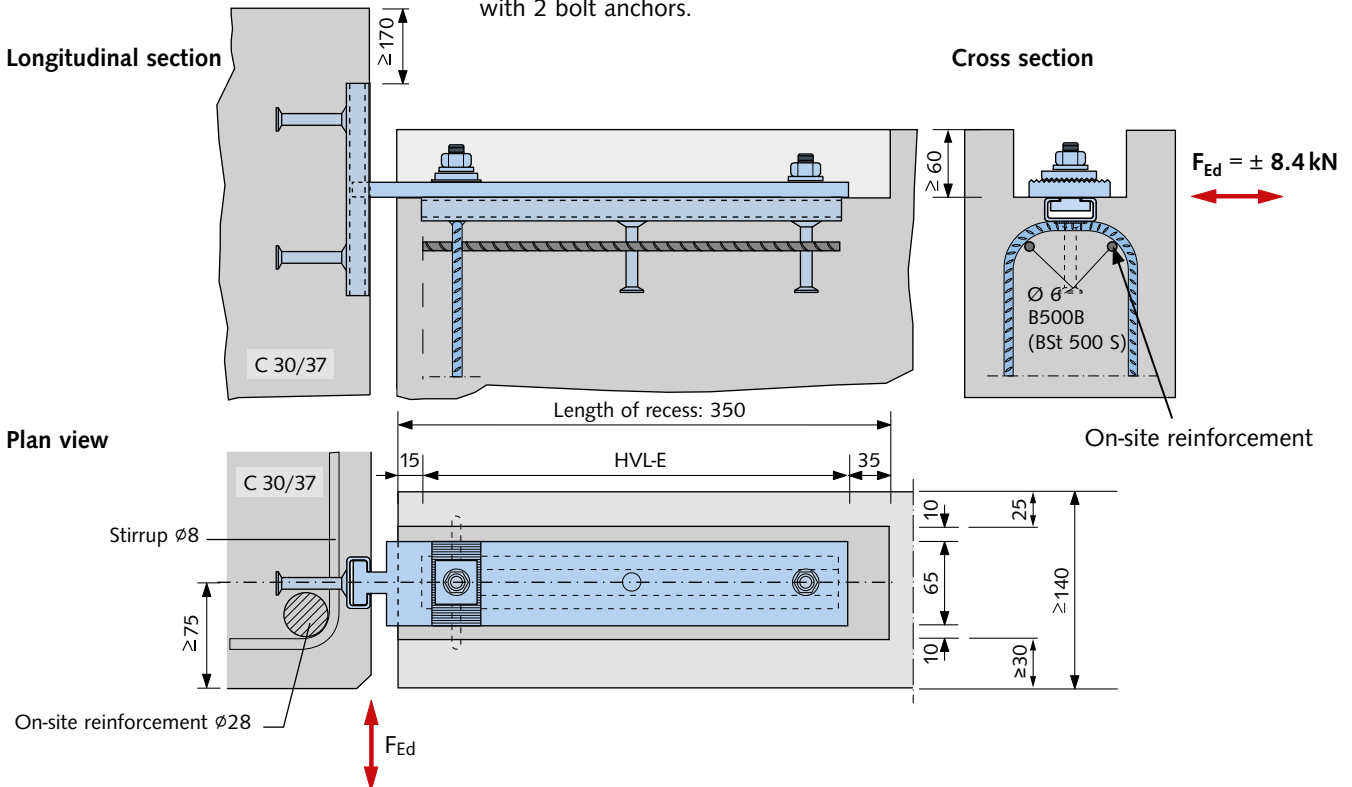


ROOF AND WALLS

HALFEN HKW Corner Guard

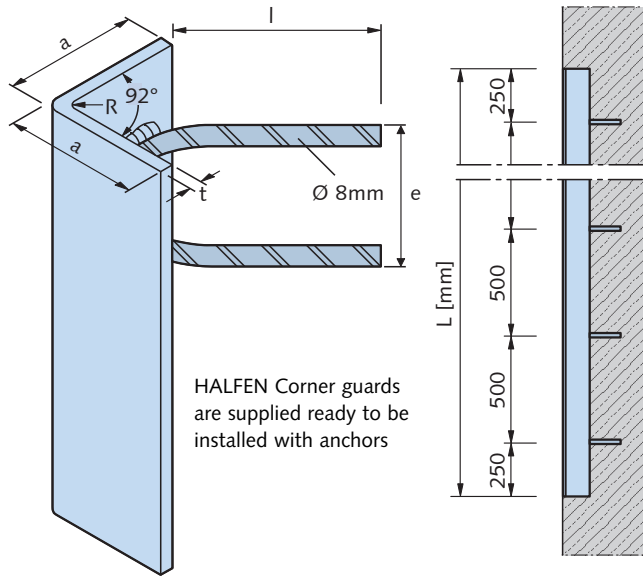

Column edge, typical cross-section

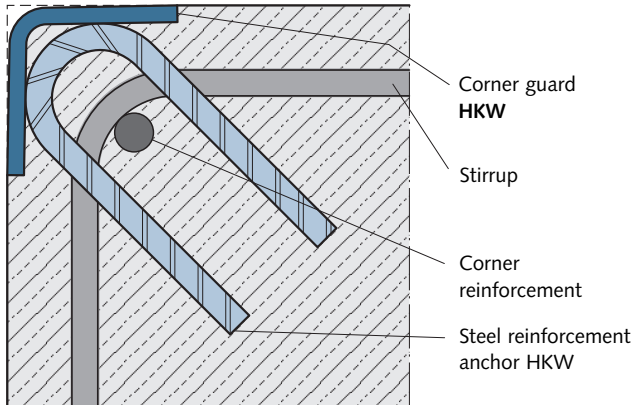

Advantages:

- 92° angle ensures a tight fit to the formwork. This prevents concrete seeping between the formwork and the corner profile, resulting in a smoother finish
- U-shaped concrete reinforced anchors do not restrict the corner reinforcement and allow easy installation of the reinforcement
- anchors are of reinforcement steel quality to guarantee optimal anchorage
- competitive pricing through serial production

| Corner guard HKW | | | | | | | |
|------------------|----------|---------------|------------------|-------------------------|----------------------|------------|--------|
| Type selection: | | | Material/Finish: | | Anchor dimensions | Radius | |
| Type | a/t [mm] | Length L [mm] | no. of anchors | FV = hot-dip galvanized | A2 = Stainless steel | l × e [mm] | R [mm] |
| HKW 50/5 - | | 500 / 2 | 2 | FV | A2 | 75 × 55 | 6 |
| | | 750 / 2 | 2 | FV | A2 | | |
| | | 1000 / 2 | 2 | FV | A2 | | |
| | | 1500 / 3 | 3 | FV | A2 | | |
| | | 2000 / 4 | 4 | FV | A2 | | |
| HKW 80/6 - | | 500 / 2 | 2 | FV | A2 | 100 × 85 | 8 |
| | | 750 / 2 | 2 | FV | A2 | | |
| | | 1000 / 2 | 2 | FV | A2 | | |
| | | 1500 / 3 | 3 | FV | A2 | | |
| | | 2000 / 4 | 4 | FV | A2 | | |
| HKW 100/8 - | | 500 / 2 | 2 | FV | A2 | 110 × 85 | 16 |
| | | 750 / 2 | 2 | FV | A2 | | |
| | | 1000 / 2 | 2 | FV | A2 | | |
| | | 2000 / 4 | 4 | FV | A2 | | |

Material/Finish:

■ FV = Corner profile: Steel hot-dip galvanized 1.0038

Anchor: B500B (BSt 500 S)

■ A2 = Corner profile: Stainless steel 1.4307

Anchor: B500B/A NR

Ordering example:


HKW 50/5 - A2 - 2000/4

- length/no. of anchors
- material/finish
- type/profile

HALFEN CURTAIN WALL SYSTEM

The benefits at a glance

Modern buildings require façades of the highest quality that can be installed quickly and safely. This is the reason the HALFEN Curtain Wall System is chosen more and more frequently by architects and investors.

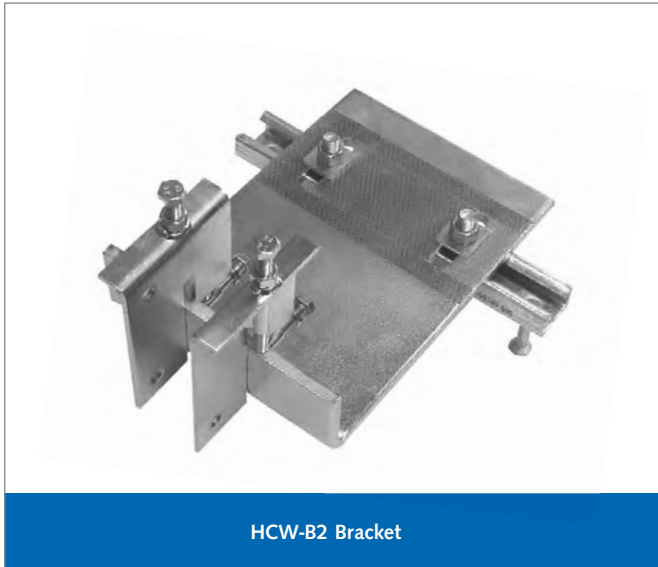


HCW-B2 Bracket

For modular façades. Anchored to the top surface of floor slabs.


Fast and cost-effective

- › 3-dimensional adjustable connection when used with cast-in channels
- › uses bolts instead of welding
- › fast assembly reduces installation time

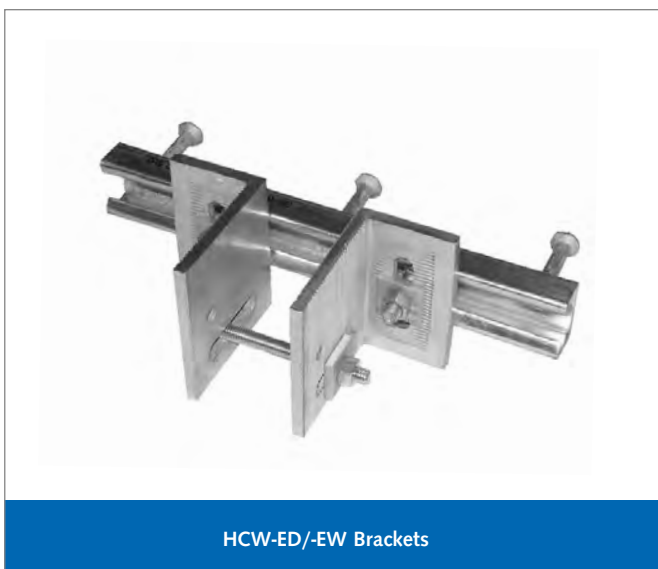

HCW-ED/-EW Brackets

For post and beam façades. Anchored to the edges of slabs.

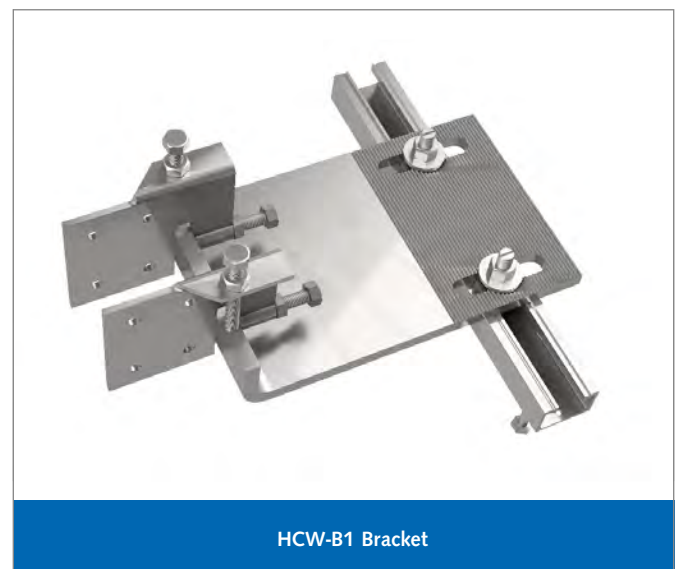


HCW-B1 Bracket

For post and beam façades. Anchored to the top surface of floor slabs.

HALFEN CURTAIN WALL SUPPORT SYSTEMS


Application Examples

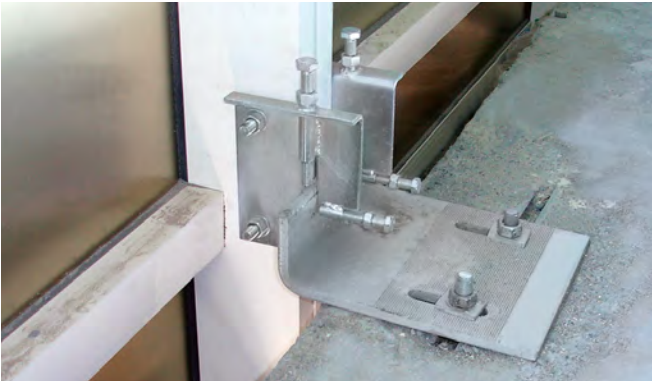

Fixing of a curtain wall system using HCW-B2 Brackets connected to HTA-CE Cast-in channels



Liberty Life, Johannesburg

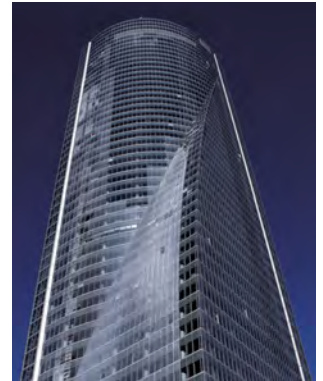

Torre Espacio, Madrid



Fixing of a post and beam façade using HCW-ED Brackets on HTA-CE Cast-in channels



Post office Tower, Bonn



Sage Centre, Gateshead




Fixing of a modular façade using HCW-ED Brackets on HTA-CE Cast-in channels




Burj Khalifa, Dubai




Edificio Gas Natural, Barcelona

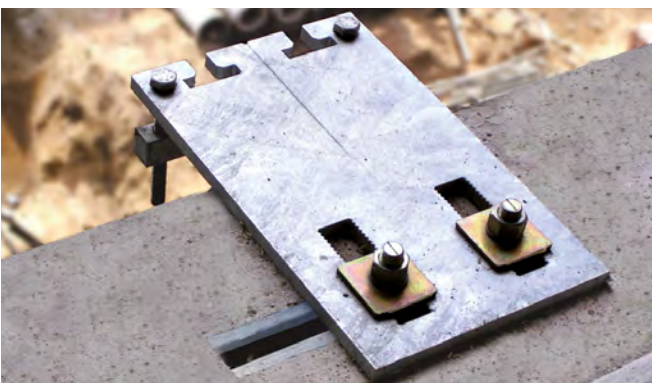

Typical curtain wall fixing with HTA-CE Cast-in channels

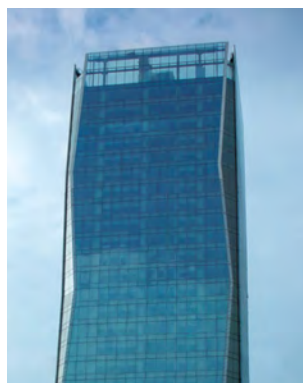

Westin Libertador Hotel, Lima

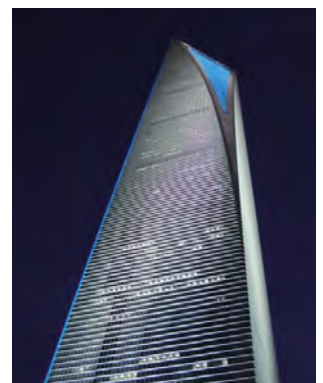

World Financial Center, Shanghai

HALFEN CURTAIN WALL SUPPORT SYSTEMS

General

HALFEN Curtain wall system

This type of construction is characterized by an outer wall with a continual outer skin (see figure 1).

The façade is attached to the main structure of the building using only the required number of point-load connections.

Curtain wall façades protect the interior of buildings from external, unwanted environmental influences whilst still

permitting visual contact with the outside environment with structural components that can be opened or are transparent. Specifically, this includes sufficient stability against wind loads, adequate insulation against frost in winter, heat in summer as well as against external noise.

In addition, various requirements must be met to protect against fire and other critical situations.

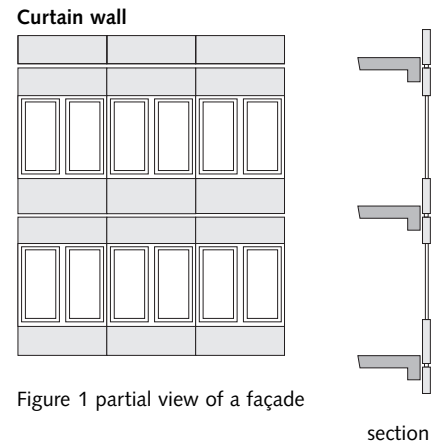


Figure 1 partial view of a façade

Post and beam façade and the modular façade


Basically, we distinguish between two methods of curtain wall façades:

- the **post and beam façade**
- and the **modular façade**.

Post and beam façade


One basic distinctive difference is the way expansion in the façade is distributed (for example; thermal expansion). With the post and beam façade (see figure 2) the vertical and horizontal frame supports are installed in spacings corresponding to the façade elements. The supports are installed with an expansion gap between components allowing for sufficient expansion.

Post and beam façade

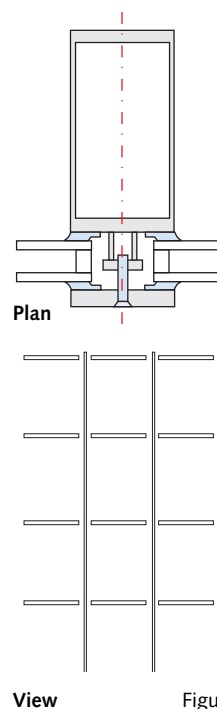

View Figure 2

Modular façade

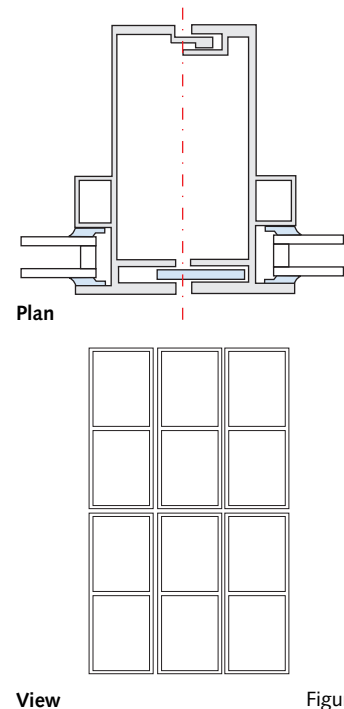

View Figure 3

Modular façade

With the modular façade method (see figure 3), the façade is made of prefabricated elements, in which glass, natural stone or infills are pre-installed. The façade profiles are designed as a key and slot system to allow for expansion.

This method provides immediate weather protection and allows the building contractor to start interior work on the respective floor directly after the prefabricated modules have been installed.


Scaffolding is not required with this method of construction.

HALFEN CURTAIN WALL SUPPORT SYSTEMS

Product range


Load conditions and required HALFEN Cast-in channels

Standard slab thickness
with standard tensile and transverse tensile loads
HALFEN Channels with bolt anchors and weld-on I-anchors

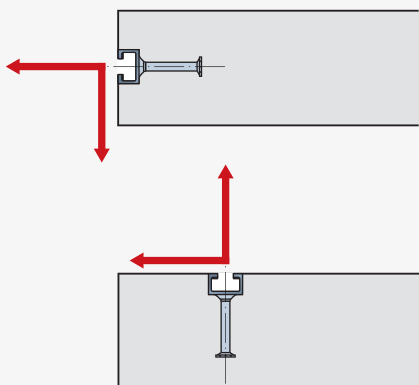


see pages 16-26

Hot-rolled serrated channels and bolts

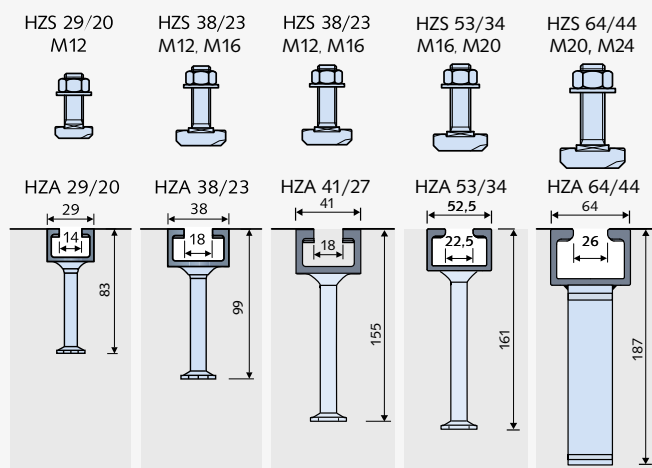

Thin slabs (thickness ≥ 12.5 cm)
with high transverse tensile loads
and small edge distance
HALFEN Curtain wall channel
HCW 52/34
(not included in the HTA-CE approval)

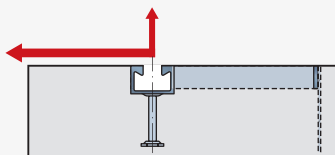


see pages 80-81


HCW 52/34 and bolt

HS 50/30, M16, M20


Grade 8.8



HCW 52/34

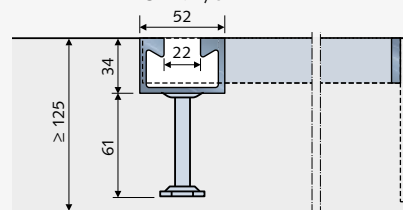


Thin slabs (thickness ≥ 10 cm)
with high tension loads
HALFEN Channels HTA-R or HZA-R
with rebar anchors
(not included in the HTA-CE and
HZA approvals)

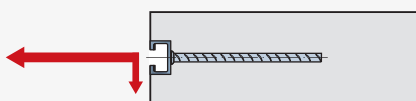

see page 82


Hot-rolled serrated channels with rebar anchors and bolts

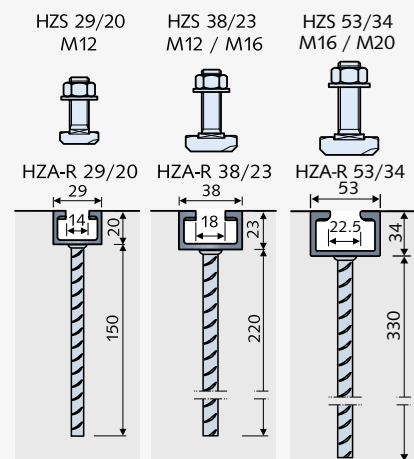



HALFEN CURTAIN WALL SUPPORT SYSTEMS

Product Range

Hot-rolled (standard) channels and bolts

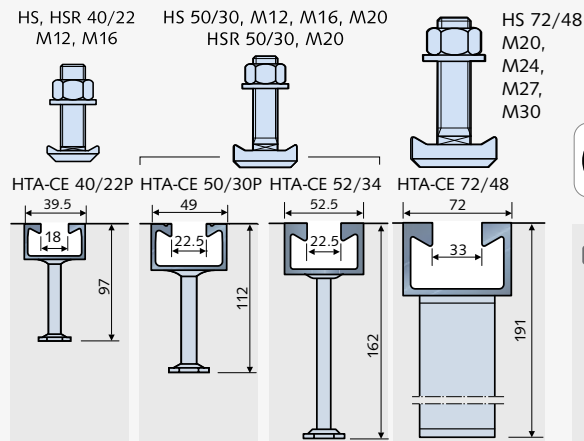


Cold-rolled (standard) channels and bolts

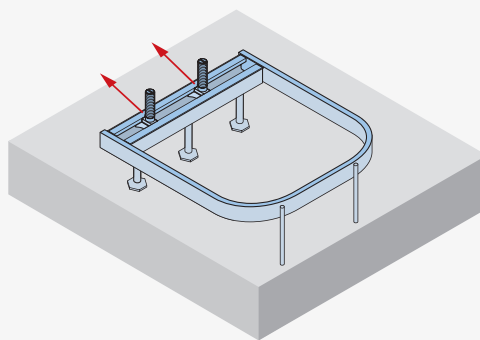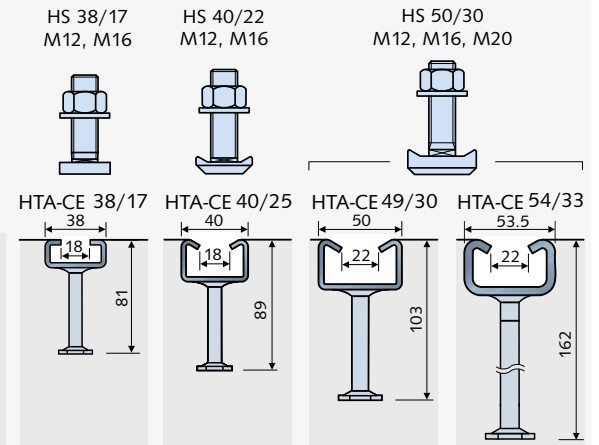


HCW 52/34 with bolts and bracket

Hot-rolled (smooth) channels with rebar anchors and bolts

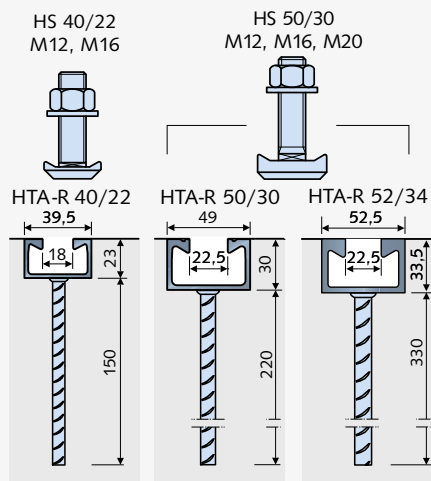


Cold-rolled (smooth) channels with rebar anchors and bolts

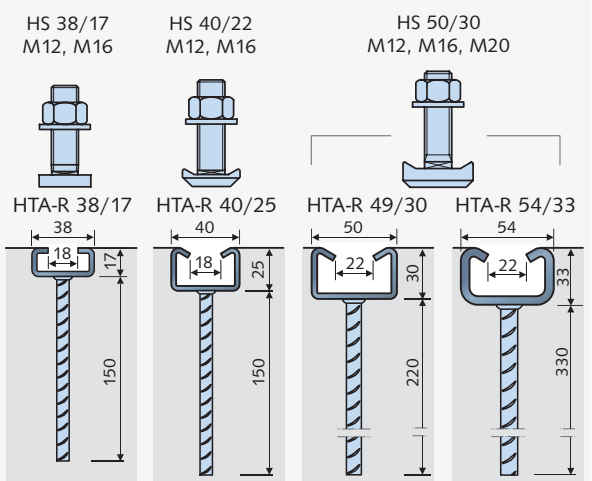

HALFEN CURTAIN WALL SUPPORT SYSTEMS


HALFEN Channel HCW 52/34

Typical installation

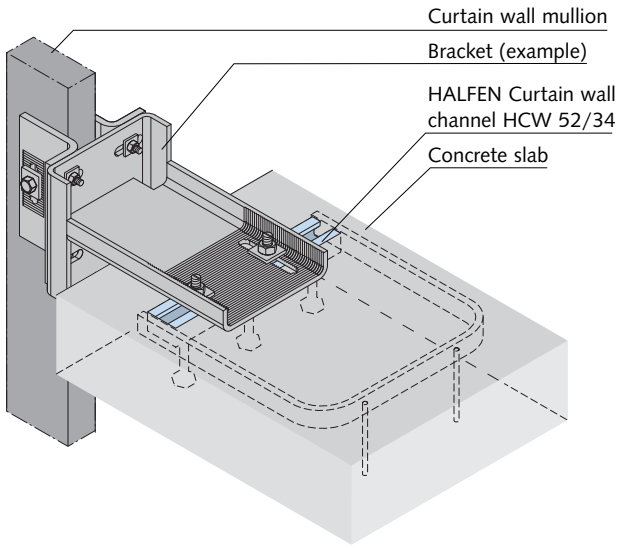


Product description

Identification: HCW 52/34
Material: hot-dip galvanized

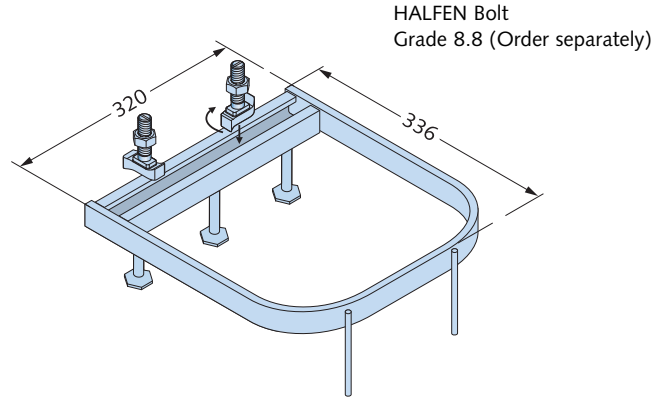


Dimensions in [mm]

Reinforcement requirements

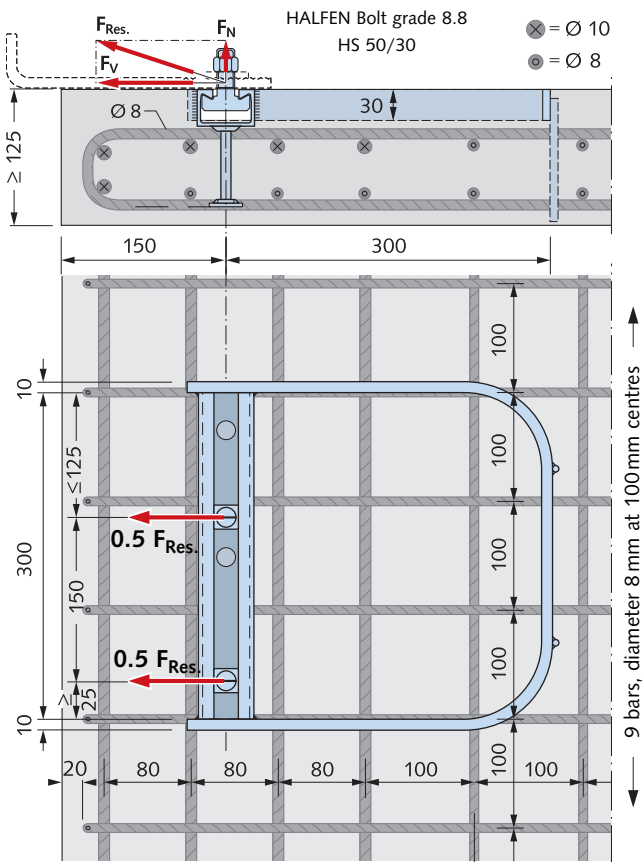

Edge and element spacing

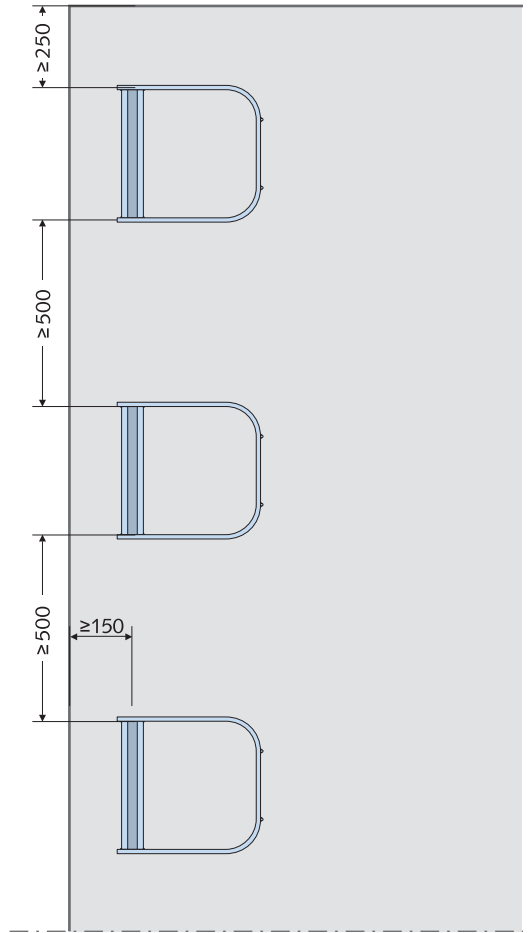

Note: HALFEN Channel HCW 52/34 is not included in the HTA-CE approval.

HALFEN CURTAIN WALL SUPPORT SYSTEMS

HALFEN Cast-in Channel HCW 52/34

Channel load data

The following load failure were averaged from three tests:

| | | |
|---------------------------|---|-----------------------------------|
| $F_{V \text{ failure}}$ | = | 142.3 kN |
| $F_{N \text{ failure}}$ | = | 47.4 kN |
| $F_{\text{res, failure}}$ | = | $\sqrt{F_N^2 + F_V^2}$ = 150.0 kN |

The load deformation diagram (see right) may be used to determine allowable loads based on acceptable displacement and the required safety factor according to local building codes. The diagram is based on the following:

- tensile and transverse loads were increased at a ratio of 1:3 up to breaking point
- concrete slab thickness ≥ 125 mm and reinforcement as shown on page 78
- concrete strength class $\geq C 20/25$ N/mm²
- load is transferred into the channel via two HALFEN Bolts HS 50/30 M20 Grade 8.8. The bolt spacing is 150 mm. A sample calculation is shown below.

The safety factor is freely selected. However, it must be determined which factors are actually to be implemented, whether these are based on project specific boundary condition or on valid building regulations.

Calculation example: Assumed safety factor $v = 3$
(failure test load / working load)

Average failure load from the tests:

| | | | |
|----------------------------|----------------------------|---|----------|
| Transverse tensile stress | $F_{V \text{ ultimate}}$ | = | 142.3 kN |
| Tensile stress | $F_{N \text{ ultimate}}$ | = | 47.4 kN |
| Res. diagonal tensile load | $F_{\text{res, ultimate}}$ | = | 150.0 kN |

Actual working loads at bolts (specification by façade engineer):

| | |
|---------------------------|---------------|
| Transverse tensile stress | $F_V = 35$ kN |
| Tensile stress | $F_N = 10$ kN |

Allowable load with $v = 3$ against average ultimate load from tests:

| | | |
|------------------------|---|-----------------------|
| perm. F_V | = | $142.3 / 3 = 47.4$ kN |
| perm. F_N | = | $47.4 / 3 = 15.8$ kN |
| perm. F_{res} | = | $150 / 3 = 50.0$ kN |

Control: Working load $F_V = 35$ kN < 47.4 kN


Working load $F_N = 10$ kN < 15.8 kN

Working load $F_{\text{res}} = \sqrt{(10)^2 + (35)^2} = 36.4$ kN < 50 kN

Displacement at working load < 1 mm (see diagram).

Actual safety factor for average ultimate load $\gamma_1 = (150 / 36.4) = 4.12$.

Load deformation diagram

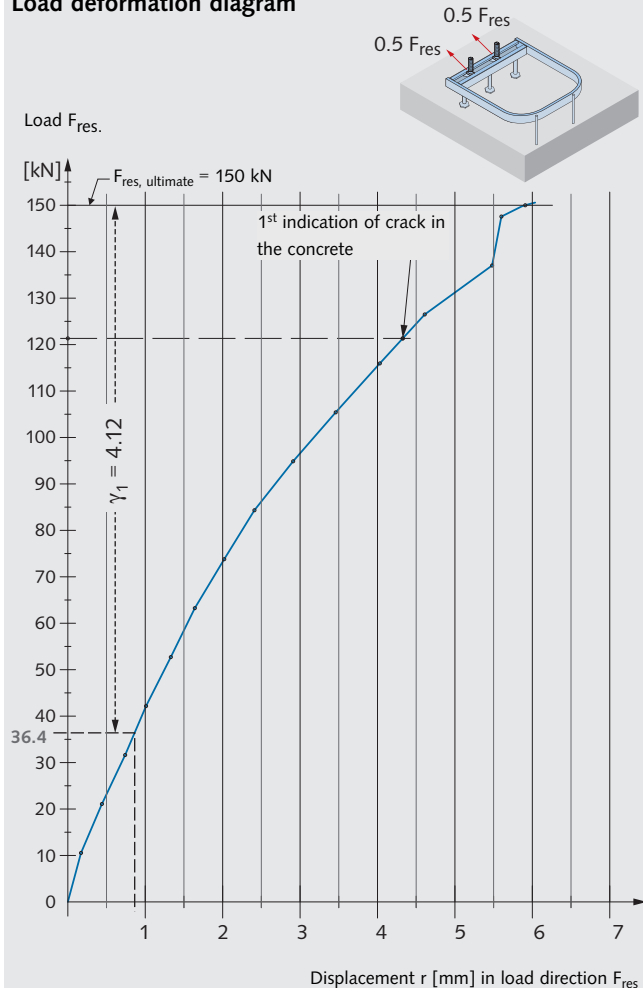

Corresponding HALFEN Bolts HS 50/30

Depending on the load size, we also recommend using HALFEN Bolts HS 50/30 M16 or M20, grade 8.8 in combination with HALFEN Cast-in channel HCW 52/34. The bolts stated below are hot-dip galvanized. Other bolt

sizes and materials can be supplied. Please contact us for detailed information. Addresses can be found at the back of this catalogue.

Type selection HALFEN Bolts HS 50/30 FV Grade 8.8

| Thread | Material grade | Available length L [mm] | Allowable resulting bolt load (all directions) perm. F_s [kN] | Allowable bending moment [Nm] | Recommended torque [Nm] | If the bolt is stressed in the direction of a slot its load capacity must be verified taking bolt flexure into account. |
|--------|----------------|-------------------------|---|-------------------------------|-------------------------|---|
| M 16 | 8.8 | 40, 60, 80, 100 | 36.1 | 111 | 60 | |
| M 20 | 8.8 | 45, 60, 80, 100 | 56.4 | 216 | 120 | |

HALFEN CURTAIN WALL SUPPORT SYSTEMS

HALFEN Cast-in Channels with Rebar Anchor HTA-R and HZA-R

Design basics

Structural analysis

Material resistance shear

Material resistance Design load

Material resistance tension

Material resistance resulting diagonal pull

V_{yRd}

N_{Rd}


F_{Rd}

$\geq V_{yEd}$

$\geq N_{Ed}$





$\geq F_{Ed}$

$$= \sqrt{N_{Ed}^2 + V_{y,Ed}^2}$$

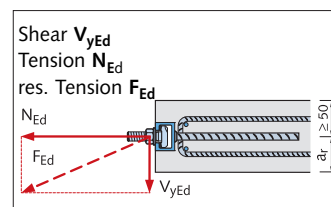

HALFEN Channels HTA-R and HZA-R – Design values for material resistance

The minimum edge distance shown in the table applies to reinforced concrete

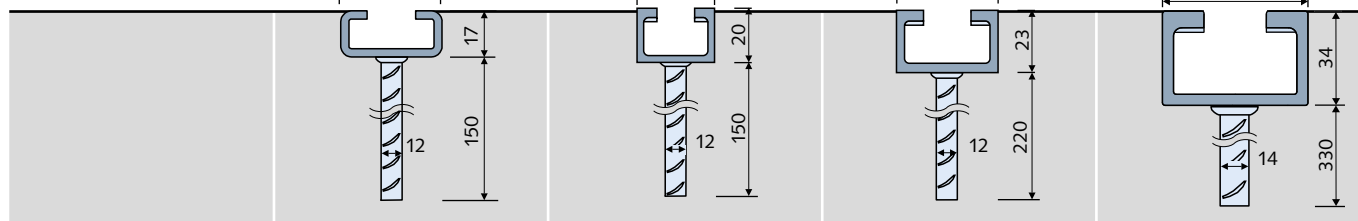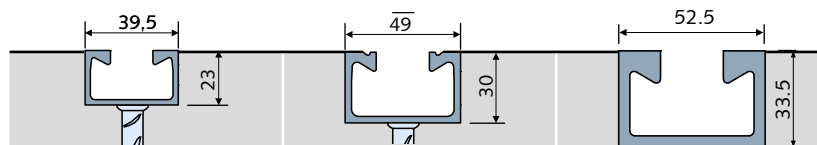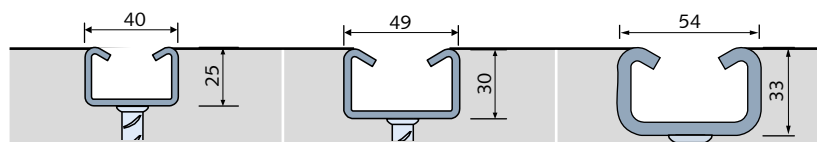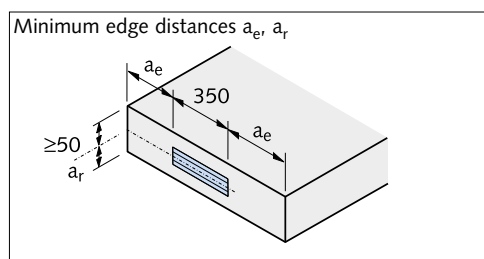

| HALFEN Cast-in channel type | HTA-R 38/17 ② | HTA-R 40/25 ② HTA-R 40/22 ② HZA-R 29/20 ③ | HTA-R 49/30 ② HTA-R 50/30 ② HZA-R 38/23 ③ | HTA-R 54/33 ③ HTA-R 52/34 ③ HZA-R 53/34 ③ |
|---|---------------------|---|---|---|
| Concrete strength grade ≥ C20/25 $f_{ck,cyl.} = 20 \text{ N/mm}^2$ $f_{ck,cube} = 25 \text{ N/mm}^2$ | 350 mm 3 anchors | 350 mm 3 anchors | 350 mm 3 anchors | 350 mm 3 anchors |
| $F_{Rd} = N_{Rd} \text{ [kN]}$ | 2×7.0 | 2×9.1 | 2×14.0 | 2×24.5 |
| $a_r \text{ [mm]}$ | ≥ 50 | ≥ 60 | ≥ 70 | ≥ 75 |
| $a_e \text{ [mm]}$ | ≥ 40 | ≥ 45 | ≥ 50 | ≥ 50 |
| $V_{yRd} \text{ [kN]}$ | 2×2.4 | 2×3.7 | 2×4.9 | 2×5.6 |
| Material: hot-dip galvanized | Channel | 1.0038 / 1.0044 | | Anchor |
| | | B500B | | |
| Material: stainless steel | Channel | 1.4571 / 1.4404 ④ | | Anchor |
| | | B500B | | |

② Material 1.0038, ③ Material 1.0044, ④ Not available for HALFEN Cast-in channels HZA-R 29/20

Notes: HALFEN Cast-in channels HTA-R / HZA-R are not included in the HTA-CE/HZA approval

Other channel lengths from 150-6070 mm are available

HALFEN CURTAIN WALL SUPPORT SYSTEMS

Edge of Slab Brackets HCW-ED Post and Beam Façades

Application example


HALFEN Edge of slab brackets are connected in pairs, one each side of the mullion, and are available in two types:

- **Type HCW-ED** Brackets are designed to support both **vertical and horizontal** loads.
- **Type HCW-EW** Brackets are designed to support only **horizontal** wind loads.

The brackets guarantee a simple adjustable connection. The HALFEN Bolts (connection: bracket to HALFEN Channel) and the standard hexagonal bolts M12 (connection: bracket to façade mullion) must be grade strength 8.8.

A round auxiliary hole in the long arm of the brackets can be used for temporary attachments. For example; temporary fixing of brackets to support the post with self-tapping screws until the final connection is made.


The brackets are made of high quality aluminium material. Special nylon discs are placed between the "Wind load" Bracket HCW-EW and support post.

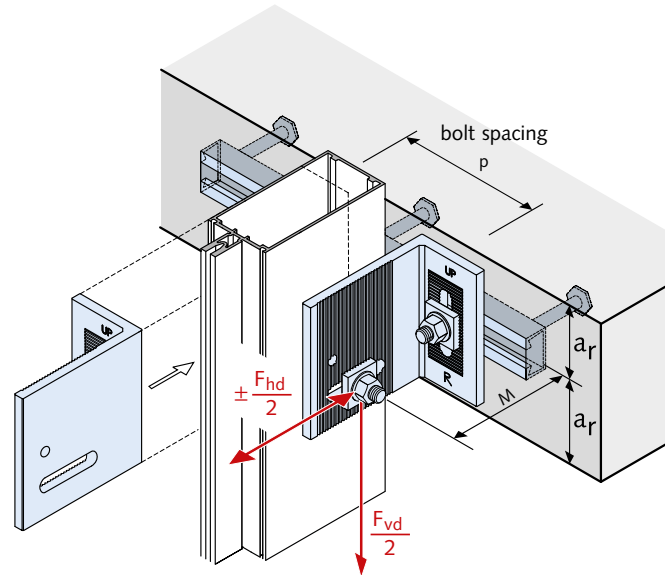

To guarantee correct installation, the HCW-ED brackets are marked 'R' for right, 'L' for left and 'UP' for top.


Bracket dimensions [mm]

HCW-ED Brackets for dead loads and wind loads

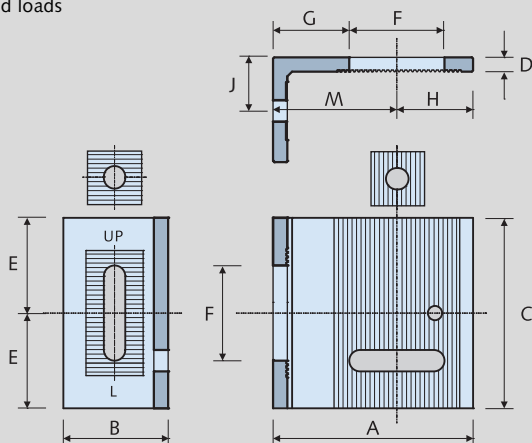

Serrated washers must be ordered separately

HCW-EW Brackets wind loads only

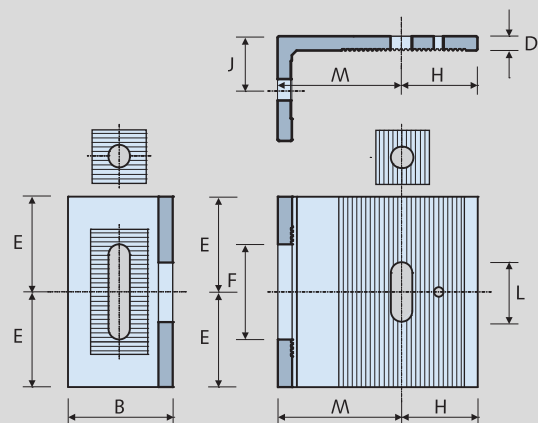


Serrated washers must be ordered separately

| Size | Bracket code | A | B | C | D | E | F | G | H | J | L | M |
|--------|----------------------|-----|----|-----|----|----|----|----|----|----|----|-----|
| Small | HCW-ED 1 HCW-EW 1 | 108 | 70 | 114 | 10 | 57 | 64 | 25 | 51 | 36 | 40 | 57 |
| Medium | HCW-ED 2 | 133 | 70 | 127 | 10 | 64 | 64 | 51 | 51 | 36 | 40 | 82 |
| Large | HCW-ED 3 HCW-EW 3 | 159 | 70 | 140 | 10 | 70 | 64 | 76 | 51 | 36 | 40 | 108 |


HALFEN CURTAIN WALL SUPPORT SYSTEMS

Dimensioning


Interaction diagram for type HCW-ED1 (small)

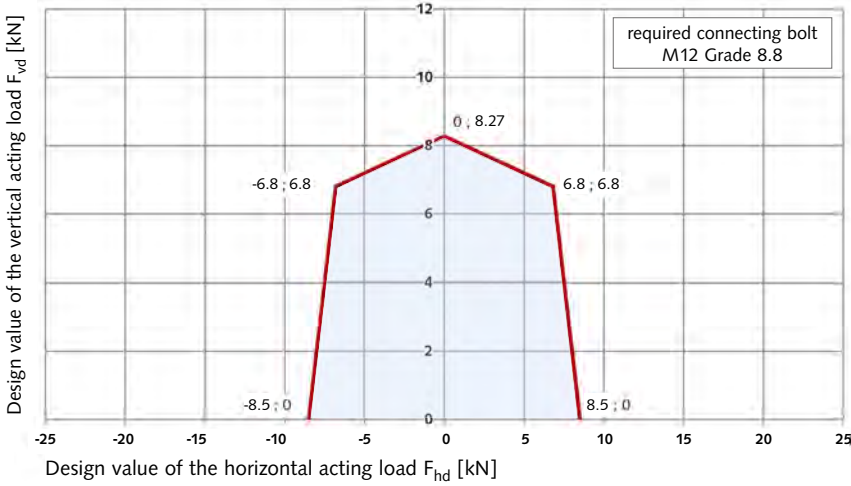


Calculation basis

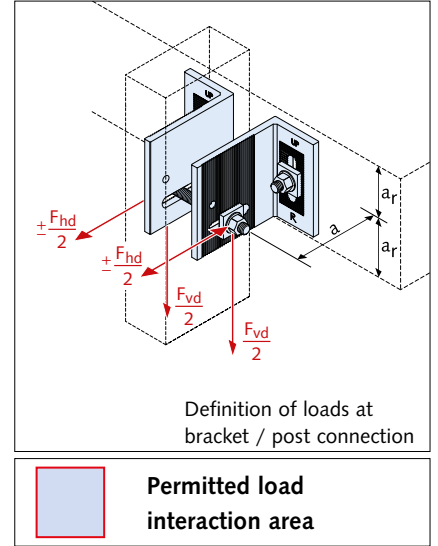

Interaction diagram for type HCW-ED2 (medium)

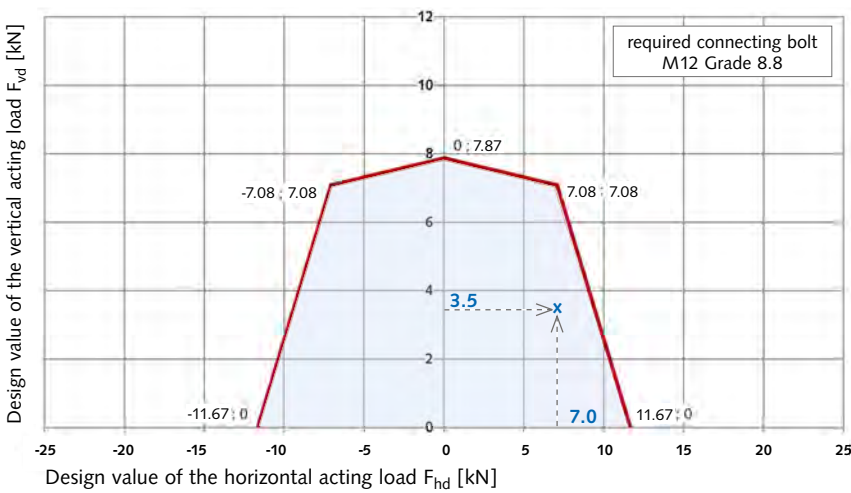

Interaction diagram for type HCW-ED3 (large)

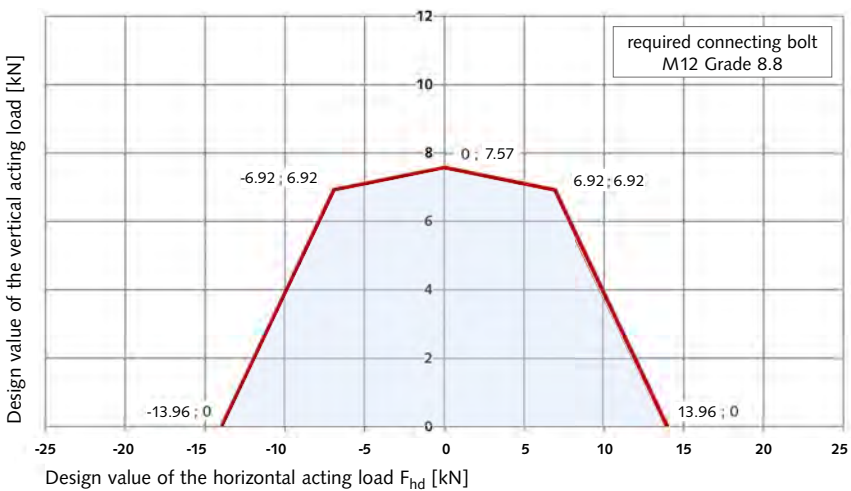

HALFEN CURTAIN WALL SUPPORT SYSTEMS

Design Loads using two HCW-EW Brackets, Loads in the HALFEN Bolts (HCW-ED)

Design wind loads for type HCW-EW

| Max. applied design load F_{hd} [kN] | | | |
|--|--------------|--------------------|--------------------|
| Size | Bracket code | max. F_{vd} [kN] | max. F_{hd} [kN] |
| Small | HCW-EW 1 | 0 | 8.5 |
| Large | HCW-EW 3 | 0 | 13.96 |

HCW-EW Brackets are only suitable for wind loads.

Forces acting on the T-head bolts at the channel (HCW-ED)

The components of the design-reaction forces in the HALFEN Bolts at the connection of the curtain wall bracket to HALFEN Cast-in channel, are calculated by multiplying the design loads F_{vd} and F_{hd} at connection curtain wall bracket and façade support post with the factors s_x , s_y and s_z . The factors are dependent on the bracket geometry, the load direction and the bolt position (see figure on the right). See table below for multiplication factors for determining the design reaction forces in the HALFEN Bolts.

Lower installation position of HALFEN Bolt (Position 3)

| Bracket | Dead load $S_i = (F_{vd} / 2) \times s_i$ | | | Wind load $S_i = (F_{hd} / 2) \times s_i$ | | | Resulting load 45° $S_i = (\text{res. } F_d / 2) \times s_i$ | | |
|----------|--|-------|-------|--|-------|-------|---|-------|-------|
| | s_x | s_y | s_z | s_x | s_y | s_z | s_x | s_y | s_z |
| HCW-ED 1 | 0.5 | 3.2 | -1.0 | -1.0 | 1.0 | 0.0 | -0.3 | 3.0 | -0.7 |
| HCW-ED 2 | 0.5 | 3.6 | -1.0 | -0.5 | 1.0 | 0.0 | 0.0 | 3.3 | -0.7 |
| HCW-ED 3 | 0.5 | 4.0 | -1.0 | -0.4 | 1.0 | 0.0 | 0.1 | 3.5 | -0.7 |

Upper installation position of HALFEN Bolt (Position 1)

| | | | | | | | | | |
|----------|-----|-----|------|------|-----|-----|------|-----|------|
| HCW-ED 1 | 0.6 | 1.3 | -1.0 | -1.0 | 3.6 | 0.0 | -0.3 | 3.4 | -0.7 |
| HCW-ED 2 | 0.6 | 1.6 | -1.0 | -0.5 | 3.1 | 0.0 | 0.0 | 3.4 | -0.7 |
| HCW-ED 3 | 0.6 | 1.9 | -1.0 | -0.4 | 2.9 | 0.0 | 0.1 | 3.4 | -0.7 |

Calculation example

Assumed: slab thickness = 200 mm, width of mullion = 80 mm,
projection a = 80 mm (install. position see page 84)
design dead load $F_{vd} = +3.5$ kN
design wind load (wind suction) $F_{hd} = +7.0$ kN

Selected: HALFEN Bracket type HCW-ED 2
⇒ possible projection $M = 82 \pm 25$ mm
⇒ Interaction diagram type HCW-ED 2
(see page 84) proves that the assumed load is within the permitted load interaction zone

Determination of the design reaction forces in a HALFEN Bolt


① Lower installation position (Position 3)

$$\begin{aligned} S_x &= (3.5/2) \times 0.5 + (7/2) \times (-0.5) = -0.88 \text{ kN} \\ S_y &= (3.5/2) \times 3.6 + (7/2) \times 1.0 = +9.80 \text{ kN} \\ S_z &= (3.5/2) \times (-1.0) + 0 = -1.75 \text{ kN} \end{aligned}$$


⇒ Resulting bolt load

$$\text{res. } S_d = \sqrt{(-0.88)^2 + (9.80)^2 + (-1.75)^2} = 9.99 \text{ kN} \quad \text{per bolt}$$


Calculation basis

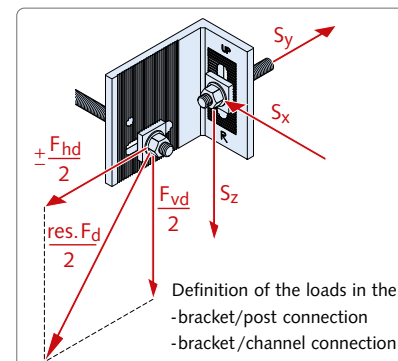

① Lower installation position of HALFEN Bolts (Position 3)



② Upper installation position of HALFEN Bolts (Position 1)



② Upper installation position (Position 1)

$$\begin{aligned} S_x &= (3.5/2) \times 0.6 + (7/2) \times (-0.5) = -0.70 \text{ kN} \\ S_y &= (3.5/2) \times 1.6 + (7/2) \times 3.1 = +13.65 \text{ kN} \\ S_z &= (3.5/2) \times (-1.0) + 0 = -1.75 \text{ kN} \end{aligned}$$

⇒ Resulting bolt load

$$\text{res. } S_d = \sqrt{(-0.70)^2 + (13.65)^2 + (-1.75)^2} = 13.78 \text{ kN} \rightarrow \text{each bolt}$$

→ determining factor for bolt selection

Selected HALFEN Channel:

HTA-R 50/30 - 350 - 3 Anchor - FV see page 82

with $V_{yRd} = 2 \times 5.6 \text{ kN} > 2 \times |S_z| = 2 \times 1.75$

($a_r \geq 75$ mm)

$$F_{Rd} = 2 \times 14.0 \text{ kN} > 2 \times \text{res. } S_d = 2 \times 13.78 \text{ kN}$$

Check: bolt spacing: $P = 80 + 2 \times 36 = 152$ mm

Selected HALFEN Channel: > 150 mm ✓


HS 50/30 - M12 × 60 FV 8.8

Requirement according to interaction diagram see page 84

HALFEN CURTAIN WALL SUPPORT SYSTEMS

Top of Slab Brackets HCW-B1

Support brackets for horizontal and vertical loads

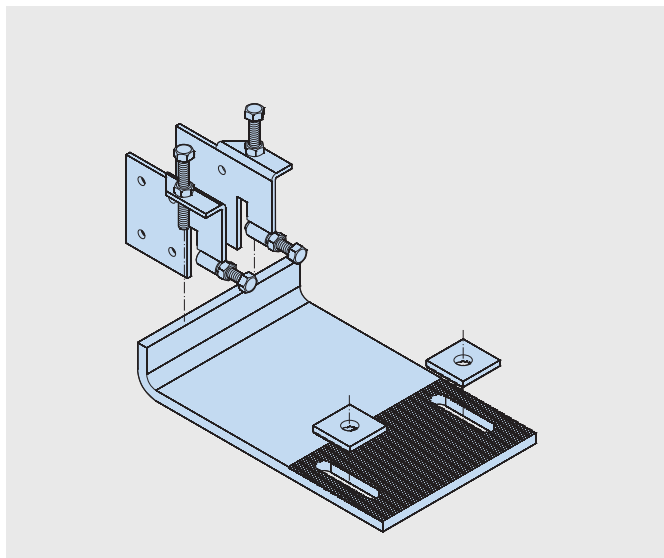


HALFEN Brackets HCW-B1


HALFEN Brackets HCW-B1 for installing to the top of concrete slabs, are available in two load ranges and three cantilever sizes.

The brackets are made in grade S355 quality galvanized steel. Vertical adjustability is ± 10 mm.

Three-dimensional adjustability is ensured when used in combination with HALFEN HTA-CE Cast-in channels.

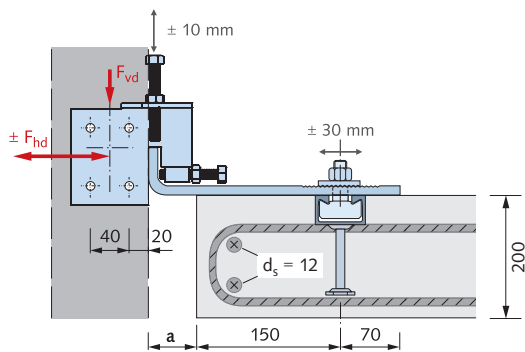


Section

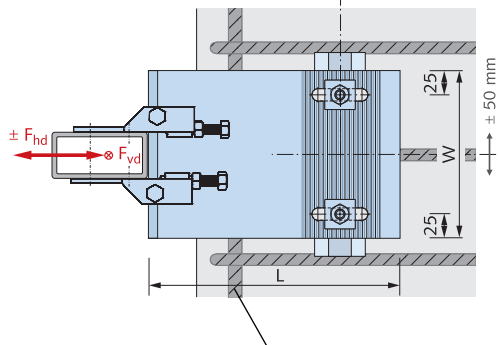

Plan

Required edge reinforcement $\geq \text{Ø}12$ (B500B)

Typical installation

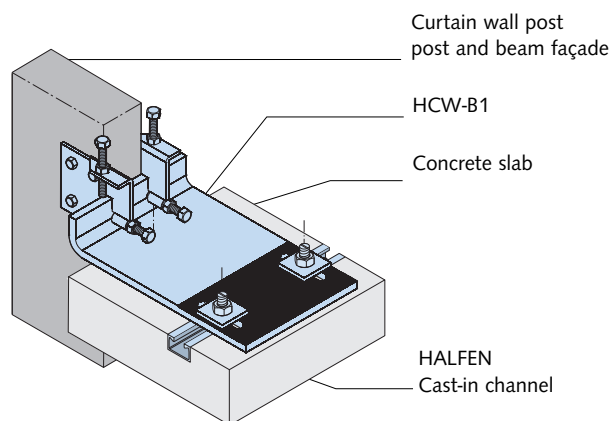

The lateral connecting plates are connected to the façade posts using M8 screws (not included). The façade planner is responsible for providing the static verification for the support posts. Use M16 HALFEN Bolts, grade 8.8 (order separately), to connect the base bracket to the HALFEN Cast-in channel. Depending on the façade type, the connection between the connecting plate and the base bracket can be designed either laterally adjustable or as a fixed point.

Dimensioning / Type selection

Design load ranges

| Load range [kN] | dead load F_{vd} [kN] | wind load F_{hd} [kN] (wind suction + compression) |
|-----------------|-------------------------|---|
| 4/12 | 4 | ± 12 |
| 7/20 | 7 | ± 20 |

F_{vd} , F_{hd} : allowable design loads with a partial safety factor $\gamma_F = 1.35$ for dead load and $\gamma_F = 1.5$ for wind load.

Type selection



| Load range [kN] | a [mm] | Item name HCW-B1-... | L [mm] | W [mm] | HALFEN Channel ① | Recommended HALFEN Bolt |
|-----------------|--------|-------------------------|--------|--------|---------------------|----------------------------|
| 4/12 | 50 | ...-4/12-50 | 270 | 150 | HTA-CE | HS 40/22 |
| | 75 | ...-4/12-75 | 295 | 150 | 40/22P-250 | M16×60 |
| | 100 | ...-4/12-100 | 320 | 150 | 2 Anchors | 8.8 |
| 7/20 | 50 | ...-7/20-50 | 270 | 175 | HTA-CE | HS 50/30 |
| | 75 | ...-7/20-75 | 295 | 175 | 50/30P-300 | M16×60 |
| | 100 | ...-7/20-100 | 320 | 200 | 3 Anchors | 8.8 |

① Recommended HALFEN Channel exploiting full load capacity of bracket

HALFEN CURTAIN WALL SUPPORT SYSTEMS

Top of Slab Brackets HCW-B2


Brackets for horizontal and vertical loads

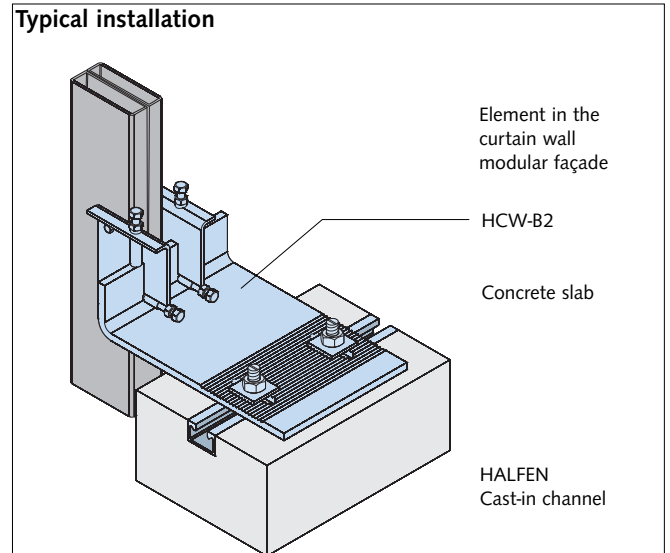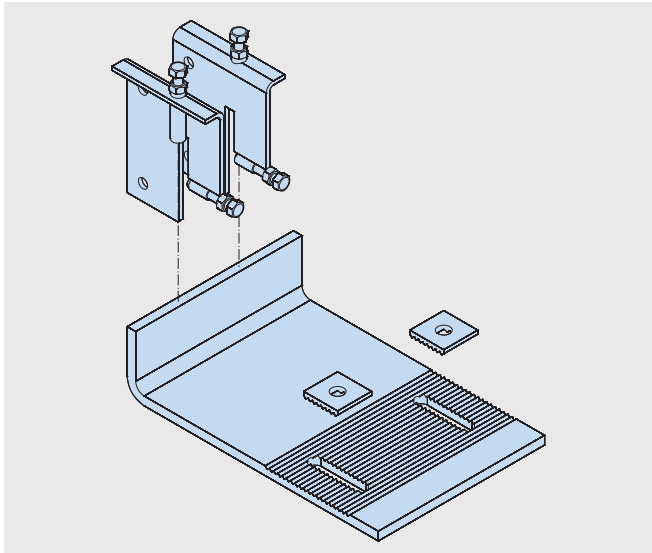

HALFEN Brackets HCW-B2


HALFEN Brackets HCW-B2 are made in grade S355 quality galvanized steel. The vertical adjustability is ± 24 mm. Three-dimensional adjustability is ensured when used in combination with HALFEN Cast-in channels HTA-CE. The lateral connecting plates are connected to the façade posts using M12 screws (not included in delivery).

The façade planner is responsible for providing the static verification for the support posts. Use M16 HALFEN Bolts, grade 8.8 (order separately), to connect the base bracket to the HALFEN Cast-in channel. Depending on the façade type, the connection between the connecting plate and the base bracket can be designed either laterally adjustable or as a fixed point.

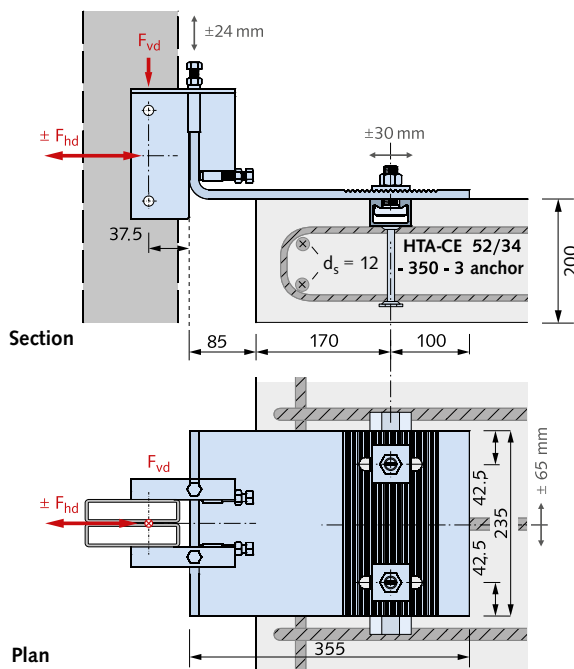

Required edge reinforcement $\geq \phi 12$ (B500B)

Dimensioning

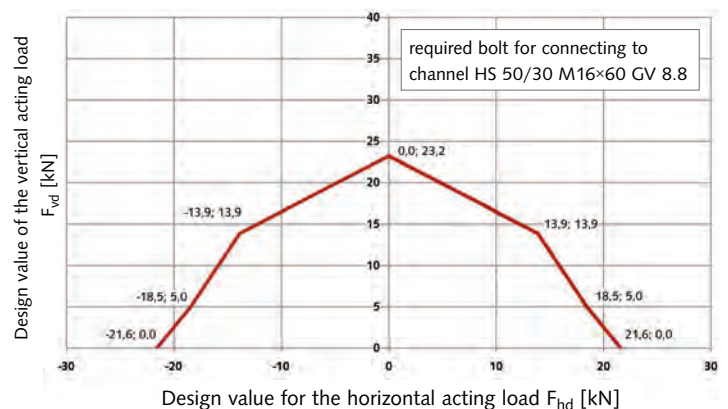

Allowable load interaction area

ACCESSORIES

The benefits at a glance

You can design nearly all connections in buildings and industrial plants with HALFEN Channels. With Cast-in channels or framing channels, HALFEN Bolts and with our wide range of accessories we provide fastenings for all purposes.



KLP Rail clips

Application example with HALFEN KLP Rail clips

Fast and cost-effective

- > 3-dimensional adjustable connection when used with cast-in channels
- > uses bolts instead of welding
- > simple assembly reduces installation time



VBM Coupler sleeve

Connect nearly everything with a VBM Coupler sleeve

Further accessories for construction and industrial design

The HALFEN Framing system (industrial) product range can be found in the following catalogues:

HALFEN Flexible bolt connections, HALFEN Flexible framing connections or HALFEN Powerclick System.



e.g. channel rings, cantilever arms, pipe clamps

e.g. threaded locking plates

ACCESSORIES

Nuts and washers

MU

Hexagonal nuts
EN ISO 4032/
DIN 934




| GV galvanized FK 8 thread | A4 stainless steel Bolt | S/m DIN [mm] | S/m ISO [mm] |
|---------------------------------------|-------------------------------|--------------------|--------------------|
| M6 | M6 | 10/5 | 10/5.2 |
| M8 | M8 | 13/6.5 | 13/6.8 |
| M10 | M10 | 17/8 | 16/ 8.4 |
| M12 | M12 | 19/10 | 18/10.8 |
| M16 | M16 | 24/13 | 24/14.8 |
| M20 | M20 | 30/16 | 30/18 |
| M24 | - | 36/19 | 36/21.5 |
| FV hot-dip galvanized thread | A2 stainless steel Bolt | S/m DIN [mm] | S/m ISO [mm] |
| M6 | - | 10/5 | 10/5.2 |
| M8 | M8 | 13/6.5 | 13/6.8 |
| M10 | M10 | 17/8 | 16/8.4 |
| M12 | M12 | 19/10 | 18/10.8 |
| M16 | M16 | 24/13 | 24/14.8 |


VUS

Square washers


VUS 40/25
for profile
40/25;
HZA
41/22




VUS 49/30
for profile
54/33,
49/30



VUS 52/34
for profile
52/34,
50/30



VUS 72/49
for profile
72/48,
72/49



VUS 41/41
for all
41/..
profiles




| FV Hot-dip galvanized Bolt size | A4 Stainless steel Bolt size | a × b × d [mm] |
|--|------------------------------------|-------------------|
| M10 | M10 | 40 × 40 × 5 |
| M12 | M12 | 40 × 40 × 5 |
| M16 | M16 | 40 × 40 × 5 |
| M10 | M10 | 37 × 37 × 5 |
| M12 | M12 | 37 × 37 × 5 |
| M16 | M16 | 37 × 37 × 5 |
| M20 | M20 | 37 × 37 × 5 |
| M16 | M16 | 50 × 50 × 6 |
| M20 | M20 | 50 × 50 × 6 |
| M20 | M20 | 54 × 54 × 6 |
| M24 | M24 | 54 × 54 × 6 |
| M27 | M27 | 54 × 54 × 6 |
| M30 | M30 | 54 × 54 × 6 |
| M6 | M6 | 40 × 40 × 6 |
| M10 | M10 | 40 × 40 × 6 |
| M12 | M12 | 40 × 40 × 6 |

| GV galvanized | A4 Stainless steel A4 | Suitable for HALFEN bolts Type | Dimensions |
|------------------|--------------------------|--------------------------------------|------------|
| SIC - 50/30 - GV | SIC - 50/30 - A4 | 50/30 | M16, M20 |
| SIC - 40/22 - GV | SIC - 40/22 - A4 | 38/17 40/22 | M16 |
| SIC - 38/23 - GV | - | 38/23 | M16 |
| SIC - 29/20 - GV | - | 29/20 | M12 |
| SIC - 38/17 - GV | SIC - 38/17 - A4 | 38/17 40/22 | M12, M10 |
| SIC - 28/15 - GV | SIC - 28/15 - A4 | 28/15 | M8, M10 |
| SIC - 20/12 - GV | SIC - 20/12 - A4 | 20/12 | M8 |

Ordering example: VUS 52/34 - FV - M20


Application VUS:

for shimming non-flush
installation of HALFEN
Anchor channels or for
stand-off installations
→ see page 37.



US

Washers
DIN EN
ISO 7093/
DIN 9021;
DIN EN ISO
7094




| DIN/ ISO | GV galvanized, bolt | A4 stainless steel bolt | D [mm] | d [mm] | s [mm] |
|-----------------------------|---------------------------|-------------------------------|-----------|-----------|-----------|
| 7094 | M6 | - | 22 | 6.6 | 2 |
| 9021 | M8 | M8 | 24 | 8.4 | 2 |
| 9021 | M10 | M10 | 30 | 10.5 | 2.5 |
| 7094 | M12 | - | 45 | 13.5 | 4 |
| 9021 | M12 | M12 | 37 | 13 | 3 |
| 9021 | M16 | M16 | 50 | 17 | 3 |
| 7094 | M20 | - | 72 | 22 | 6 |
| FV hot-dip galv. bolt | | | D [mm] | d [mm] | s [mm] |
| 9021 | M10 | - | 30 | 10.5 | 2.5 |
| 9021 | M12 | - | 37 | 13 | 3 |
| 9021 | M16 | - | 50 | 17 | 3 |

Ordering example: US - M12 - GV - DIN 9021

US

Washers
DIN EN
ISO 7089/
DIN 125




| GV galvanized bolt | A4 Stainless steel bolt | D [mm] | d [mm] | s [mm] |
|-----------------------------|-------------------------------|-----------|-----------|-----------|
| M6 | M6 | 12 | 6.4 | 1.6 |
| M8 | M8 | 16 | 8.4 | 1.6 |
| M10 | M10 | 21 | 10.5 | 2 |
| M12 | M12 | 24 | 13 | 2.5 |
| M16 | M16 | 30 | 17 | 3 |
| M20 | M20 | 37 | 21 | 3 |
| M24 | - | 44 | 25 | 4 |
| FV Hot-dip galvanized | A2 Stainless steel bolt | D [mm] | d [mm] | s [mm] |
| - | M8 | 17 | 8.4 | 1.6 |
| M10 | M10 | 21 | 10.5 | 2 |
| M12 | M12 | 24 | 13 | 2.5 |
| M16 | M16 | 30 | 17 | 3 |
| M20 | - | 37 | 21 | 3 |
| M27 | - | 50 | 28 | 4 |

Ordering example: US - M12 - GV - DIN 125

SIC


Locking
washer



| GV galvanized | A4 Stainless steel A4 | Suitable for HALFEN bolts Type | Dimensions |
|------------------|--------------------------|--------------------------------------|------------|
| SIC - 50/30 - GV | SIC - 50/30 - A4 | 50/30 | M16, M20 |
| SIC - 40/22 - GV | SIC - 40/22 - A4 | 38/17 40/22 | M16 |
| SIC - 38/23 - GV | - | 38/23 | M16 |
| SIC - 29/20 - GV | - | 29/20 | M12 |
| SIC - 38/17 - GV | SIC - 38/17 - A4 | 38/17 40/22 | M12, M10 |
| SIC - 28/15 - GV | SIC - 28/15 - A4 | 28/15 | M8, M10 |
| SIC - 20/12 - GV | SIC - 20/12 - A4 | 20/12 | M8 |

Ordering example: SIC - 38/17 - GV

Assembly:

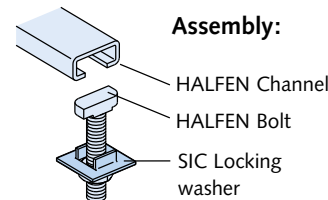

Application SIC:

to secure and prevent
HALFEN Bolts
back-turning
during assembly.

ACCESSORIES

Threaded rods, Hexagonal head bolts, Coupler sleeves, Ring nuts

GWS

Threaded rods
DIN 976-1




| GV | A4 | Length | F _{Rd} | allow. F |
|----------------------------------|---------------------------------|--------|-----------------|----------|
| Galvanized F.k. 4.6 Thread | Stainless steel A4 Thread | [mm] | ① [kN] | [kN] |
| M6 | M6 | 1000 | 3.1 | 2.2 |
| M8 | M8 | 1000 | 5.6 | 4.0 |
| M10 | M10 | 1000 | 9.0 | 6.4 |
| M12 | M12 | 1000 | 13.0 | 9.3 |
| M16 | M16 | 1000 | 24.2 | 17.3 |
| M20 | M20 | 1000 | 37.8 | 27.0 |
| M24 | - | 1000 | 54.3 | 38.8 |

Ordering example: **GWS - M12 × 1000 - GV**

VBM

Coupler sleeves,
round




| GV | A4 | D | L | F _{Rd} | allow. F |
|----------------------|---------------------------|-------|------|-----------------|----------|
| Galvanized Thread | Stainless steel Thread | [mm] | [mm] | ① [kN] | [kN] |
| M6 | M6 | 10/10 | 15 | 3.1 | 2.2 |
| M8 | M8 | 12/14 | 20 | 5.6 | 4.0 |
| M10 | M10 | 13/16 | 25 | 9.0 | 6.4 |
| M12 | M12 | 16/20 | 30 | 13.0 | 9.3 |
| M16 | M16 | 21/25 | 40 | 24.2 | 17.3 |
| M20 | M20 | 26/32 | 50 | 37.8 | 27.0 |

Ordering example: **VBM - A4 - M16**

HSK

Hexagonal head
bolts
EN ISO 4017/
DIN 933
(without nut)

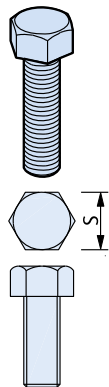


Hex bolts are used
in combination with
HALFEN Locking
plates

| GV 8.8 | A4 | S | S |
|------------------------------------|-------------------------------|-------------|----------------|
| Galvanized FK 8.8 Dimensions | Stainless steel Dimensions | DIN [mm] | EN ISO [mm] |
| M 6 × 12 | - | 10 | 10 |
| M 6 × 25 | - | 13 | 13 |
| M 8 × 25 | M 8 × 25 | 13 | 13 |
| M 8 × 40 | - | 17 | 16 |
| M 10 × 20 | - | 17 | 16 |
| M 10 × 30 | M 10 × 30 | 17 | 16 |
| M 10 × 45 | M 10 × 45 | 17 | 16 |
| M 10 × 60 | - | 19 | 18 |
| M 10 × 70 | - | 19 | 18 |
| M 12 × 22 | - | 19 | 18 |
| M 12 × 25 | M 12 × 25 | 19 | 18 |
| M 12 × 30 | M 12 × 30 | 19 | 18 |
| M 12 × 40 | M 12 × 40 | 19 | 18 |
| M 12 × 50 | - | 24 | 24 |
| M 12 × 60 | M 12 × 60 | 24 | 24 |
| M 12 × 80 | M 12 × 80 | 24 | 24 |
| M 12 × 90 | - | 24 | 24 |
| M 16 × 40 | M 16 × 40 | 24 | 24 |
| M 16 × 60 | M 16 × 60 | 24 | 24 |
| M 16 × 90 | M 16 × 90 | 24 | 24 |

SKM

Hexagonal coupler sleeves with
view holes




| FV | A4 | S | L | F _{Rd} | allow. F |
|---------------------------------|---------------------------|------|------|-----------------|----------|
| Hot-dip galvanized Thread | Stainless steel Thread | [mm] | [mm] | ① [kN] | [kN] |
| M10 | M10 | 13 | 40 | 9.0 | 6.4 |
| M12 | M12 | 17 | 40 | 13.0 | 9.3 |
| M16 | M16 | 22 | 50 | 24.2 | 17.3 |

Ordering example: **SKM - FV - M12**

SPH

Turnbuckles
with right-
and left-hand
thread





f = min. screw
depth
M12 ≅ 10mm
M16 ≅ 13 mm

| A4 | A4 | D | D |
|--|--|--------------------|--------------------|
| Stainless steel Thread M12 × Length L [mm] | Stainless steel Thread M16 × Length L [mm] | For M12 [mm] | For M16 [mm] |
| M 12 × 60 | M 16 × 60 | 16 | 22 |
| M 12 × 75 | M 16 × 75 | 16 | 22 |
| M 12 × 95 | M 16 × 95 | 16 | 22 |
| M 12 × 115 | M 16 × 115 | 16 | 22 |
| M 12 × 135 | M 16 × 135 | 16 | 22 |
| allow. F = 5 kN F _{Rd} = 7 kN | allow. F = 10 kN F _{Rd} = 14 kN | | |

Ordering example: **SPH - A4 - M12 x 75**

HJV


Adjustment
coupler

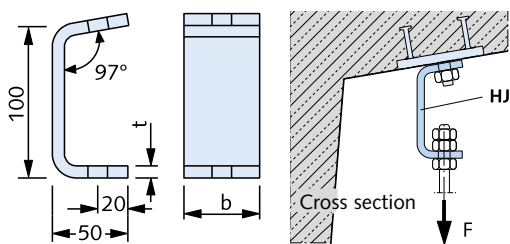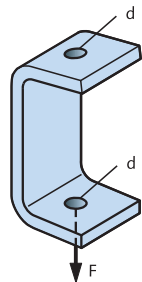

| FV | A4 | t | b | d | max. F _{Ed} | allow. F |
|-------------------------------|----------------------------|------|------|------|-------------------------|-------------|
| Hot-dip galvanized Type | Stainless steel Type | [mm] | [mm] | [mm] | [kN] | [kN] |
| 1 | 1 | 6 | 40 | 13 | 2.1 | 1.5 |
| 2 | 2 | 8 | 50 | 17 | 4.6 | 3.3 |
| 3 | 3 | 10 | 50 | 17 | 7.0 | 5 |

RM

Ring nut
DIN 582
from 2010-09



| GV | d | F _{Rd} | allow. F |
|-----------------------------|------|-----------------|----------|
| C 15E, galvanized Thread | [mm] | ① [kN] | [kN] |
| M8 | 20 | 2.0 | 1.4 |
| M10 | 25 | 3.2 | 2.3 |
| M12 | 30 | 4.8 | 3.4 |
| M16 | 35 | 9.8 | 7.0 |
| M20 | 40 | 16.8 | 12.0 |

Ordering example: **RM - GV - M12**

- ① Recommended design value of the load capacity with a centric tensile stress
② Recommended design value of the load

ACCESSORIES



Rail Clips

KLP-S Rail clips, steel 1.0038 forged


| FV hot-dip galvanized Type | Heel width n [mm] | for HALFEN Bolts Ø × l [mm] | Dimensions [mm] | | | | | | | Allowable load at σ allowable = 125 N/mm ² F [kN] | Standard profile I | Preferred for use with | |
|-------------------------------|-------------------|--------------------------------|-----------------|----|----|------|---|------|------|--|--------------------|---|---------------|
| | | | a | b | c | Ø d | h | k | m | | | other beam, flange thickness channels t [mm] | channels |
| No. 10 | 16 | M16 × 60 | 44.0 | 45 | 12 | 18 | 5 | 12.0 | 22.0 | 3.5 | 80–140 | 4–6 | S24 |
| No. 26 | without heel | M16 × 60 | 62.5 | 64 | 21 | 18 | 9 | 16.5 | 34.5 | 3.5 | 160–240 | 7–9 | S24, A45, A55 |
| No. 20 | 20 | M20 × 65 | 52.0 | 55 | 19 | □ 21 | 8 | 15.0 | 24.0 | 10.0 | 160–240 | 7–9 | S24–S49 |

Ordering example: KLP - S - Nr. 26 - FV

□ = square opening

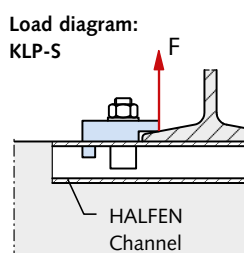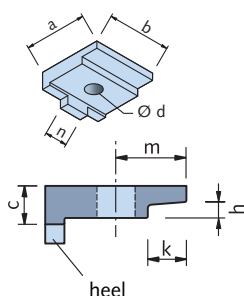

Assembly example
KLP-S

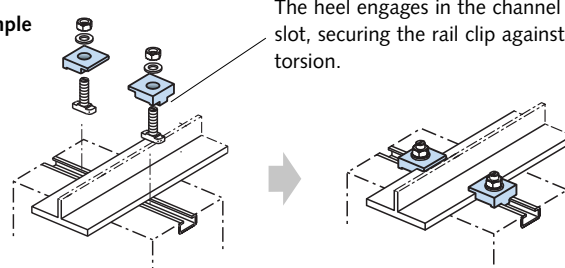

The heel engages in the channel slot, securing the rail clip against torsion.


KLP - 60 Rail clips

| FV Hot-dip galvanized | Clamping height h [mm] | Allowable load [®] [kN] | Preferred for use with | | |
|-----------------------|------------------------|--|------------------------|----------------------|---------------------------------------|
| | | | Standard profile I | Standard profile IPB | Crane and running tracks [®] |
| 60/10 | 10 | F ₁ = 7.0 HALFEN Bolt M16 × 60, Grade 4.6 | 120–160 | 100 | A65, S33, S41 |
| 60/12 | 12 | | 220–240 | 140 | A100, S49, A75 |
| 60/14 | 14 | | 240–280 | 160–180 | A120, S54 |
| 60/16 | 16 | F ₂ = 11.25 HALFEN Bolt M16 × 60, Grade 8.8 | 300–340 | 200–220 | S64 |
| 60/18 | 18 [®] | | 360–380 | 240–260 | - |
| 60/20 | 20 [®] | | 400–450 | 280–300 | - |


® Take the load capacity of HALFEN Channels into account (Cantilever must be considered when selecting the HALFEN Channels and bolts)

® Bolt M16 × 80 necessary ④ Check flange thickness of profile!

Order example: KLP - 60/10 - FV

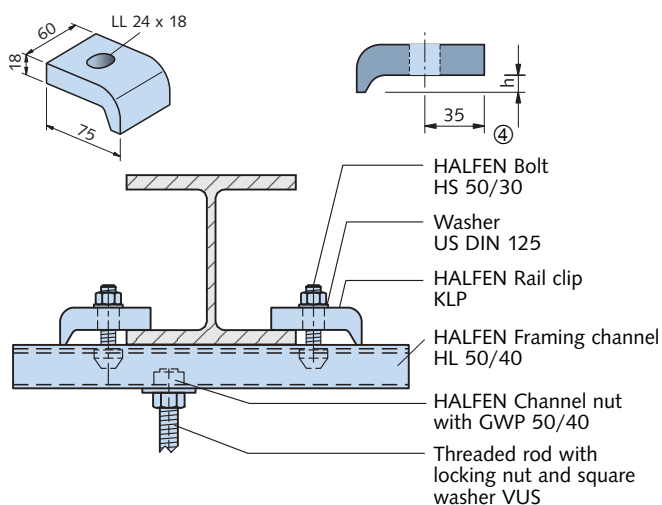


Load diagram
KLP - 60

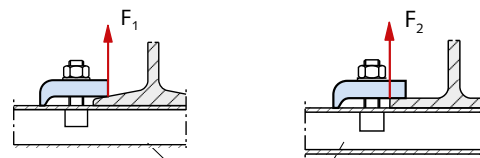


Assembly example
KLP - 60

e.g. HL 50/40

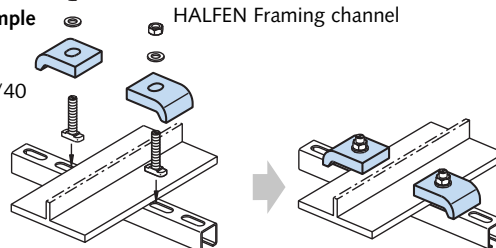

Index

| | | | |
|---|-------|--|-------|
| Accessories | 88–91 | HZL Framing channels, slotted | 59–61 |
| Adjustment coupler HJV | 90 | HZM Framing channels, serrated | 59–61 |
| BL, BLQ brick tie anchor | 66–68 | HZS Halfen Bolts, serrated | 31–32 |
| Brick tie anchor ML, BL | 66–68 | Locking washer SIC | 89 |
| Brick tie channel HMS | 66 | ML, MLQ Brick tie anchor | 62–64 |
| Cold-rolled channels HTA-CE | 19 | Nuts MU | 89 |
| Cold-rolled channels HZA | 29 | Precast connection HVL | 73 |
| Corner guard HKW | 74 | Profiled metal sheet fixing channel HTU | 52–58 |
| Corrosion protection Halfen Channels and bolts | 9–10 | Profiles HM, HL | 59–61 |
| Coupler sleeves VBM, SKM | 90 | Profiles, serrated, HZM, HZL | 59–61 |
| Curved HALFEN Cast-in channels HTA-CS | 26 | Rafter shoe HSF | 64 |
| Curved HALFEN Cast-in channels HZA | 30 | Rail clips KLP | 91 |
| Dowels | 69 | Restraint tie HKZ | 71–72 |
| DYNAGRIP® HALFEN Cast-in channels | 27–33 | Restraint tie, serrated HKZ | 71–72 |
| Dynamic Loads for HTA-CE Cast-in channels | 25 | Restraint with turnbuckle SPV | 70 |
| End anchor ANK-E for Halfen HTA Channels | 34 | Ring nuts RM | 90 |
| Firewall connection (masonry) | 68 | Serrated channels HZA (Anchoring systems) | 27–33 |
| Framing channels HM, HZM, HL, HZL | 59–61 | Serrated channels HZM, HZL (Industrial) | 59–61 |
| Halfen Bolts HS | 22–23 | Serrated profiles HZA | 27–33 |
| Halfen Bolts HSR | 24 | Serrated profiles, bolts | 27–33 |
| Halfen Bolts HZS | 32 | Short lengths of Halfen HTA-CE Channels | 26 |
| HALFEN Cast-in channels; corner elements | 34 | Short lengths of Halfen HZA Channels | 30 |
| Handrail connection systems HGB | 38–51 | SIC Locking washer | 89 |
| HCW Curtain Wall System | 75–87 | SKM Coupler sleeve | 90 |
| Hexagonal coupler SKM | 90 | Slotted framing channels HL, HZL | 59–61 |
| Hexagonal nuts - bolts | 89–90 | SPH turnbuckle with right and left-hand threads | 90 |
| HGB Handrail connection systems | 38–51 | SPV Restraint with turnbuckle | 70 |
| HKW Corner guard | 74 | Square washers VUS | 89 |
| HKZ Restraint tie, serrated | 71–72 | Standard lengths for Halfen Channels HTA-CE | 26 |
| HL Framing channels, slotted | 59–61 | Standard lengths for Halfen Channels HZA | 30 |
| HM Framing channels | 59–61 | Threaded rods | 90 |
| HMS Brick tie channels | 66 | Tightening torques HALFEN HS Bolts | 23 |
| HNA Timber fixing straps | 65 | Tightening torques HALFEN HZS Bolts serrated | 32 |
| Hot-rolled channels HTA-CE | 18 | Timber fixing | 60–61 |
| Hot-rolled channels HZA | 29 | Turnbuckle with right and left-hand thread SPH | 90 |
| HS Halfen Bolts | 22–23 | US Washer | 89 |
| HSF Rafter shoe | 64 | VBM Coupler sleeve | 90 |
| HSR Halfen Bolts with nib | 24 | VUS Washer | 89 |
| HTA-CE HALFEN Cast-in Channels | 16–26 | Washer US, VUS | 89 |
| HTU Profiled metal sheets fixing channels | 52–58 | | |
| HVL Precast connection | 73 | | |
| HZA Halfen Cast-in channel DYNAGRIP | 27–33 | | |
| HZA Halfen Cast-in channel, serrated | 27–33 | | |

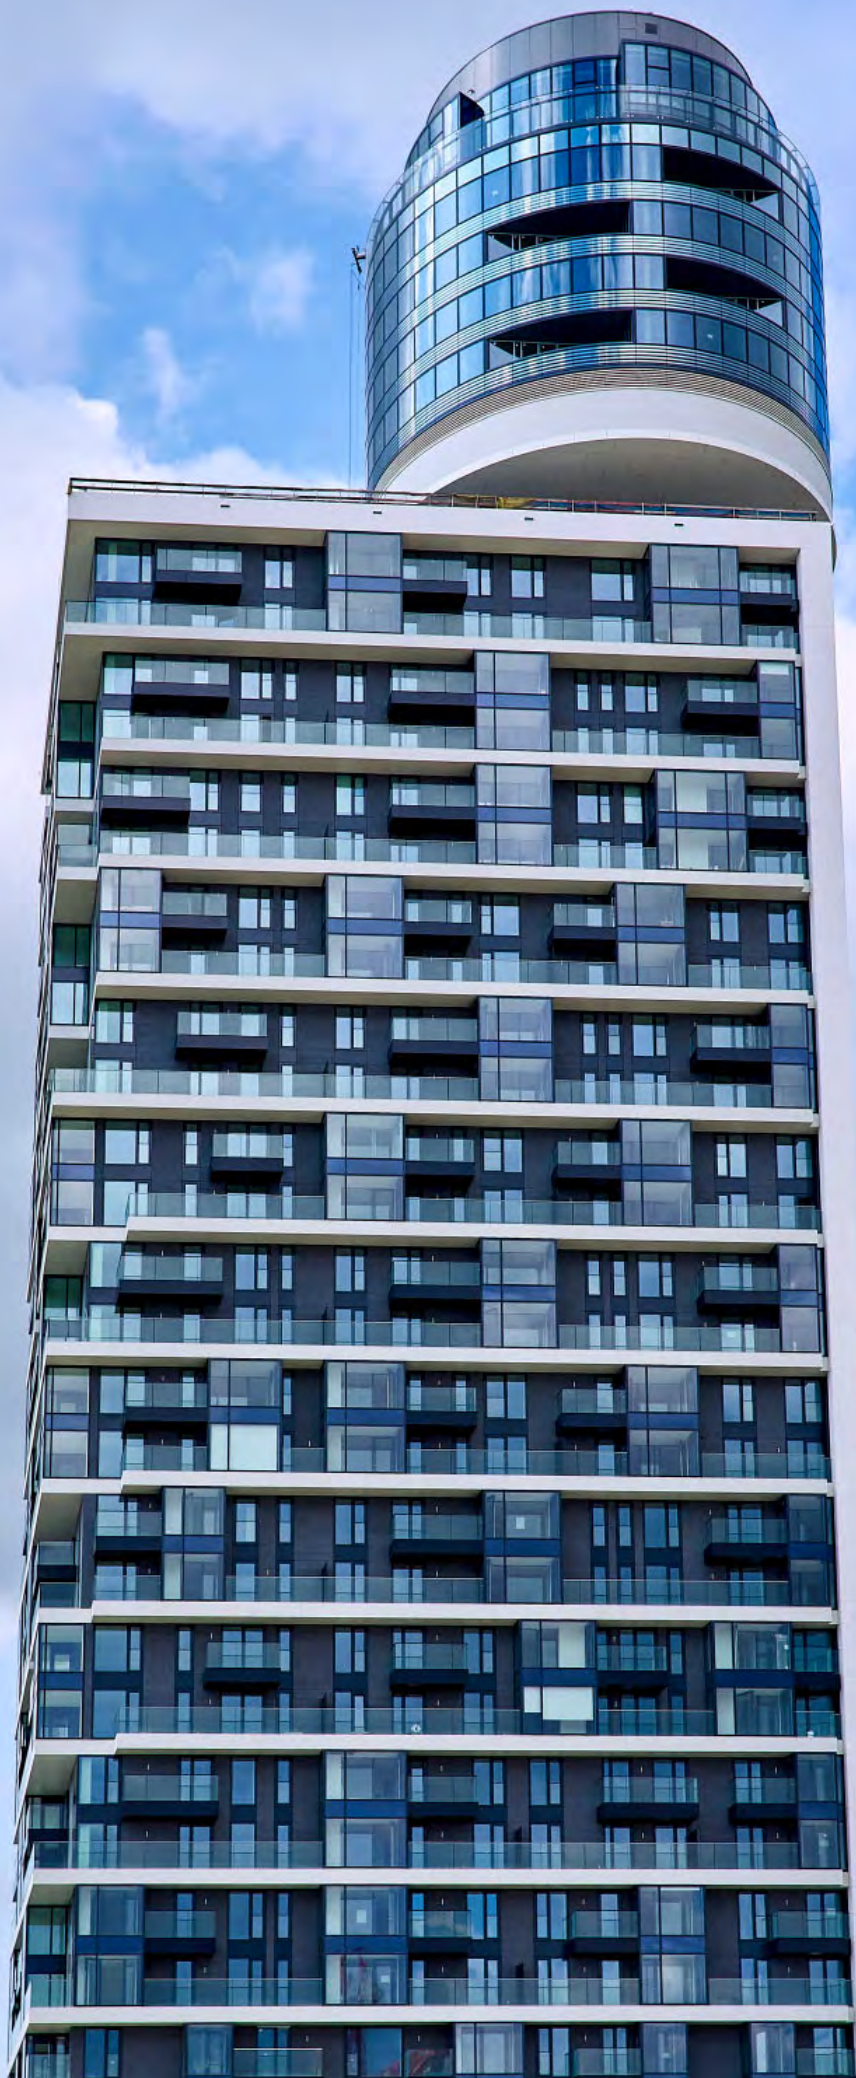



Leviat[®]
A CRH COMPANY

Innovative engineered products and construction solutions that allow the industry to build safer, stronger and faster.



Worldwide contacts for Leviat:

Australia

Leviat
98 Kurrajong Avenue,
Mount Druitt, Sydney, NSW 2770
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leviat
Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Leviat
Borkelstraat 131
2900 Schoten
Tel: +32 - 3 - 658 07 20
Email: info.be@leviat.com

China

Leviat
Room 601 Tower D, Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing · P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Leviat
Business Center Šafránková
Šafránková 1238/1
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Leviat
Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

Leviat
18, rue Goubet
75019 Paris
Tel: +33 - 1 - 44 52 31 00
Email: info.fr@leviat.com

Germany

Leviat
Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Leviat
309, 3rd Floor, Orion Business Park
Ghodbunder Road, Kapurbawdi,
Thane West, Thane,
Maharashtra 400607
Tel: +91 - 22 2589 2032
Email: info.in@leviat.com

Italy

Leviat
Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

Leviat
28 Jalan Anggerik Mokara 31/59
Kota Kemuning, 40460 Shah Alam
Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Leviat
Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

Leviat
2/19 Nuttall Drive, Hillsborough,
Christchurch 8022
Tel: +64 - 3 376 5205
Email: info.nz@leviat.com

Norway

Leviat
Vestre Svanholmen 5
4313 Sandnes
Tel: +47 - 51 82 34 00
Email: info.no@leviat.com

Philippines

Leviat
2933 Regus, Joy Nostalg,
ADB Avenue
Ortigas Center
Pasig City
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Leviat
Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

Leviat
14 Benoi Crescent
Singapore 629977
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Leviat
Poligono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Leviat
Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Leviat
Hertistrasse 25
8304 Wallisellen
Tel: +41 - 44 - 849 78 78
Email: info.ch@leviat.com

United Kingdom

Leviat
A1/A2 Portland Close
Houghton Regis LU5 5AW
Tel: +44 - 1582 - 470 300
Email: info.uk@leviat.com

USA / Canada

Leviat
6467 S Falkenburg Rd.
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed

Email: info@leviat.com

Leviat.com

For information on certified management systems and standards see www.ancon.co.uk | www.aschwanden.com | www.halfen.com

Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

