

**Technische Information** (Irrtum vorbehalten und Haftung ausgeschlossen)

**Nr.13303 für ( Größe 50, Nr.10075 )**

**Rollo mit Verdunkelung und Fliegengitter.**



d-marina-team GmbH  
Am Voßberg 21  
23758 Oldenburg i.H.  
Tel.:04361 507800  
Fax: 04361 5078018  
[info@marina-team.de](mailto:info@marina-team.de)  
[www.marina-team.de](http://www.marina-team.de)

Diese Kombination aus einer 100 % Verdunkelungsblende und einem separaten Fliegengitter ist optimal zur Nachrüstung geeignet. Es besteht mit einer modernen Rahmenform, äußerst einfacher Installation und einem leicht zu säuberndem, UV-beständigem Kunststoffprofil. Gehäusefarbe: weiß. Erhältlich für verschiedene LEWMAR Luken.

Leicht zu montieren

d-marina-team GmbH

Sanfte Kanten, flaches Design

ideal für Boote mit dünnen Decks und leichter oder keiner Wölbung in der Decke

**Technische Daten:**

Gehäusefarbe weiß

Material 100% Verdunkelung Solar (Weiß), Fliegengitter (Weiß).

Montage Aufgesetzt, kein Einbau.

Eckenradius Standard: Radius 42



Beispielbilder





## INSTALLATION INSTRUCTIONS

### You will need

Power drill, drill bit  $\varnothing 2.5\text{mm}$  (1/8"), cross headed screwdriver.



### Assembly instructions

- 1 Slide the corner radius into the grooves located at each end of the two roller cassette units.
- 2 Align the corner radius with grooves found in the side rails, slot together and screw into place using the four small screws provided.

### Mounting instructions

Ensure that the thickness of the boat structure at the proposed mounting position is deep enough to prevent the fixing screws from breaking through. If necessary, use shorter fixing screws than those supplied. Use masking tape on the drill bit as a guide to avoid drilling too deep. Ensure that the fixing screws supplied are suitable for the headliner material. Offer the assembled Skyscreen up to the aperture to check the fit. If the hatch has a trim you must either install around the trim (b), or carefully cut the trim away leaving behind a flat surface (c). Open the four screw fixing covers located on each corner, mark and then drill four fixing holes into the boat structure. If the screen is to be fitted on to a soft headlining, we recommend the use of M4 plastic washers (not supplied) to shim between the screen and headlining. This will help to avoid distortion of the frame and overcompressing the headlining material.


- 4 Pre-load screws into each corner and wind in the first two or three threads.
- 4a An alternative fixing position is available through the corner radius. Drill out the indentations in the four corner radius to open up the fixing holes.
- 5 Fix the blind in position by screwing through the four corners with the long screws provided. Take care not to over-tighten the screws. It is recommended that another person holds the Skyscreen in position whilst it is being fixed into place. Snap the corner covers closed on completion.
- 6 Once installed, test the Skyscreen for distortion caused during the installation process (distortion would cause the unit to jam).

### Care and maintenance

- It is recommended to lubricate the side rails with a silicon spray to ensure that the blind continues to run smoothly through the runners. Never use grease or oil.
- The spring systems are stainless steel and do not require servicing. The spring tension may be altered.
- The fabric of the blind is polyester and can be wiped clean. If the blind gets wet, pull the fabric out and leave to dry naturally.
- Never use acetone or similar solvents to clean the extrusion. (Handle with care at all times as plastic can scratch).
- All Oceanair component parts may be replaced if damaged. To identify the specifications of your Skyscreen please refer to the label on the back of the frame.

### Optional hatchliner

- For further information on available trim solutions, please contact your local Oceanair distributor, [www.oceanair.co.uk/distributors](http://www.oceanair.co.uk/distributors)

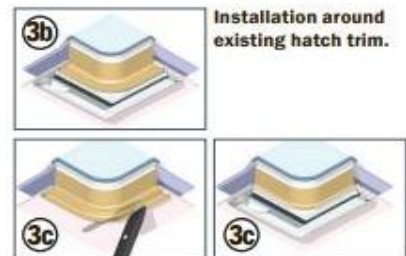

Installation over existing ABS hatch trim.



Das Trim-Kit für die Standard-Luke von Lewmar verdeckt Lücken zwischen dem Rollo und dem Luken-Rahmen. Das einfache und moderne Design ist strapazierfähig und einfach zu reinigen. Außerdem punktet es mit seiner Leichtigkeit und seiner UV-Stabilität. Die Tiefe kann einfach zugeschnitten werden.

